

## SUSPENSION PANEL 600 ROD 100 MM DALI VERSION

<b>Number of heads</b>	1
<b>Mounting</b>	Track mounting
<b>Lamps description</b>	Top LED 40W 3195 lm 2700K CRI 90
<b>Luminaire luminous flux</b>	See reference number
<b>Voltage (V)</b>	48
<b>Environment</b>	Indoor
<b>Notes</b>	Only compatible with DALI, I-10V, FLOS SMART CONTROL profile version.

### OPTICAL

<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric

### ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class III

### PHYSICAL

<b>Weight (kg)</b>	4,5
--------------------	-----




### Suspension Panel 600 Rod 100 mm Dali Version



designed by Vincent Van Duysen

<div>Suspended luminaire with rigid rod, to be installed in the Infra-Structure system.</div>

- 03.8140.40.DA - 113° - 1529lm White / White
- 03.8140.14.DA - 114° - 1486lm Black / Gold

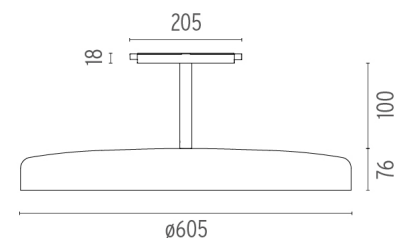

### CERTIFICATIONS

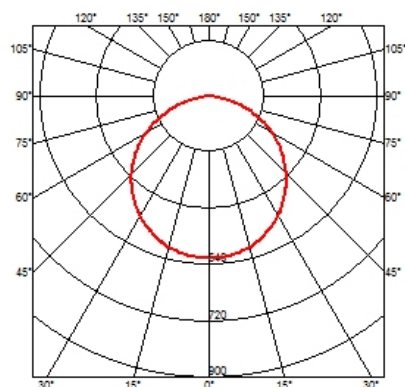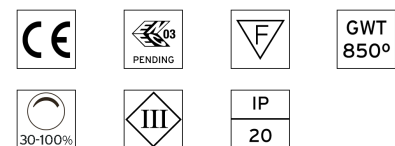

## Suspension Panel 600 Rod 100 mm Dali Version . Lamps



**Top LED**

**Lamp category:**

LED

**Socket:**

Special base

**Lamp type:**



Top LED




**Suspension Panel 600 Rod 100 mm Dali Version**

designed by Vincent Van Duysen

<div>Suspended luminaire with rigid rod, to be installed in the Infra-Structure system.</div>

-  03.8140.40.DA - 113° - 1529lm White / White
-  03.8140.14.DA - 114° - 1486lm Black / Gold

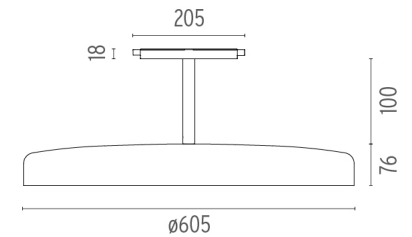

**CERTIFICATIONS**

