

SPOT I20 DIMMABLE I-10V

Number of heads	1
Mounting	Track mounting
Lamps description	LED Array 12,5W 1075 lm 2700K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	48
Environment	Indoor
Notes	Accessories included (honeycomb and screening crosspiece). Only compatible with DALI, I-10V, FLOS SMART CONTROL profile version.



OPTICAL




Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	17° Medium

Spot I20 Dimmable I-10V designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet/ Infra-Structure System.</div>


ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic dimmable I-10V
Emergency	Without
Insulation class	Class III


	03.8154.40.1V - 654lm	White
	03.8154.05.1V - 654lm	Chrome
	03.8154.14.1V - 654lm	Black

PHYSICAL

Spot diameter (mm)	46
Construction material	Aluminium
Weight (kg)	0,30



CERTIFICATIONS

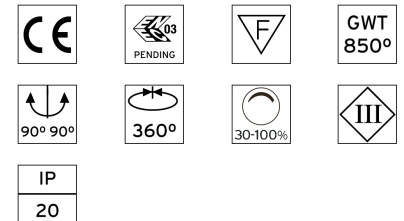

Spot 120 Dimmable I-10V . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:


LED Array



Spot 120 Dimmable I-10V
designed by FLOS Architectural

<div>Accent lighting LED module to be installed in The Tracking Magnet/ Infra-Structure System.</div>

- 03.8154.40.1V - 654lm White
- 03.8154.05.1V - 654lm Chrome
- 03.8154.14.1V - 654lm Black



CERTIFICATIONS

