

## LIGHT SHADOW ADJUSTABLE TRIM 2 SPOTS OPTIC SPOT

<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	Power LED 5,4W 560 lm 3000K CRI 90
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Environment</b>	Indoor
<b>Notes</b>	Pre-installation frame not required.

### OPTICAL

<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	10° Spot

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL

<b>Recessed depth (mm)</b>	75
<b>Weight (kg)</b>	0,25





**Light Shadow Adjustable Trim 2 Spots Optic Spot**



designed by FLOS Architectural

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included.

- 03.8888.40 - 432lm White / White
- ◐ 03.8888.14 - 432lm Black / White
- ◑ 03.8890.40 - 435lm White / Chrome
- ◒ 03.8890.14 - 435lm Black / Chrome
- ◓ 03.8891.40 - 429lm White / Matt Gold
- ◔ 03.8891.14 - 429lm Black / Matt Gold
- ◕ 03.8889.40 - 423lm White / Black
- ◖ 03.8889.14 - 423lm Black / Black

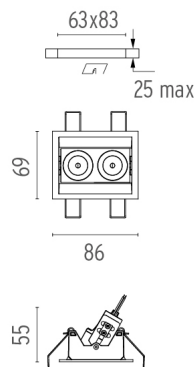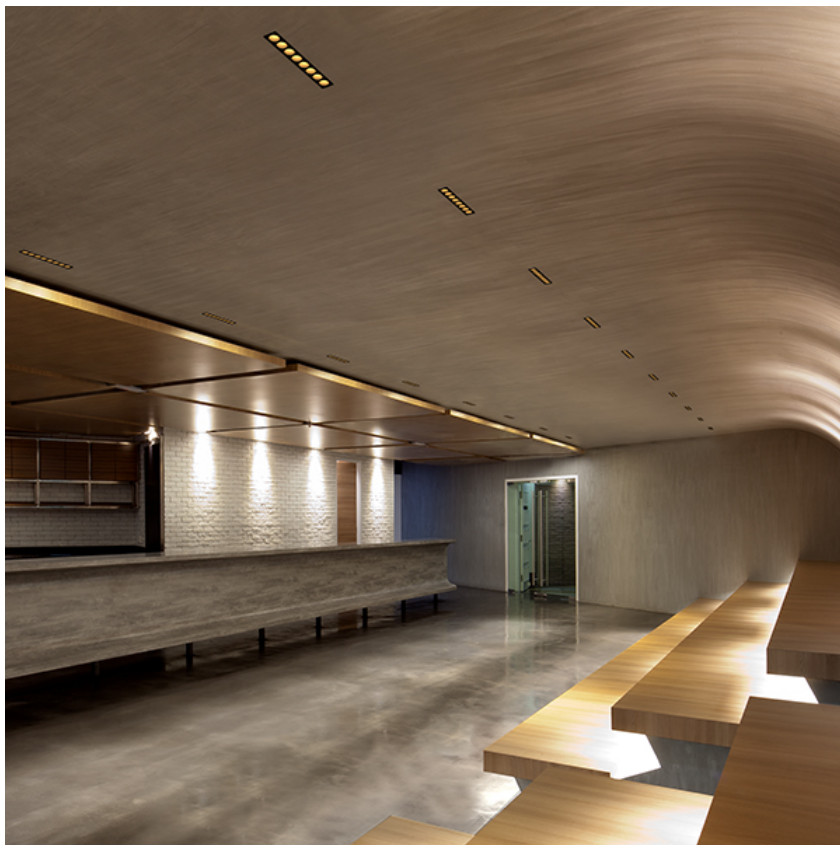

### CERTIFICATIONS

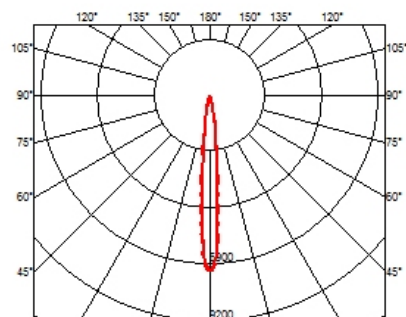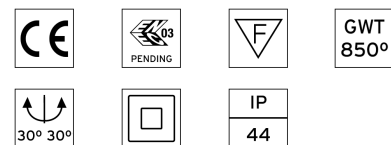

## Light Shadow Adjustable Trim 2 Spots Optic Spot . Lamps



**Power LED**

**Lamp category:**  
LED

**Socket:**  
Special base

**Lamp type:**  
Power LED




### Light Shadow Adjustable Trim 2 Spots Optic Spot

designed by FLOS Architectural

Recessed integrated luminaire with 2  
LED lighting spots. Remote power  
supply included.

	03.8888.40 - 432lm	White / White
	03.8888.14 - 432lm	Black / White
	03.8890.40 - 435lm	White / Chrome
	03.8890.14 - 435lm	Black / Chrome
	03.8891.40 - 429lm	White / Matt Gold
	03.8891.14 - 429lm	Black / Matt Gold
	03.8889.40 - 423lm	White / Black
	03.8889.14 - 423lm	Black / Black

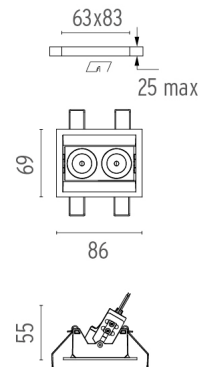

### CERTIFICATIONS

