

LIGHT SHADOW ADJUSTABLE TRIM 8 SPOTS OPTIC SPOT

Mounting	Ceiling recessed
Lamps description	Power LED 21,6W 2080 lm 2700K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Pre-installation frame not required.

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	10° Spot

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class II

PHYSICAL

Recessed depth (mm)	75
Weight (kg)	0,50





Light Shadow Adjustable Trim 8 Spots Optic Spot



designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

- 03.8900.40 - 1620lm White / White
- 03.8900.14 - 1620lm Black / White
- ◐ 03.8902.40 - 1631lm White / Chrome
- ◑ 03.8902.14 - 1631lm Black / Chrome
- ◒ 03.8903.40 - 1607lm White / Matt Gold
- ◓ 03.8903.14 - 1607lm Black / Matt Gold
- ◔ 03.8901.40 - 1586lm White / Black
- ◕ 03.8901.14 - 1586lm Black / Black

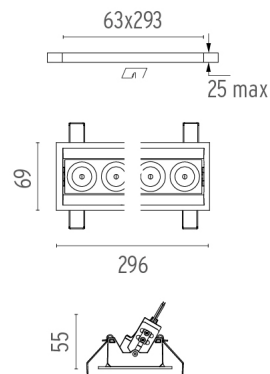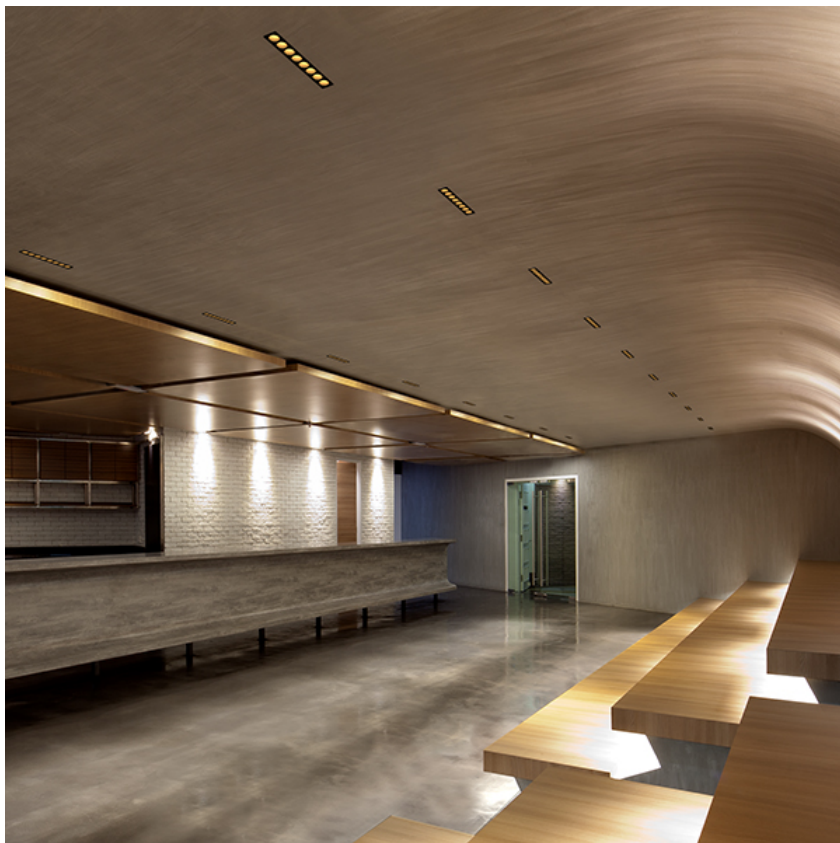

CERTIFICATIONS

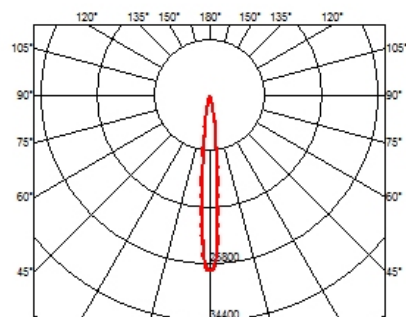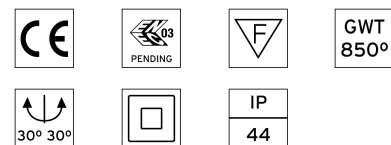

Light Shadow Adjustable Trim 8 Spots Optic Spot . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED




Light Shadow Adjustable Trim 8 Spots Optic Spot

designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

- | | | |
|--|---------------------|-------------------|
| | 03.8900.40 - 1620lm | White / White |
| | 03.8900.14 - 1620lm | Black / White |
| | 03.8902.40 - 1631lm | White / Chrome |
| | 03.8902.14 - 1631lm | Black / Chrome |
| | 03.8903.40 - 1607lm | White / Matt Gold |
| | 03.8903.14 - 1607lm | Black / Matt Gold |
| | 03.8901.40 - 1586lm | White / Black |
| | 03.8901.14 - 1586lm | Black / Black |

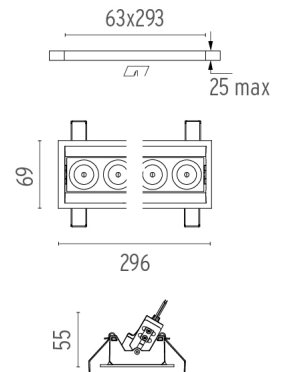

CERTIFICATIONS

