

LIGHT SHADOW ADJUSTABLE TRIM 12 SPOTS OPTIC SPOT

Mounting	Ceiling recessed
Lamps description	Power LED 32,4W 3120 lm 2700K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Pre-installation frame not required.

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	10° Spot

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class II

PHYSICAL

Recessed depth (mm)	75
Weight (kg)	0,66





Light Shadow Adjustable Trim 12 Spots Optic Spot



designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

- 03.8908.40 - 2430lm White / White
- 03.8908.14 - 2430lm Black / White
- ◐ 03.8910.40 - 2447lm White / Chrome
- ◑ 03.8910.14 - 2447lm Black / Chrome
- ◒ 03.8911.40 - 2411lm White / Matt Gold
- ◓ 03.8911.14 - 2411lm Black / Matt Gold
- ◔ 03.8909.40 - 2379lm White / Black
- ◕ 03.8909.14 - 2379lm Black / Black

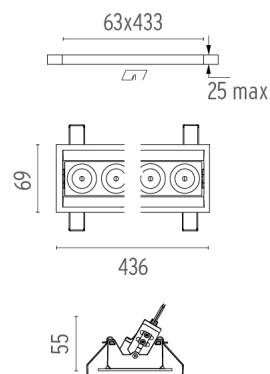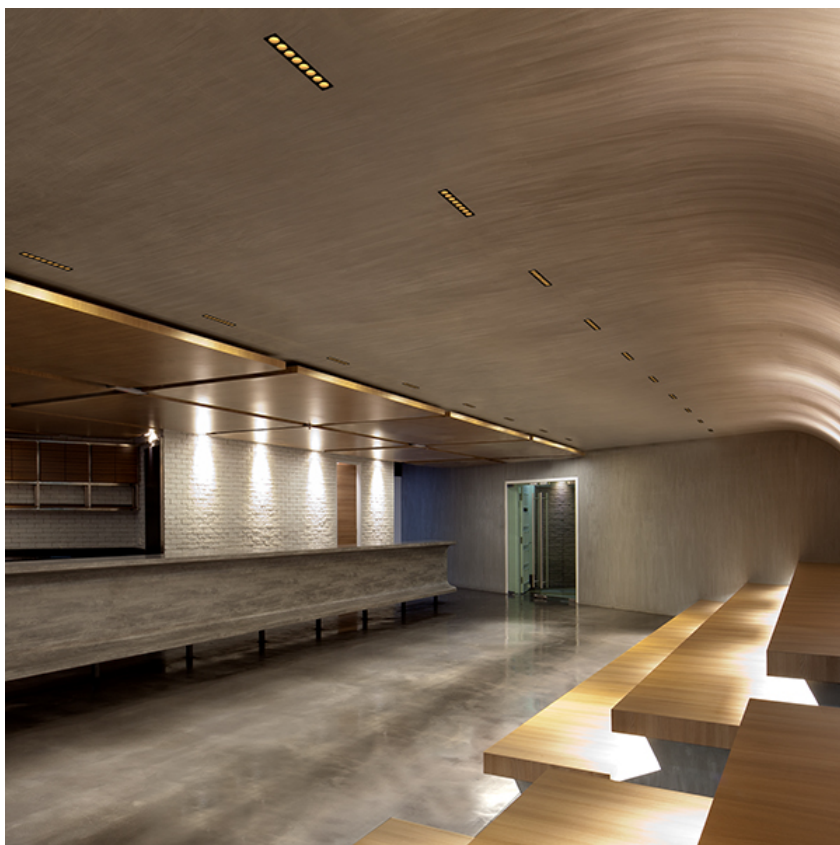

CERTIFICATIONS

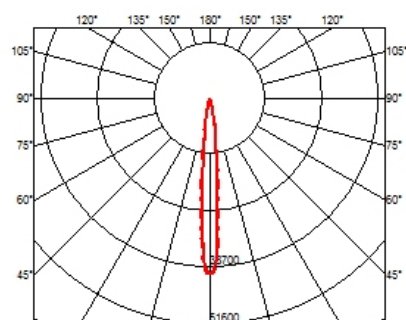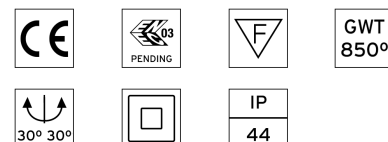

Light Shadow Adjustable Trim 12 Spots Optic Spot . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED




Light Shadow Adjustable Trim 12 Spots Optic Spot

designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

- | | | |
|--|---------------------|-------------------|
| | 03.8908.40 - 2430lm | White / White |
| | 03.8908.14 - 2430lm | Black / White |
| | 03.8910.40 - 2447lm | White / Chrome |
| | 03.8910.14 - 2447lm | Black / Chrome |
| | 03.8911.40 - 2411lm | White / Matt Gold |
| | 03.8911.14 - 2411lm | Black / Matt Gold |
| | 03.8909.40 - 2379lm | White / Black |
| | 03.8909.14 - 2379lm | Black / Black |

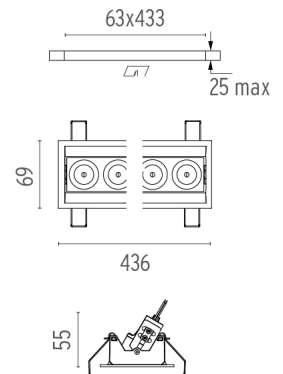

CERTIFICATIONS

