

LIGHT SHADOW ADJUSTABLE TRIM 12 SPOTS OPTIC SPOT

Mounting	Ceiling recessed
Lamps description	Power LED 32,4W 3360 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Pre-installation frame not required.

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	10° Spot

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class II

PHYSICAL

Recessed depth (mm)	75
Weight (kg)	0,66




**Light Shadow Adjustable Trim
12 Spots Optic Spot**



designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

	03.8912.40 - 2593lm	White / White
	03.8912.14 - 2593lm	Black / White
	03.8914.40 - 2612lm	White / Chrome
	03.8914.14 - 2612lm	Black / Chrome
	03.8915.40 - 2573lm	White / Matt Gold
	03.8915.14 - 2573lm	Black / Matt Gold
	03.8913.40 - 2539lm	White / Black
	03.8913.14 - 2539lm	Black / Black

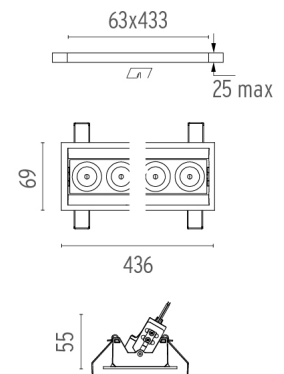

CERTIFICATIONS

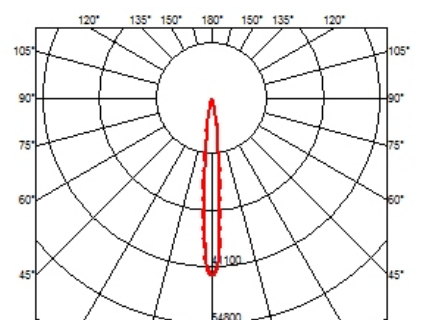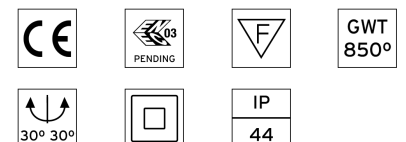

Light Shadow Adjustable Trim 12 Spots Optic Spot . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED




Light Shadow Adjustable Trim 12 Spots Optic Spot

designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

- | | | |
|--|---------------------|-------------------|
| | 03.8912.40 - 2593lm | White / White |
| | 03.8912.14 - 2593lm | Black / White |
| | 03.8914.40 - 2612lm | White / Chrome |
| | 03.8914.14 - 2612lm | Black / Chrome |
| | 03.8915.40 - 2573lm | White / Matt Gold |
| | 03.8915.14 - 2573lm | Black / Matt Gold |
| | 03.8913.40 - 2539lm | White / Black |
| | 03.8913.14 - 2539lm | Black / Black |

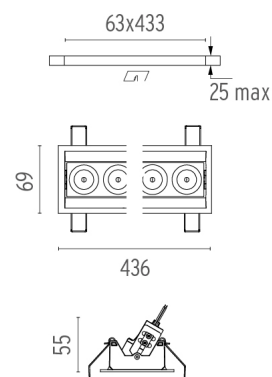

CERTIFICATIONS

