

LIGHT SHADOW ADJUSTABLE NO TRIM 8 SPOTS OPTIC SPOT

Mounting Ceiling recessed

Lamps descriptionPower LED 21,6W 2240 lm 3000K CRI 90Luminaire luminous fluxExtreme Cut-off. See reference number

Environment Indoor

Notes It requires an pre-installation frame, to be ordered separately.

y.

OPTICAL

Aiming Adjustable
Light distribution symmetry Symmetric
Beam angle 10° Spot


ELECTRICAL

Transformer availability Included
Transformer mounting Remote
Transformer type Electronic
Emergency Without
Insulation class Class II

PHYSICAL

 Recessed depth (mm)
 75

 Weight (kg)
 0,50

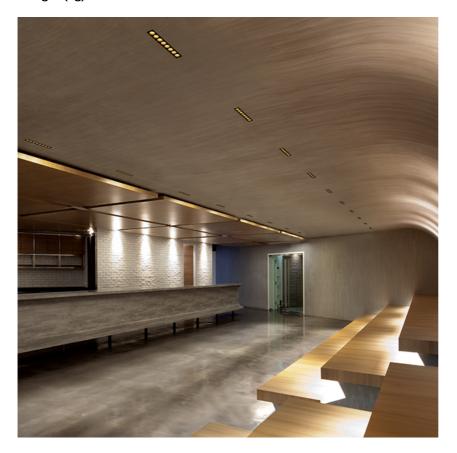


Light Shadow Adjustable No Trim 8 Spots Optic Spot

designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

03.8936.40 - 1729lm White / White 03.8936.14 - 1729lm Black / White a 03.8938.40 - 1741lm White / Chrome 03.8938.14 - 1741lm Black / Chrome **3.8939.40 - 1715lm** White / Matt Gold 03.8939.14 - 1715lm Black / Matt Gold **●** 03.8937.40 - 1692lm White / Black 03.8937.14 - 1692lm Black / Black



CERTIFICATIONS




















Light Shadow Adjustable No Trim 8 Spots Optic Spot . Accessories

Mounting





08.0517.00

08.0059.90

Pre-installation frame. Adjustable No Trim 8L Accessory for mounting of No Trim continuous line

Accessory for mounting of No Trim continuous line. Each accessory allows connection between two No Trim preinstallation frames.

Light Shadow Adjustable No Trim 8 Spots Optic Spot . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Light Shadow Adjustable No Trim 8 Spots Optic Spot

designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

03.8936.40 - 1729lm	White / White
03.8936.14 - 1729lm	Black / White
03.8938.40 - 1741lm	White / Chrome
03.8938.14 - 1741lm	Black / Chrome
o3.8939.40 - 1715lm	White / Matt Gold
03.8939.14 - 1715lm	Black / Matt Gold
0 3.8937.40 - 1692lm	White / Black
03.8937.14 - 1692lm	Black / Black



CERTIFICATIONS















