

LIGHT SHADOW ADJUSTABLE NO TRIM 12 SPOTS OPTIC SPOT

Mounting Ceiling recessed

Power LED 32,4W 3360 Im 3000K CRI 90 Lamps description Luminaire luminous flux Extreme Cut-off. See reference number

Environment Indoor

Notes It requires an pre-installation frame, to be ordered separately

OPTICAL


Aiming Adjustable Light distribution symmetry Symmetric Beam angle 10° Spot

ELECTRICAL

Transformer availability Included Transformer mounting Remote Transformer type Electronic Without **Emergency Insulation class** Class II

PHYSICAL

Recessed depth (mm) 75 Weight (kg) 0,66

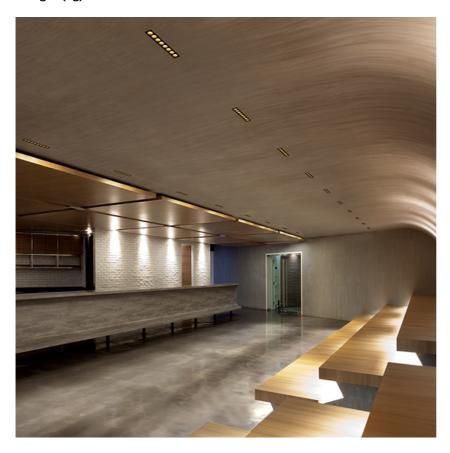




Light Shadow Adjustable No Trim 12 Spots Optic Spot

designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

03.8944.40 - 2593lm White / White 03.8944.14 - 2593lm Black / White a 03.8946.40 - 2612lm White / Chrome 03.8946.14 - 2612lm Black / Chrome 03.8947.40 - 2573lm White / Matt Gold 03.8947.14 - 2573lm Black / Matt Gold ● 03.8945.40 - 2539lm White / Black 03.8945.14 - 2539lm Black / Black



CERTIFICATIONS






















Light Shadow Adjustable No Trim 12 Spots Optic Spot . Accessories

Mounting





08.0518.00

08.0059.90

Pre-installation frame. Adjustable No Trim 12L Accessory for mounting of No Trim continuous line

Accessory for mounting of No Trim continuous line. Each accessory allows connection between two No Trim preinstallation frames.

Light Shadow Adjustable No Trim 12 Spots Optic Spot . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Light Shadow Adjustable No Trim 12 Spots Optic Spot

designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

03.8944.40 - 2593lm	White / White
0 3.8944.14 - 2593lm	Black / White
03.8946.40 - 2612lm	White / Chrome
03.8946.14 - 2612lm	Black / Chrome
o3.8947.40 - 2573lm	White / Matt Gold
0 3.8947.14 - 2573lm	Black / Matt Gold
3.8945.40 - 2539lm	White / Black
03.8945.14 - 2539lm	Black / Black



CERTIFICATIONS















