

LIGHT SHADOW FIXED NO TRIM 4 SPOTS OPTIC MEDIUM

Mounting Ceiling recessed

Lamps descriptionPower LED 10,8W 1040 Im 2700K CRI 90Luminaire luminous fluxExtreme Cut-off. See reference number

Environment Indoor

Notes It requires an pre-installation frame, to be ordered separately.

OPTICAL


Aiming Fixed
Light distribution symmetry Symmetric
Beam angle 23° Medium

ELECTRICAL

Transformer availability Included
Transformer mounting Remote
Transformer type Electronic
Emergency Without
Insulation class Class II

PHYSICAL

Length (mm) 140
Recessed depth (mm) 75
Weight (kg) 0,34

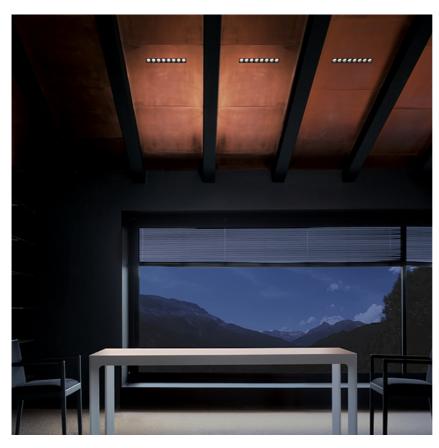




Light Shadow Fixed No Trim 4 Spots Optic Medium

designed by FLOS Architectural

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included.

03.9220.40 - 790lm	White / White
703.9220.14 - 790lm	Black / White
03.9222.40 - 801lm	White / Chrome
03.9222.14 - 801lm	Black / Chrome
o3.9223.40 - 786lm	White / Matt Gold
03.9223.14 - 786lm	Black / Matt Gold
3.9221.40 - 776lm	White / Black
03.9221.14 - 776lm	Black / Black



CERTIFICATIONS


















Light Shadow Fixed No Trim 4 Spots Optic Medium . Accessories

Mounting





08.0511.00

08.0052.90

Pre-installation frame. Fixed No Trim 4L

Accessory for mounting of No Trim continuous line

Accessory for mounting of No Trim continuous line. Each accessory allows connection between two No Trim preinstallation frames.

Light Shadow Fixed No Trim 4 Spots Optic Medium . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Light Shadow Fixed No Trim 4 Spots Optic Medium

designed by FLOS Architectural

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included.

03.9220.40 - 790lm	White / White
703.9220.14 - 790lm	Black / White
03.9222.40 - 801lm	White / Chrome
03.9222.14 - 801lm	Black / Chrome
o3.9223.40 - 786lm	White / Matt Gold
0 3.9223.14 - 786lm	Black / Matt Gold
3.9221.40 - 776lm	White / Black
03.9221.14 - 776lm	Black / Black



CERTIFICATIONS













