

# LIGHT SHADOW FIXED NO TRIM 12 SPOTS OPTIC FLOOD

**Mounting** Ceiling recessed

Lamps descriptionPower LED 32,4W 3120 Im 2700K CRI 90Luminaire luminous fluxExtreme Cut-off. See reference number

**Environment** Indoor

**Notes** It requires an pre-installation frame, to be ordered separately.

# **OPTICAL**


Aiming Fixed
Light distribution symmetry Symmetric
Beam angle 33° Flood

### **ELECTRICAL**

Transformer availability Included
Transformer mounting Remote
Transformer type Electronic
Emergency Without
Insulation class Class II

### **PHYSICAL**


Length (mm)420Recessed depth (mm)75Weight (kg)0,66

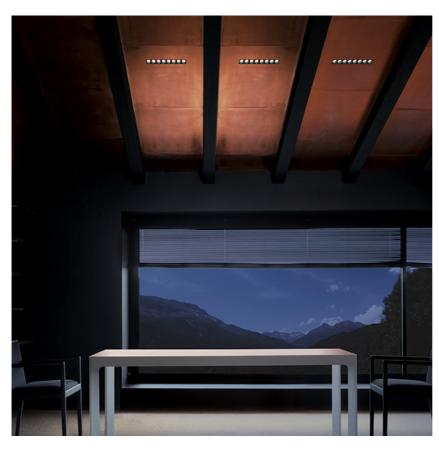



Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

03.9265.40 - 2364lm	White / White
03.9265.14 - 2364lm	Black / White
03.9267.40 - 2417lm	White / Chrome
03.9267.14 - 2417lm	Black / Chrome
03.9268.40 - 2343lm	White / Matt Gold
03.9268.14 - 2343lm	Black / Matt Gold
03.9266.40 - 2296lm	White / Black
03.9266.14 - 2296lm	Black / Black



### **CERTIFICATIONS**


















# Light Shadow Fixed No Trim 12 Spots Optic Flood . Accessories

### Mounting





08.0513.00

08.0052.90

Pre-installation frame. Fixed No Trim 12L

Accessory for mounting of No Trim continuous line

Accessory for mounting of No Trim continuous line. Each accessory allows connection between two No Trim pre-installation frames.

# Light Shadow Fixed No Trim 12 Spots Optic Flood . Lamps



**Power LED** 

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Light Shadow Fixed No Trim 12 Spots Optic Flood

designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

03.9265.40 - 2364lm White / White 03.9265.14 - 2364lm Black / White 03.9267.40 - 2417lm White / Chrome Black / Chrome 03.9267.14 - 2417lm o3.9268.40 - 2343lm White / Matt Gold 03.9268.14 - 2343lm Black / Matt Gold **▲** 03.9266.40 - 2296lm White / Black 03.9266.14 - 2296lm Black / Black



### **CERTIFICATIONS**













