FLOS

LIGHT SHADOW FIXED NO TRIM 12 SPOTS OPTIC MEDIUM

Mounting	Ceiling recessed
Lamps description	Power LED 32,4W 3360 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	It requires an pre-installation frame, to be ordered separately.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	23° Medium

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class II

PHYSICAL

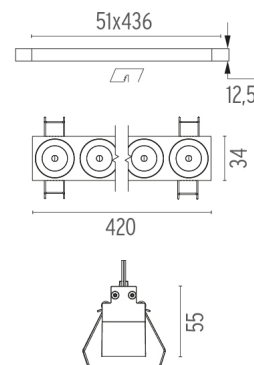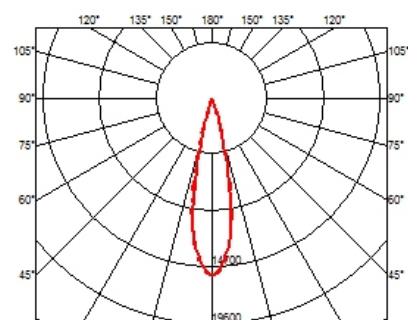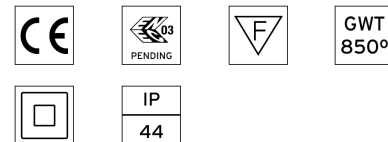|	
Length (mm)	420
Recessed depth (mm)	75
Weight (kg)	0,66

Light Shadow Fixed No Trim 12 Spots Optic Medium

designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

	03.9270.40 - 2528lm	White / White
	03.9270.14 - 2528lm	Black / White
	03.9272.40 - 2564lm	White / Chrome
	03.9272.14 - 2564lm	Black / Chrome
	03.9273.40 - 2517lm	White / Matt Gold
	03.9273.14 - 2517lm	Black / Matt Gold
	03.9271.40 - 2484lm	White / Black
	03.9271.14 - 2484lm	Black / Black

CERTIFICATIONS

CE | ⚡03 PENDING | F | GWT 850°

□ | IP 44

FLOS

Light Shadow Fixed No Trim 12 Spots Optic Medium . Accessories

Mounting

○ 08.0513.00

**Pre-installation frame.
Fixed No Trim 12L**

○ 08.0052.90

**Accessory for mounting of
No Trim continuous line**

Accessory for mounting of No
Trim continuous line. Each
accessory allows connection
between two No Trim pre-
installation frames.

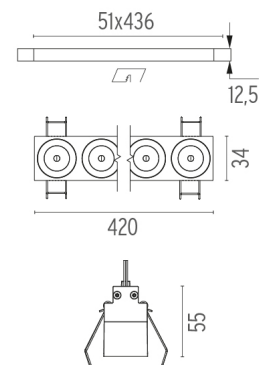## Light Shadow Fixed No Trim 12 Spots Optic Medium . Lamps

Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED

Light Shadow Fixed No Trim
12 Spots Optic Medium

designed by FLOS Architectural

Recessed integrated luminaire with 12
LED lighting spots. Remote power
supply included.

	03.9270.40 - 2528lm	White / White
	03.9270.14 - 2528lm	Black / White
	03.9272.40 - 2564lm	White / Chrome
	03.9272.14 - 2564lm	Black / Chrome
	03.9273.40 - 2517lm	White / Matt Gold
	03.9273.14 - 2517lm	Black / Matt Gold
	03.9271.40 - 2484lm	White / Black
	03.9271.14 - 2484lm	Black / Black

51x436
12,5
34
420
55

CERTIFICATIONS

CE   03 PENDING   F   GWT 850º

□   IP 44