

## LIGHT SHADOW ADJUSTABLE TRIM 2 SPOTS OPTIC FLOOD

<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	Power LED 5,4W 520 lm 2700K CRI 90
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Environment</b>	Indoor
<b>Notes</b>	Pre-installation frame not required.

### OPTICAL

<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	33° Flood

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL

<b>Recessed depth (mm)</b>	75
<b>Weight (kg)</b>	0,25




**Light Shadow Adjustable Trim 2 Spots Optic Flood**



designed by FLOS Architectural

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included.

	03.9305.40 - 394lm	White / White
	03.9305.14 - 394lm	Black / White
	03.9307.40 - 403lm	White / Chrome
	03.9307.14 - 403lm	Black / Chrome
	03.9308.40 - 390lm	White / Matt Gold
	03.9308.14 - 390lm	Black / Matt Gold
	03.9306.40 - 383lm	White / Black
	03.9306.14 - 383lm	Black / Black

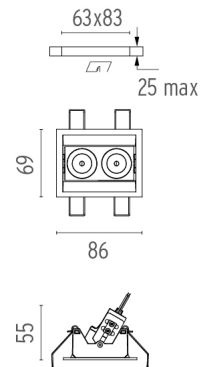

### CERTIFICATIONS

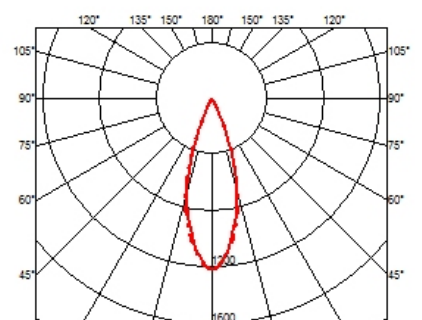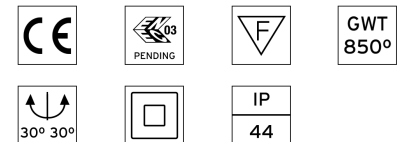

## Light Shadow Adjustable Trim 2 Spots Optic Flood . Lamps



**Power LED**

**Lamp category:**  
LED

**Socket:**  
Special base

**Lamp type:**  
Power LED




### Light Shadow Adjustable Trim 2 Spots Optic Flood

designed by FLOS Architectural

Recessed integrated luminaire with 2  
LED lighting spots. Remote power  
supply included.

	03.9305.40 - 394lm	White / White
	03.9305.14 - 394lm	Black / White
	03.9307.40 - 403lm	White / Chrome
	03.9307.14 - 403lm	Black / Chrome
	03.9308.40 - 390lm	White / Matt Gold
	03.9308.14 - 390lm	Black / Matt Gold
	03.9306.40 - 383lm	White / Black
	03.9306.14 - 383lm	Black / Black

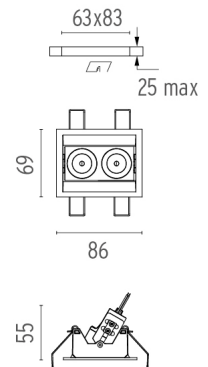

### CERTIFICATIONS

