

LIGHT SHADOW ADJUSTABLE TRIM 4 SPOTS OPTIC FLOOD

Mounting	Ceiling recessed
Lamps description	Power LED 10,8W 1120 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Pre-installation frame not required.

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	33° Flood

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class II

PHYSICAL

Recessed depth (mm)	75
Weight (kg)	0,34





Light Shadow Adjustable Trim 4 Spots Optic Flood



designed by FLOS Architectural

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included.

- 03.9335.40 - 841lm White / White
- 03.9335.14 - 841lm Black / White
- ◐ 03.9337.40 - 860lm White / Chrome
- ◑ 03.9337.14 - 860lm Black / Chrome
- ◒ 03.9338.40 - 833lm White / Matt Gold
- ◓ 03.9338.14 - 833lm Black / Matt Gold
- ◔ 03.9336.40 - 817lm White / Black
- ◕ 03.9336.14 - 817lm Black / Black

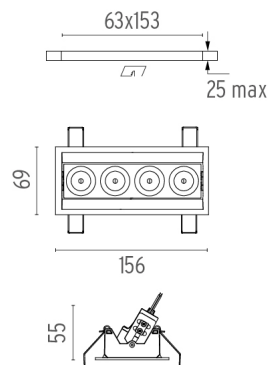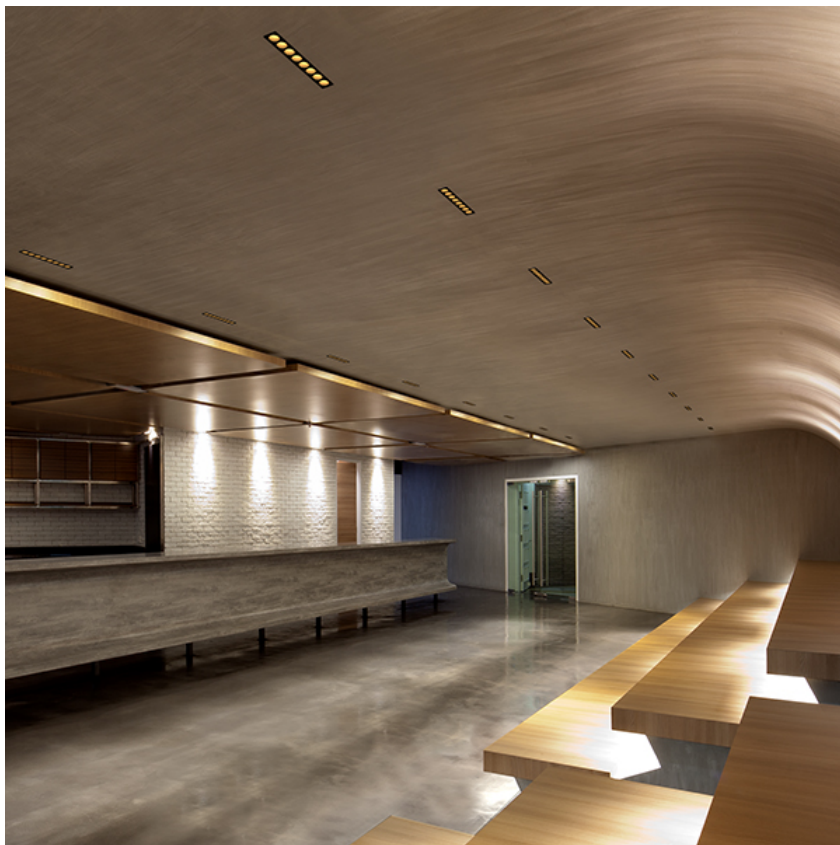

CERTIFICATIONS

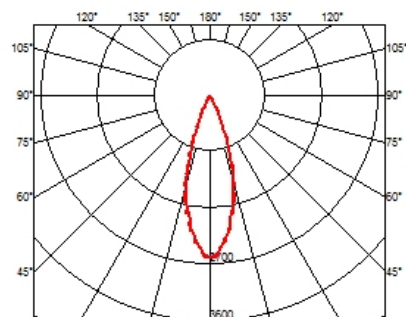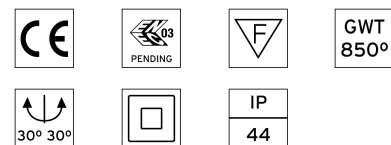

Light Shadow Adjustable Trim 4 Spots Optic Flood . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED




Light Shadow Adjustable Trim 4 Spots Optic Flood

designed by FLOS Architectural

Recessed integrated luminaire with 4
LED lighting spots. Remote power
supply included.

	03.9335.40 - 841lm	White / White
	03.9335.14 - 841lm	Black / White
	03.9337.40 - 860lm	White / Chrome
	03.9337.14 - 860lm	Black / Chrome
	03.9338.40 - 833lm	White / Matt Gold
	03.9338.14 - 833lm	Black / Matt Gold
	03.9336.40 - 817lm	White / Black
	03.9336.14 - 817lm	Black / Black

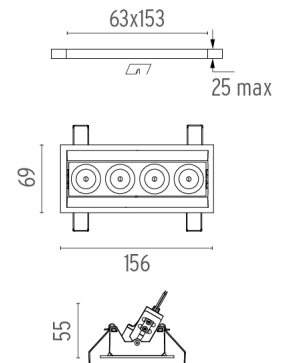

CERTIFICATIONS

