

LIGHT SHADOW ADJUSTABLE TRIM 8 SPOTS OPTIC FLOOD

Mounting	Ceiling recessed
Lamps description	Power LED 21,6W 2080 lm 2700K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Pre-installation frame not required.

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	33° Flood

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class II

PHYSICAL

Recessed depth (mm)	75
Weight (kg)	0,50





Light Shadow Adjustable Trim 8 Spots Optic Flood



designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

- 03.9345.40 - 1576lm White / White
- 03.9345.14 - 1576lm Black / White
- ◐ 03.9347.40 - 1611lm White / Chrome
- ◑ 03.9347.14 - 1611lm Black / Chrome
- ◒ 03.9348.40 - 1562lm White / Matt Gold
- ◓ 03.9348.14 - 1562lm Black / Matt Gold
- ◔ 03.9346.40 - 1531lm White / Black
- ◕ 03.9346.14 - 1531lm Black / Black

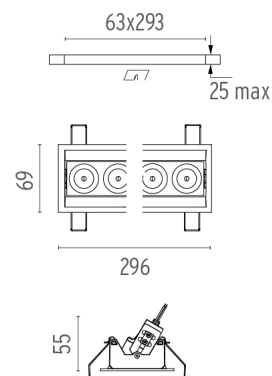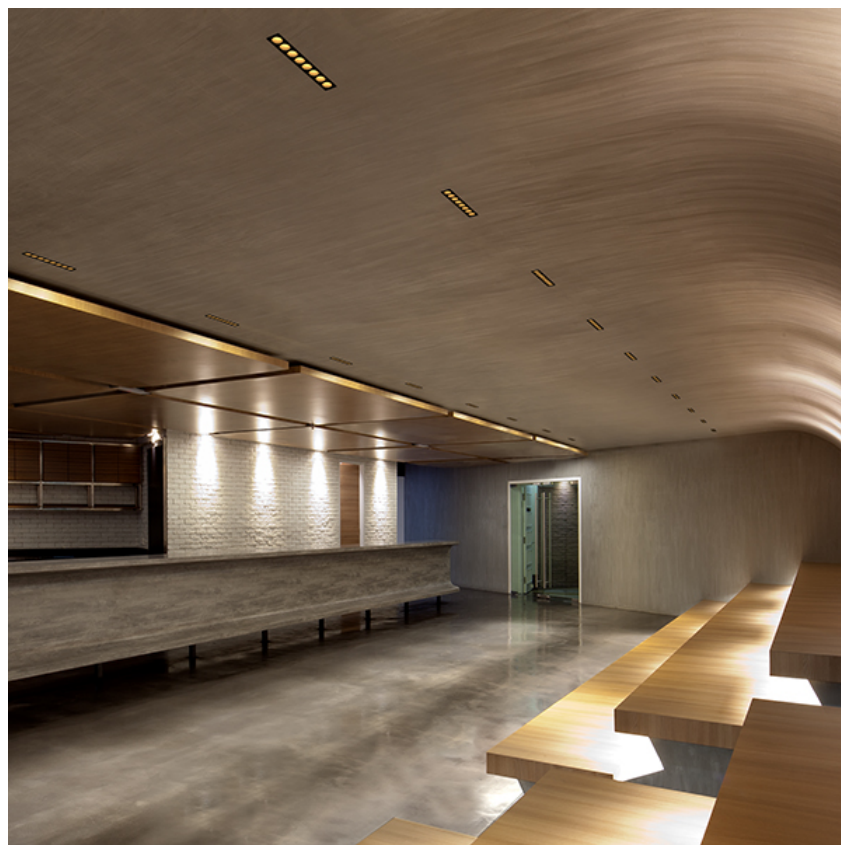

CERTIFICATIONS

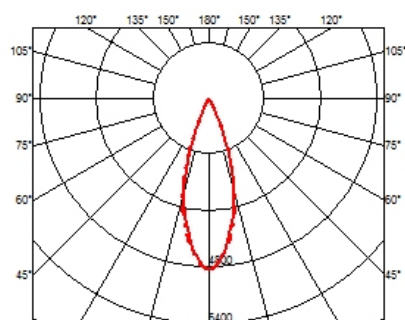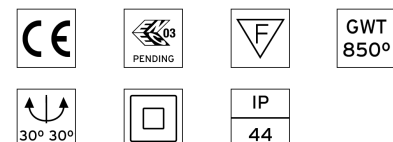

Light Shadow Adjustable Trim 8 Spots Optic Flood . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED




**Light Shadow Adjustable Trim
8 Spots Optic Flood**

designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

-  03.9345.40 - 1576lm White / White
-  03.9345.14 - 1576lm Black / White
-  03.9347.40 - 1611lm White / Chrome
-  03.9347.14 - 1611lm Black / Chrome
-  03.9348.40 - 1562lm White / Matt Gold
-  03.9348.14 - 1562lm Black / Matt Gold
-  03.9346.40 - 1531lm White / Black
-  03.9346.14 - 1531lm Black / Black

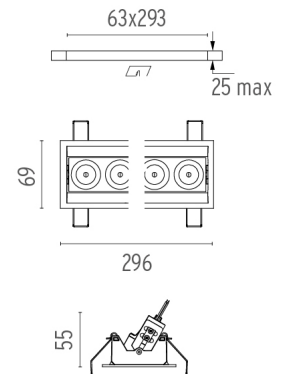

CERTIFICATIONS

