

LIGHT SHADOW ADJUSTABLE TRIM DALI VERSION 8 SPOTS OPTIC MEDIUM

Mounting Ceiling recessed

Lamps descriptionPower LED 21,6W 2240 lm 3000K CRI 90Luminaire luminous fluxExtreme Cut-off. See reference number

Environment Indoor

Notes Pre-installation frame not required.

OPTICAL

Aiming Adjustable
Light distribution symmetry Symmetric
Beam angle 23° Medium

ELECTRICAL

Transformer availability Included
Transformer mounting Remote


Transformer type Electronic dimmable dali

Emergency Without Insulation class Class II

PHYSICAL

 Recessed depth (mm)
 75

 Weight (kg)
 0,50

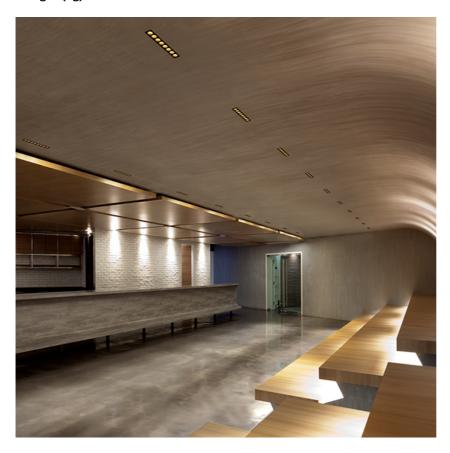



Light Shadow Adjustable Trim Dali Version 8 Spots Optic Medium

designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

03.9350.40.DA - 1686lm White / White


03.9350.14.DA - 1686lm Black / White

03.9352.40.DA - 1709lm White / Chrome

03.9352.14.DA - 1709lm Black / Chrome

03.9353.40.DA - 1678lm White / Matt Gold
 03.9353.14.DA - 1678lm Black / Matt Gold

03.9351.40.DA - 1656lm White / Black 03.9351.14.DA - 1656lm Black / Black



CERTIFICATIONS






















Light Shadow Adjustable Trim Dali Version 8 Spots Optic Medium . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED



Light Shadow Adjustable Trim Dali Version 8 Spots Optic Medium

designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

03.9350.40.DA - 1686lm White / White

03.9350.14.DA - 1686lm Black / White

03.9352.40.DA - 1709lm White / Chrome


03.9352.14.DA - 1709lm Black / Chrome

03.9353.40.DA - 1678lm White / Matt Gold

03.9353.14.DA - 1678lm Black / Matt Gold

03.9351.40.DA - 1656lm White / Black

03.9351.14.DA - 1656lm Black / Black



CERTIFICATIONS

















