

LIGHT SHADOW ADJUSTABLE TRIM 8 SPOTS OPTIC MEDIUM

Mounting	Ceiling recessed
Lamps description	Power LED 21,6W 2240 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Pre-installation frame not required.

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	23° Medium

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class II

PHYSICAL

Recessed depth (mm)	75
Weight (kg)	0,50




Light Shadow Adjustable Trim 8 Spots Optic Medium



designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

	03.9350.40 - 1686lm	White / White
	03.9350.14 - 1686lm	Black / White
	03.9352.40 - 1709lm	White / Chrome
	03.9352.14 - 1709lm	Black / Chrome
	03.9353.40 - 1678lm	White / Matt Gold
	03.9353.14 - 1678lm	Black / Matt Gold
	03.9351.40 - 1656lm	White / Black
	03.9351.14 - 1656lm	Black / Black

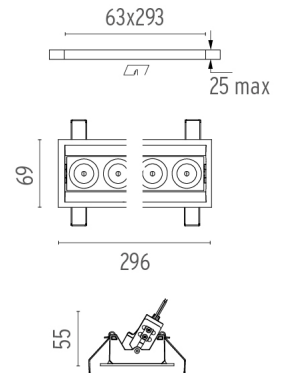

CERTIFICATIONS

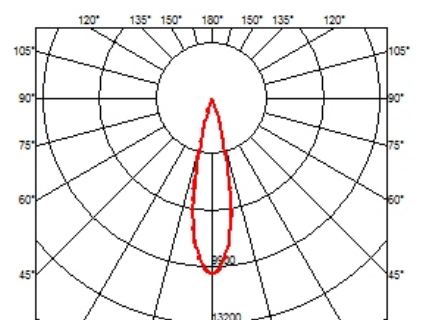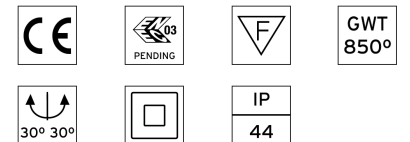

Light Shadow Adjustable Trim 8 Spots Optic Medium . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED




Light Shadow Adjustable Trim 8 Spots Optic Medium

designed by FLOS Architectural

Recessed integrated luminaire with 8
LED lighting spots. Remote power
supply included.

- | | | |
|--|---------------------|-------------------|
| | 03.9350.40 - 1686lm | White / White |
| | 03.9350.14 - 1686lm | Black / White |
| | 03.9352.40 - 1709lm | White / Chrome |
| | 03.9352.14 - 1709lm | Black / Chrome |
| | 03.9353.40 - 1678lm | White / Matt Gold |
| | 03.9353.14 - 1678lm | Black / Matt Gold |
| | 03.9351.40 - 1656lm | White / Black |
| | 03.9351.14 - 1656lm | Black / Black |

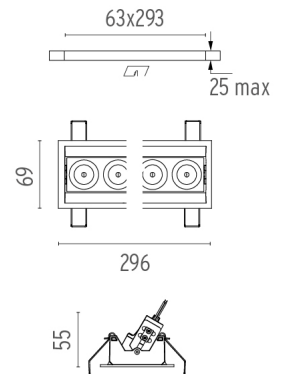

CERTIFICATIONS

