

LIGHT SHADOW ADJUSTABLE NO TRIM 8 SPOTS OPTIC MEDIUM

Mounting Ceiling recessed

Lamps descriptionPower LED 21,6W 2240 Im 3000K CRI 90Luminaire luminous fluxExtreme Cut-off. See reference number

Environment Indoor

Notes It requires an pre-installation frame, to be ordered separately.

OPTICAL

Aiming Adjustable
Light distribution symmetry Symmetric
Beam angle 23° Medium


ELECTRICAL

Transformer availability Included
Transformer mounting Remote
Transformer type Electronic
Emergency Without
Insulation class Class II

PHYSICAL

 Recessed depth (mm)
 75

 Weight (kg)
 0,50

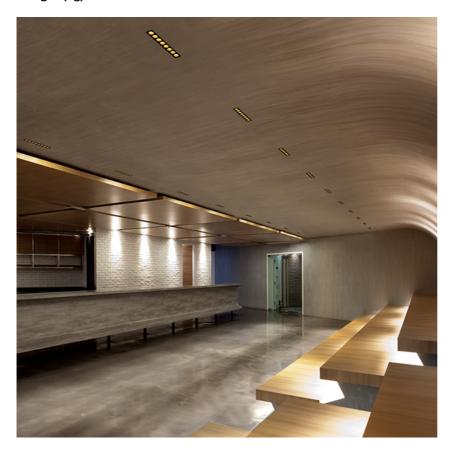




Light Shadow Adjustable No Trim 8 Spots Optic Medium

designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

03.9450.40 - 1686lm White / White 03.9450.14 - 1686lm Black / White a 03.9452.40 - 1709lm White / Chrome 03.9452.14 - 1709lm Black / Chrome 03.9453.40 - 1678lm White / Matt Gold 03.9453.14 - 1678lm Black / Matt Gold **●** 03.9451.40 - 1656lm White / Black 03.9451.14 - 1656lm Black / Black



CERTIFICATIONS




















Light Shadow Adjustable No Trim 8 Spots Optic Medium . Accessories

Mounting





08.0517.00

08.0059.90

Pre-installation frame. Adjustable No Trim 8L Accessory for mounting of No Trim continuous line

Accessory for mounting of No Trim continuous line. Each accessory allows connection between two No Trim preinstallation frames.

Light Shadow Adjustable No Trim 8 Spots Optic Medium . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Light Shadow Adjustable No Trim 8 Spots Optic Medium

designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included.

03.9450.40 - 1686lm White / White 03.9450.14 - 1686lm Black / White 03.9452.40 - 1709lm White / Chrome 03.9452.14 - 1709lm Black / Chrome o3.9453.40 - 1678lm White / Matt Gold 03.9453.14 - 1678lm Black / Matt Gold **△** 03.9451.40 - 1656lm White / Black 03.9451.14 - 1656lm Black / Black



CERTIFICATIONS















