

LIGHT SHADOW ADJUSTABLE NO TRIM 12 SPOTS OPTIC FLOOD

Mounting Ceiling recessed

Power LED 32,4W 3360 Im 3000K CRI 90 Lamps description Luminaire luminous flux Extreme Cut-off. See reference number

Environment Indoor

Notes It requires an pre-installation frame, to be ordered separately

OPTICAL


Aiming Adjustable Light distribution symmetry Symmetric Beam angle 33° Flood

ELECTRICAL

Transformer availability Included Transformer mounting Remote Transformer type Electronic Without **Emergency Insulation class** Class II

PHYSICAL

Recessed depth (mm) 75 Weight (kg) 0,66

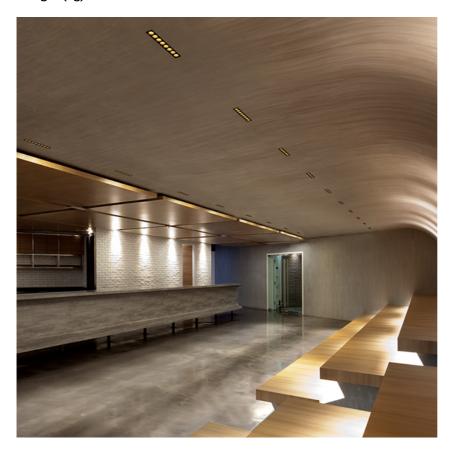




Light Shadow Adjustable No Trim 12 Spots Optic Flood

designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

03.9475.40 - 2523lm White / White 03.9475.14 - 2523lm Black / White a 03.9477.40 - 2580lm White / Chrome 03.9477.14 - 2580lm Black / Chrome 03.9478.40 - 2500lm White / Matt Gold 03.9478.14 - 2500lm Black / Matt Gold **d** 03.9476.40 - 2451lm White / Black 03.9476.14 - 2451lm Black / Black



CERTIFICATIONS






















Light Shadow Adjustable No Trim 12 Spots Optic Flood . Accessories

Mounting





08.0518.00

08.0059.90

Pre-installation frame. Adjustable No Trim 12L Accessory for mounting of No Trim continuous line

Accessory for mounting of No Trim continuous line. Each accessory allows connection between two No Trim preinstallation frames.

Light Shadow Adjustable No Trim 12 Spots Optic Flood . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Light Shadow Adjustable No Trim 12 Spots Optic Flood

designed by FLOS Architectural

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included.

03.9475.40 - 2523lm White / White 03.9475.14 - 2523lm Black / White 03.9477.40 - 2580lm White / Chrome 03.9477.14 - 2580lm Black / Chrome o3.9478.40 - 2500lm White / Matt Gold 03.9478.14 - 2500lm Black / Matt Gold **△** 03.9476.40 - 2451lm White / Black 03.9476.14 - 2451lm Black / Black



CERTIFICATIONS















