FLOS

BATTERY TRIM SMALL IL

L

Indoor

Aluminum

Adjustable

Symmetric

29° Flood

Separate item

149

Aluminium

Ceiling recessed

Number of heads Mounting Lamps description Luminaire luminous flux Environment

OPTICAL

Reflector finish Aiming Light distribution symmetry Beam angle

ELECTRICAL

Transformer availability Transformer mounting Transformer type

Emergency Insulation class

PHYSICAL

Recessed depth (mm) Construction material Weight (kg) Remote Electronic, Electronic dimmable, Electronic dimmable I-I0V, Electronic dimmable dali Without Class III

LED Array DC 700 mA 20W 2290 lm 3000K CRI 80

Extreme Cut-off. See reference number








Battery Trim Small IL designed by F.A. Porsche

Embedded luminaire for LED light source. Power supply not included.










FLOS

Battery Trim Small IL. Accessories

Optical

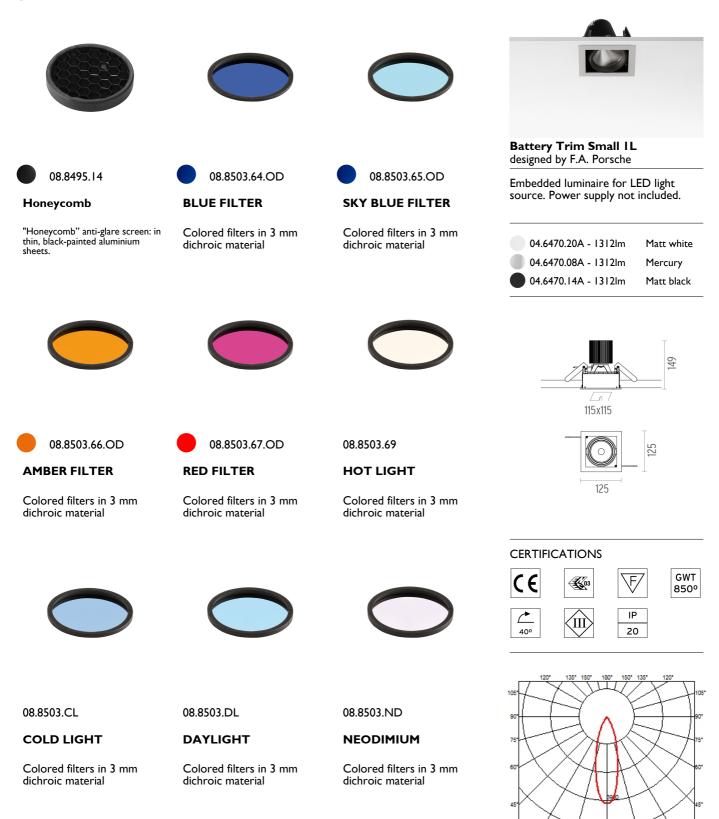

(

Battery Trim Small IL. Accessories

Power Supply







Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15



60.8533

Constant Current Power Supply for LED. 25W

adjustable 350/500/700mA I-10V switch or push dimming.

Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15

Constant Current Power Supply for LED. 25-50W Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through

Continuous current power supply of 25-50W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/550/650/700/750/850/ 900/1050mA Dali switch, 1-10V witch or such dimski switch or push dimming.

60.8530

and a start

Maximum lenght of 1.5 mm2 secundary conductor (m): 10


Maximum lenght of 2.5 mm2 secundary conductor (m): 15



Battery Trim Small IL designed by F.A. Porsche

Embedded luminaire for LED light source. Power supply not included.

04.6470.20A - 1312lm	Matt white
04.6470.08A - 1312lm	Mercury
04.6470.14A - 1312lm	Matt black



60.9073

Continuous current power supply of 13-42W


Continuous current power supply of 13-42W, 220/240V - 50/60Hz with power current selected through adjustable 300/ 350/400/450/500/550/600/650/700/ 750/800/850/900/950/1000/1050 mA.


Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15



CERTIFICATIONS





FLOS

Battery Trim Small IL . Lamps



LED Array LED Socket: Special base Lamp type: LED Array



Battery Trim Small IL designed by F.A. Porsche

Embedded luminaire for LED light source. Power supply not included.



