

BATTERY TRIM SMALL IL

Number of heads

Mounting Ceiling recessed

LED Array DC 700 mA 20W 2290 lm 3000K CRI 80

Luminaire luminous flux Extreme Cut-off. See reference number

Environment Indoor

OPTICAL

Reflector finish Aluminum
Aiming Adjustable
Light distribution symmetry Symmetric
Beam angle 44° Wide Flood

ELECTRICAL

Transformer availability Separate item
Transformer mounting Remote


Transformer type Electronic, Electronic dimmable, Electronic dimmable

I-10V, Electronic dimmable dali

Emergency Without Insulation class III

PHYSICAL

Recessed depth (mm) 149
Construction material Aluminium
Weight (kg) 0,76

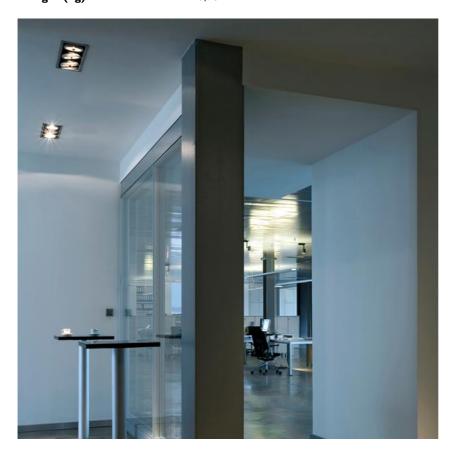





Battery Trim Small IL designed by F.A. Porsche

Embedded luminaire for LED light source. Power supply not included.

04.6471.20A - 1222lm Matt white
04.6471.08A - 1222lm Mercury
04.6471.14A - 1222lm Matt black





CERTIFICATIONS


















Flos.architectural@flos.com www.flos.com



Battery Trim Small IL. Accessories

Optical









08.8495.14

08.8503.64.OD

08.8503.65.OD

designed by F.A. Porsche Embedded luminaire for LED light

Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium

BLUE FILTER

Colored filters in 3 mm dichroic material

SKY BLUE FILTER

Colored filters in 3 mm dichroic material


04.6471.20A - 1222lm Matt white 04.6471.08A - 1222lm Mercury 04.6471.14A - 1222lm Matt black

source. Power supply not included.











08.8503.67.OD

RED FILTER

08.8503.69 **HOT LIGHT** 125

AMBER FILTER

Colored filters in 3 mm dichroic material

Colored filters in 3 mm dichroic material

Colored filters in 3 mm dichroic material







CERTIFICATIONS





 $\langle III \rangle$



ΙP

20

GWT 850°

COLD LIGHT

08.8503.CL

Colored filters in 3 mm dichroic material

08.8503.DL


DAYLIGHT

Colored filters in 3 mm dichroic material

08.8503.ND

NEODIMIUM

Colored filters in 3 mm dichroic material



Flos.architectural@flos.com www.flos.com



Battery Trim Small IL. Accessories

Power Supply









60.8534

Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15

60.8533

Constant Current Power Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA 1-10V switch or push dimming.

Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15

60.8530

Constant Current Power Supply for LED. 25-50W

Continuous current power supply of 25-50W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/550/650/700/750/850/900/1050mA Dali switch, I-10V switch or push dimming.

Maximum lenght of 1.5 mm2 secundary conductor (m): 10


Maximum lenght of 2.5 mm2 secundary conductor (m): 15


Battery Trim Small IL designed by F.A. Porsche

Embedded luminaire for LED light source. Power supply not included.

04.6471.20A - 1222lm Matt white
04.6471.08A - 1222lm Mercury
04.6471.14A - 1222lm Matt black







60.9073

Continuous current power supply of 13-42W

Continuous current power supply of 13-42W, 220/240V - 50/60Hz with power current selected through adjustable 300/ 350/400/450/500/550/600/650/700/ 750/800/850/900/950/1000/1050 mA.

Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15

CERTIFICATIONS


















Flos.architectural@flos.com



Battery Trim Small IL. Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:


LED Array



Battery Trim Small IL designed by F.A. Porsche

Embedded luminaire for LED light source. Power supply not included.

04.6471.20A - 1222lm Matt white
04.6471.08A - 1222lm Mercury
04.6471.14A - 1222lm Matt black



CERTIFICATIONS















