

## BATTERY NO TRIM SMALL IL

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	LED Array DC 700 mA 20W 2290 lm 3000K CRI 80
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Environment</b>	Indoor
<b>Notes</b>	Pre-installation frame must be ordered separately

### OPTICAL

<b>Reflector finish</b>	Aluminum
<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	44° Wide Flood

### ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic, Electronic dimmable, Electronic dimmable I-10V, Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class III

### PHYSICAL


<b>Recessed depth (mm)</b>	146
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	1,01



**Battery No Trim Small IL**  
designed by F.A. Porsche




Embedded luminaire for LED light source. Power supply not included.

● 04.6471.14ANT - 1222lm Black

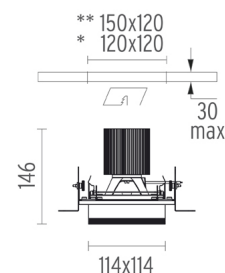

\*\* Inaccessible ceiling  
\* Accessible ceiling: modular/open

### CERTIFICATIONS

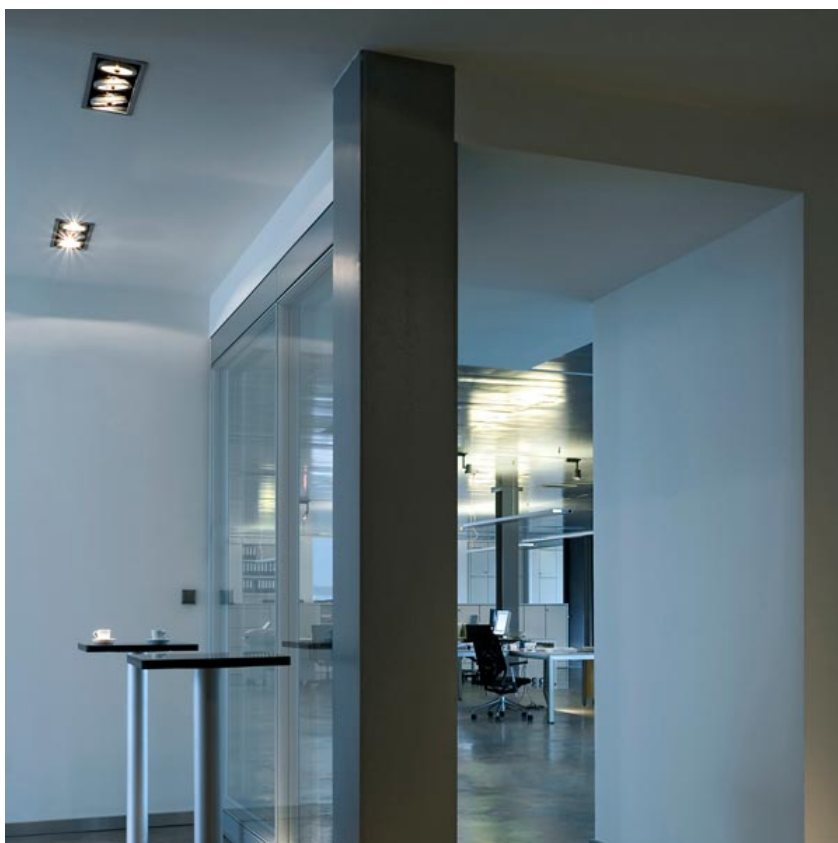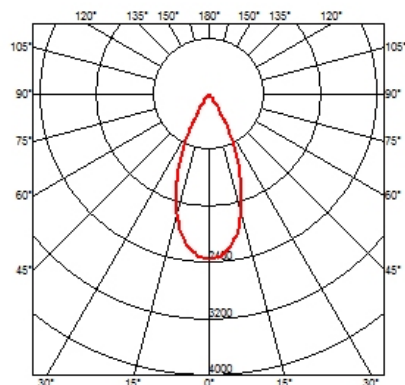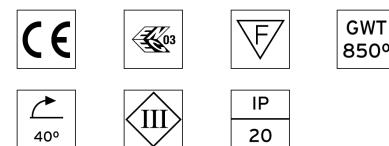

## Battery No Trim Small IL . Accessories

### Optical



● 08.8495.14

#### Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



● 08.8503.64.OD

#### BLUE FILTER

Colored filters in 3 mm dichroic material



● 08.8503.65.OD

#### SKY BLUE FILTER

Colored filters in 3 mm dichroic material



● 08.8503.66.OD

#### AMBER FILTER

Colored filters in 3 mm dichroic material



● 08.8503.67.OD

#### RED FILTER

Colored filters in 3 mm dichroic material



08.8503.69

#### HOT LIGHT

Colored filters in 3 mm dichroic material



08.8503.CL

#### COLD LIGHT

Colored filters in 3 mm dichroic material



08.8503.DL

#### DAYLIGHT

Colored filters in 3 mm dichroic material



08.8503.ND

#### NEODIMIUM


Colored filters in 3 mm dichroic material



**Battery No Trim Small IL**  
designed by F.A. Porsche


Embedded luminaire for LED light source. Power supply not included.

● 04.6471.14ANT - 1222lm Black

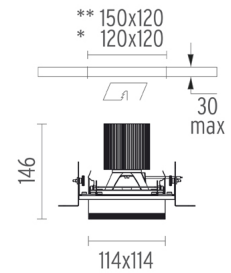

\*\* Inaccessible ceiling  
\* Accessible ceiling: modular/open

### CERTIFICATIONS

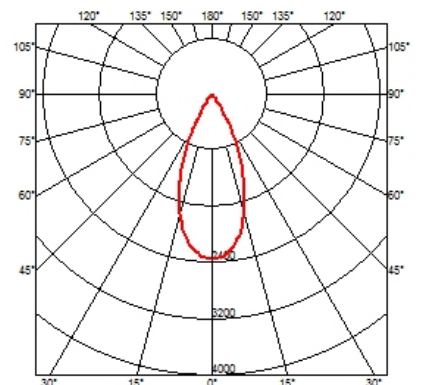

## Battery No Trim Small IL . Accessories

### Power Supply



60.8534

#### Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



60.8533

#### Constant Current Power Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA 1-10V switch or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



60.8530

#### Constant Current Power Supply for LED. 25-50W

Continuous current power supply of 25-50W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/550/650/700/750/850/900/1050mA Dali switch, 1-10V switch or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10


Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



**Battery No Trim Small IL**  
designed by F.A. Porsche

Embedded luminaire for LED light source. Power supply not included.

04.6471.14ANT - 1222lm Black

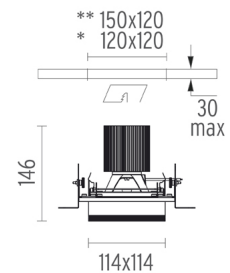

\*\* Inaccessible ceiling  
\* Accessible ceiling: modular/open

60.9073



#### Continuous current power supply of 13-42W

Continuous current power supply of 13-42W, 220/240V - 50/60Hz with power current selected through adjustable 300/350/400/450/500/550/600/650/700/750/800/850/900/950/1000/1050 mA.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10


Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15

### CERTIFICATIONS

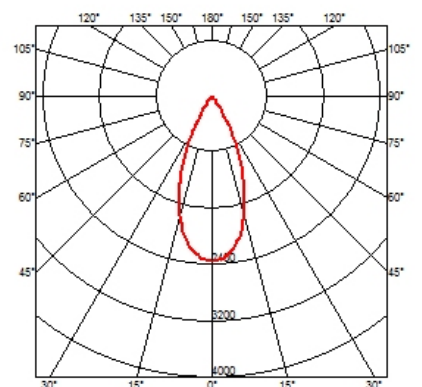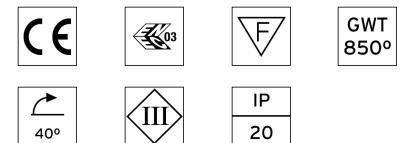

## Battery No Trim Small IL . Accessories

### Mounting



● 08.8523.00

#### Pre-installation frame

Pre-installation frame small  
single light



#### Battery No Trim Small IL designed by F.A. Porsche

Embedded luminaire for LED light  
source. Power supply not included.

● 04.6471.14ANT - 1222lm Black

## Battery No Trim Small IL . Lamps



#### LED Array

#### Lamp category:


LED

#### Socket:

Special base

#### Lamp type:

LED Array



\*\* Inaccessible ceiling  
\* Accessible ceiling: modular/open

#### CERTIFICATIONS

