

## BATTERY NO TRIM SMALL 2L

<b>Number of heads</b>	2
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	2 x LED Array DC 700 mA 20W 2290 lm 3000K CRI 80
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Environment</b>	Indoor
<b>Notes</b>	Pre-installation frame must be ordered separately

### OPTICAL


<b>Reflector finish</b>	Aluminum
<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	44° Wide Flood

### ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic, Electronic dimmable, Electronic dimmable I-10V, Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class III

### PHYSICAL


<b>Recessed depth (mm)</b>	146
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	1,89

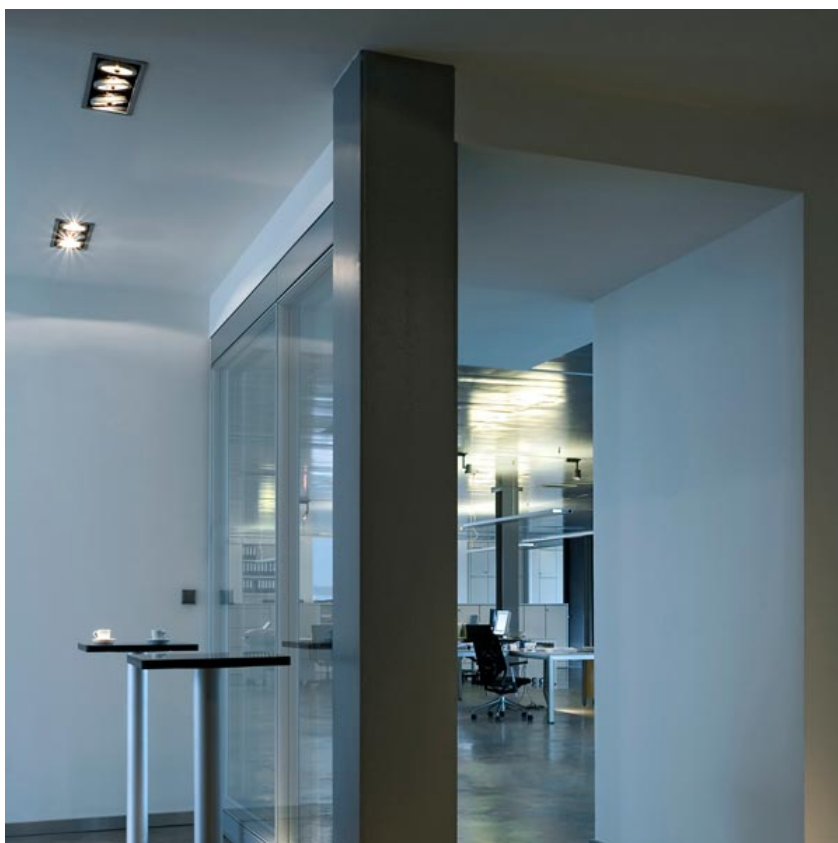

**Battery No Trim Small 2L**  
designed by F.A. Porsche



Embedded luminaire with multiple optic bodies for LED light source. Power supply not included. Requires one power supply for each optic body.

● 04.6476.14ANT - 2x1222lm Black

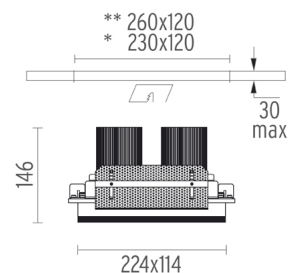

\*\* Inaccessible ceiling  
\* Accessible ceiling: modular/open

### CERTIFICATIONS

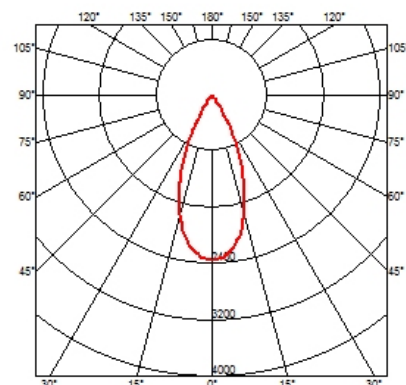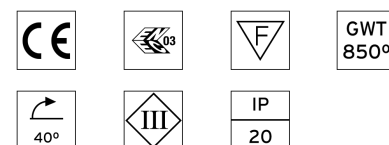

## Battery No Trim Small 2L . Accessories

### Optical



08.8495.14

#### Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



08.8503.64.OD

#### BLUE FILTER

Colored filters in 3 mm dichroic material



08.8503.65.OD

#### SKY BLUE FILTER

Colored filters in 3 mm dichroic material



08.8503.66.OD

#### AMBER FILTER

Colored filters in 3 mm dichroic material



08.8503.67.OD

#### RED FILTER

Colored filters in 3 mm dichroic material



08.8503.69

#### HOT LIGHT

Colored filters in 3 mm dichroic material



08.8503.CL

#### COLD LIGHT

Colored filters in 3 mm dichroic material



08.8503.DL

#### DAYLIGHT

Colored filters in 3 mm dichroic material



08.8503.ND

#### NEODIMIUM


Colored filters in 3 mm dichroic material



**Battery No Trim Small 2L**  
designed by F.A. Porsche



Embedded luminaire with multiple optic bodies for LED light source. Power supply not included. Requires one power supply for each optic body.

04.6476.14ANT - 2x1222lm Black

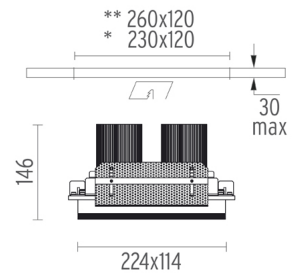

\*\* Inaccessible ceiling  
\* Accessible ceiling: modular/open

### CERTIFICATIONS

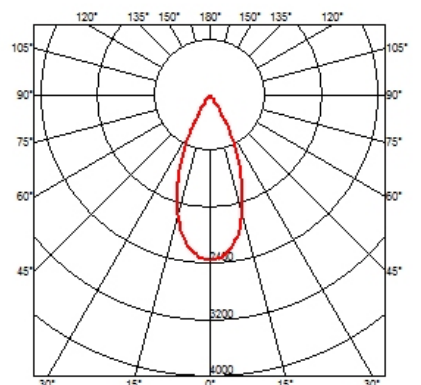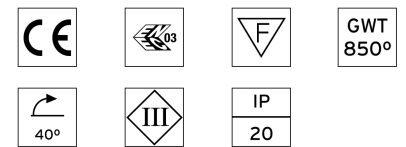

## Battery No Trim Small 2L . Accessories

### Power Supply



60.8534

#### Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



60.8533

#### Constant Current Power Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA 1-10V switch or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



60.8530

#### Constant Current Power Supply for LED. 25-50W

Continuous current power supply of 25-50W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/550/650/700/750/850/900/1050mA Dali switch, 1-10V switch or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10


Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



**Battery No Trim Small 2L**  
designed by F.A. Porsche

Embedded luminaire with multiple optic bodies for LED light source. Power supply not included. Requires one power supply for each optic body.

04.6476.14ANT - 2x1222lm Black

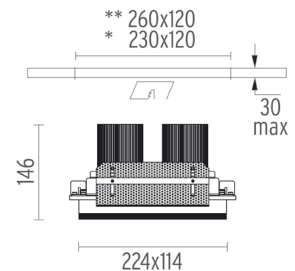

\*\* Inaccessible ceiling  
\* Accessible ceiling: modular/open

60.9073



#### Continuous current power supply of 13-42W

Continuous current power supply of 13-42W, 220/240V - 50/60Hz with power current selected through adjustable 300/350/400/450/500/550/600/650/700/750/800/850/900/950/1000/1050 mA.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10


Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15

### CERTIFICATIONS

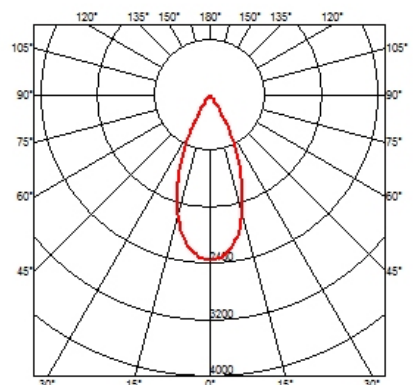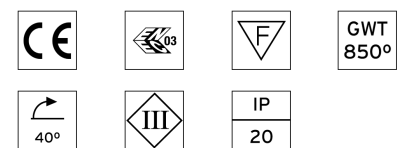

## Battery No Trim Small 2L . Accessories

### Mounting



● 08.8524.00

#### Pre-installation frame

Pre-installation frame small  
2 lights



#### Battery No Trim Small 2L designed by F.A. Porsche

Embedded luminaire with multiple  
optic bodies for LED light source.  
Power supply not included. Requires  
one power supply for each optic  
body.

● 04.6476.14ANT - 2x1222lm Black

## Battery No Trim Small 2L . Lamps



#### LED Array

#### Lamp category:


LED

#### Socket:

Special base

#### Lamp type:

LED Array

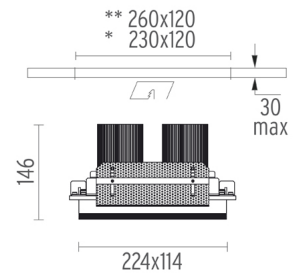

\*\* Inaccessible ceiling

\* Accessible ceiling: modular/open

#### CERTIFICATIONS

