

## BATTERY TRIM SMALL 3L

<b>Number of heads</b>	3
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	3 x LED Array DC 700 mA 20W 2290 lm 3000K CRI 80
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Environment</b>	Indoor

### OPTICAL


<b>Reflector finish</b>	Aluminum
<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	29° Flood

### ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic, Electronic dimmable, Electronic dimmable I-10V, Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class III

### PHYSICAL


<b>Recessed depth (mm)</b>	149
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	1,61

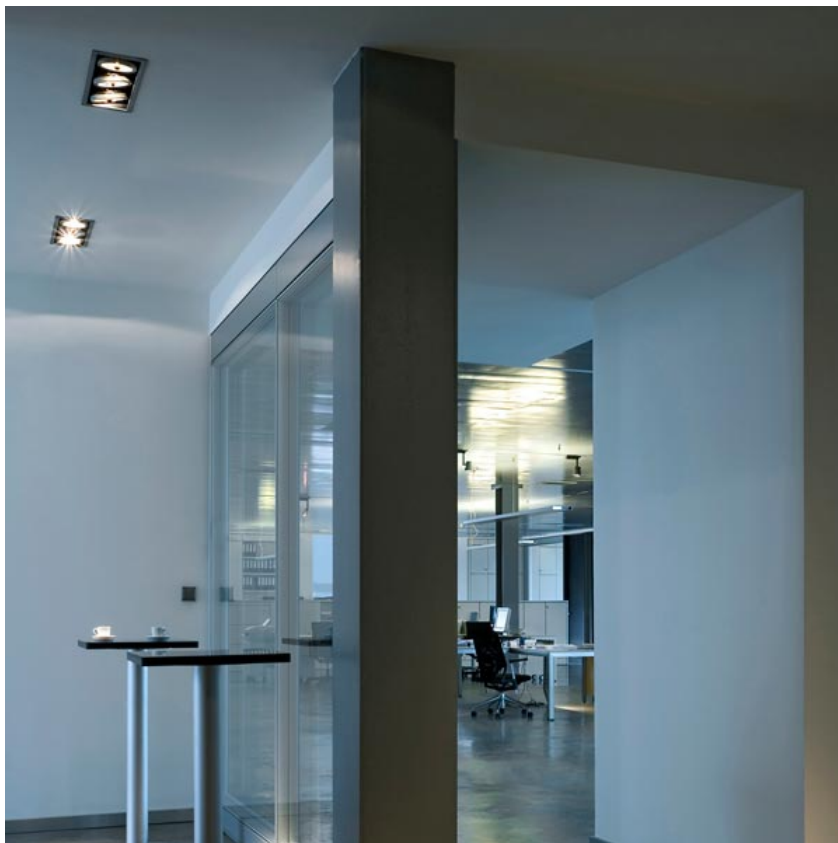



**Battery Trim Small 3L**  
designed by F.A. Porsche

Embedded luminaire with multiple optic bodies for LED light source. Power supply not included. Requires one power supply for each optic body.

- 04.6480.20A - 3x1312lm Matt white
- 04.6480.08A - 3x1312lm Mercury
- 04.6480.14A - 3x1312lm Matt black

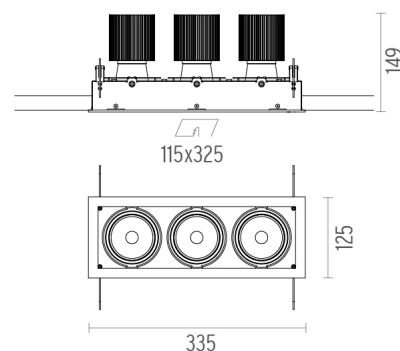

### CERTIFICATIONS

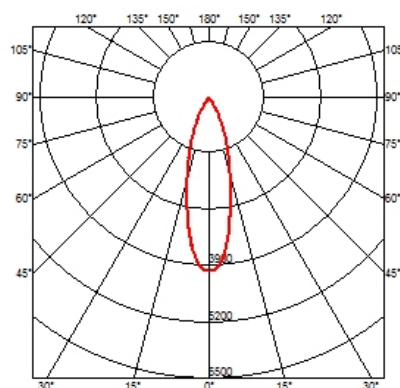

## Battery Trim Small 3L . Accessories

### Optical



08.8495.14

#### Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



08.8503.64.OD

#### BLUE FILTER

Colored filters in 3 mm dichroic material



08.8503.65.OD

#### SKY BLUE FILTER

Colored filters in 3 mm dichroic material



08.8503.66.OD

#### AMBER FILTER

Colored filters in 3 mm dichroic material



08.8503.67.OD

#### RED FILTER

Colored filters in 3 mm dichroic material



08.8503.69

#### HOT LIGHT

Colored filters in 3 mm dichroic material



08.8503.CL

#### COLD LIGHT

Colored filters in 3 mm dichroic material



08.8503.DL

#### DAYLIGHT

Colored filters in 3 mm dichroic material



08.8503.ND

#### NEODIMIUM


Colored filters in 3 mm dichroic material





**Battery Trim Small 3L**  
designed by F.A. Porsche

Embedded luminaire with multiple optic bodies for LED light source. Power supply not included. Requires one power supply for each optic body.

- 04.6480.20A - 3x1312lm Matt white
- 04.6480.08A - 3x1312lm Mercury
- 04.6480.14A - 3x1312lm Matt black

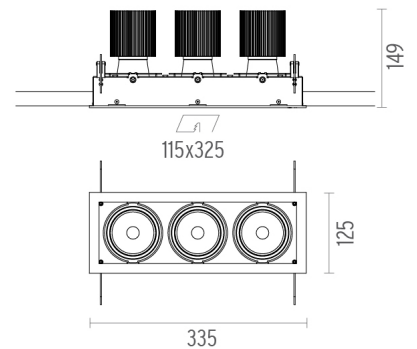

### CERTIFICATIONS

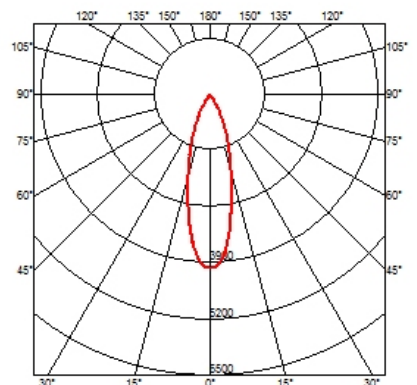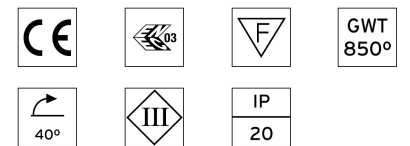

## Battery Trim Small 3L . Accessories

### Power Supply



60.8534

#### Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



60.8533



60.8530

#### Constant Current Power Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA 1-10V switch or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15

#### Constant Current Power Supply for LED. 25-50W

Continuous current power supply of 25-50W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/550/650/700/750/850/900/1050mA Dali switch, 1-10V switch or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10


Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



### Battery Trim Small 3L designed by F.A. Porsche

Embedded luminaire with multiple optic bodies for LED light source. Power supply not included. Requires one power supply for each optic body.

- 04.6480.20A - 3x1312lm Matt white
- 04.6480.08A - 3x1312lm Mercury
- 04.6480.14A - 3x1312lm Matt black

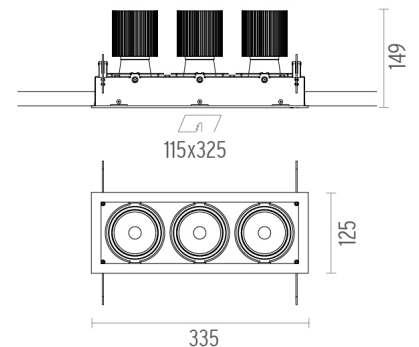

60.9073



#### Continuous current power supply of 13-42W

Continuous current power supply of 13-42W, 220/240V - 50/60Hz with power current selected through adjustable 300/350/400/450/500/550/600/650/700/750/800/850/900/950/1000/1050 mA.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15

### CERTIFICATIONS

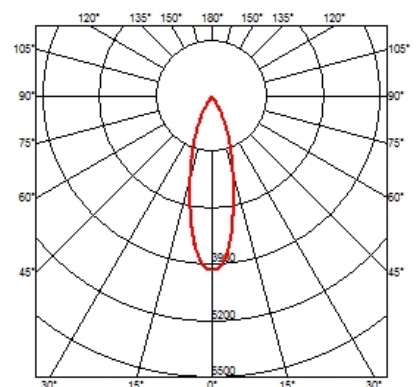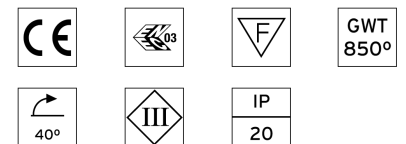

## Battery Trim Small 3L . Lamps



**LED Array**

**Lamp category:**

LED

**Socket:**

Special base

**Lamp type:**

LED Array




**Battery Trim Small 3L**

designed by F.A. Porsche

Embedded luminaire with multiple optic bodies for LED light source. Power supply not included. Requires one power supply for each optic body.

- 04.6480.20A - 3x1312lm Matt white
- 04.6480.08A - 3x1312lm Mercury
- 04.6480.14A - 3x1312lm Matt black

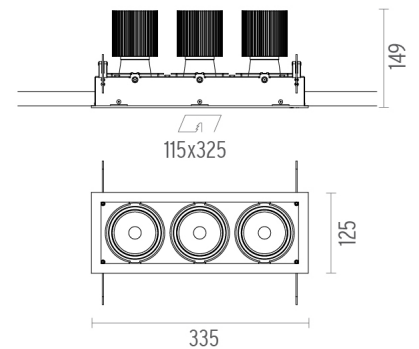

**CERTIFICATIONS**

