

## **BATTERY TRIM SMALL 4L SQUARE**

Number of heads

Mounting Ceiling recessed

Lamps description 4 x LED Array DC 700 mA 20W 2290 lm 3000K CRI 80

Luminaire luminous flux Extreme Cut-off. See reference number

**Environment** Indoor

## **OPTICAL**

Reflector finishAluminumAimingAdjustableLight distribution symmetrySymmetricBeam angle29° Flood

## **ELECTRICAL**

Transformer availability Separate item
Transformer mounting Remote


Transformer type Electronic, Electronic dimmable, Electronic dimmable

I-10V, Electronic dimmable dali

Emergency Without Insulation class III

## **PHYSICAL**

Recessed depth (mm) 149
Construction material Aluminium
Weight (kg) 2,35

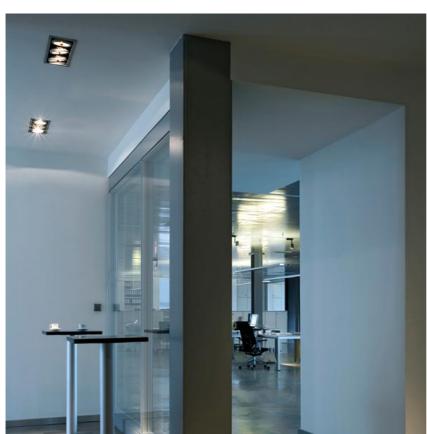





**Battery Trim Small 4L Square** designed by F.A. Porsche

Embedded luminaire with multiple optic bodies for LED light source. Power supply not included. Requires one power supply for each optic body.

04.6485.20A - 4×1312lm Matt white
04.6485.08A - 4×1312lm Mercury
04.6485.14A - 4×1312lm Matt black





## **CERTIFICATIONS**


















Flos.architectural@flos.com www.flos.com



## **Battery Trim Small 4L Square. Accessories**

## **Optical**









08.8495.14

08.8503.64.OD

08.8503.65.OD

**SKY BLUE FILTER** 

## **Battery Trim Small 4L Square** designed by F.A. Porsche

## Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium

## **BLUE FILTER**

Colored filters in 3 mm dichroic material

Colored filters in 3 mm


dichroic material

Embedded luminaire with multiple optic bodies for LED light source. Power supply not included. Requires one power supply for each optic body.





















## 08.8503.67.OD


**RED FILTER** 

## 08.8503.69 **HOT LIGHT**

## **AMBER FILTER**

Colored filters in 3 mm Colored filters in 3 mm dichroic material dichroic material

Colored filters in 3 mm dichroic material







## **CERTIFICATIONS**



40°









**COLD LIGHT** 

## 08.8503.DL

## 08.8503.ND

# $\langle III \rangle$

ΙP 20


## Colored filters in 3 mm

Colored filters in 3 mm

**DAYLIGHT** 

**NEODIMIUM** 

Colored filters in 3 mm dichroic material



dichroic material dichroic material

Flos.architectural@flos.com www.flos.com



## **Battery Trim Small 4L Square. Accessories**

#### **Power Supply**









60.8534

## **Constant Current Power** Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15



## **Constant Current Power** Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA I-10V switch or push dimming.

Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15



## **Constant Current Power** Supply for LED. 25-50W

Continuous current power supply of 25-50W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/550/650/700/750/850/900/1050mA Dali switch, 1-10V purch or supply disposable processing the disposable process. switch or push dimming.

Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15





## **Battery Trim Small 4L Square** designed by F.A. Porsche

Embedded luminaire with multiple optic bodies for LED light source. Power supply not included. Requires one power supply for each optic body.

04.6485.20A - 4x1312lm Matt white 04.6485.08A - 4x1312lm Mercury

04.6485.14A - 4x1312lm Matt black









#### **Continuous current** power supply of I3-42W

Continuous current power supply of 13-42W, 220/240V - 50/60Hz with power current selected through adjustable 300/ 350/400/450/500/550/600/650/700/ 750/800/850/900/950/1000/1050

Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15

## **CERTIFICATIONS**


















Flos.architectural@flos.com

www.flos.com



## **Battery Trim Small 4L Square** . Lamps



**LED Array** 

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array





**Battery Trim Small 4L Square** designed by F.A. Porsche

Embedded luminaire with multiple optic bodies for LED light source. Power supply not included. Requires one power supply for each optic body.

04.6485.20A - 4x1312lm Matt white 04.6485.08A - 4x1312lm Mercury

04.6485.14A - 4x1312lm Matt black





## **CERTIFICATIONS**















