

BATTERY NO TRIM SMALL 4L SQUARE

Number of heads 4

Mounting Ceiling recessed

Lamps description 4 x LED Array DC 700 mA 20W 2290 lm 3000K CRI 80

Luminaire luminous flux Extreme Cut-off. See reference number

Environment Indoor

Notes Pre-installation frame must be ordered separately

OPTICAL

Reflector finish Aluminum
Aiming Adjustable
Light distribution symmetry Symmetric
Beam angle 29° Flood

ELECTRICAL

Transformer availability Separate item
Transformer mounting Remote


Transformer type Electronic, Electronic dimmable, Electronic dimmable

I-10V, Electronic dimmable dali

EmergencyWithoutInsulation classClass III

PHYSICAL

Recessed depth (mm) 146
Construction material Aluminium
Weight (kg) 2,92

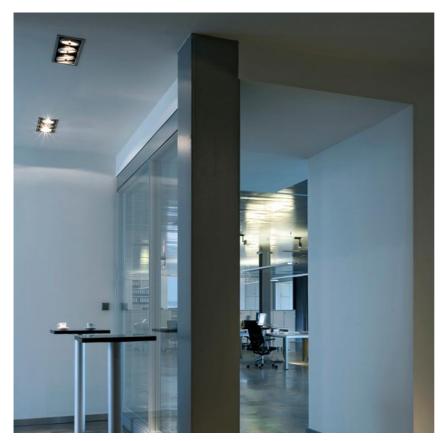




Battery No Trim Small 4L Square designed by F.A. Porsche

Embedded luminaire with multiple optic bodies for LED light source. Power supply not included. Requires one power supply for each optic body.





- ** Inaccessible ceiling
- * Accessible ceiling: modular/open

CERTIFICATIONS


















Flos.architectural@flos.com www.flos.com



Battery No Trim Small 4L Square. Accessories

Optical









08.8495.14

08.8503.64.OD

08.8503.65.OD

SKY BLUE FILTER

designed by F.A. Porsche

Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets

BLUE FILTER

Colored filters in 3 mm dichroic material

Colored filters in 3 mm dichroic material

Embedded luminaire with multiple optic bodies for LED light source. Power supply not included. Requires one power supply for each optic body.

04.6485.14ANT - 4x1312lm Black












08.8503.67.OD





AMBER FILTER

Colored filters in 3 mm dichroic material

RED FILTER

Colored filters in 3 mm dichroic material

HOT LIGHT

08.8503.69

Colored filters in 3 mm dichroic material

** Inaccessible ceiling

Accessible ceiling: modular/open





CERTIFICATIONS



40°



(III)



ΙP

20



08.8503.CL

COLD LIGHT

Colored filters in 3 mm dichroic material

08.8503.DL


DAYLIGHT

Colored filters in 3 mm dichroic material

08.8503.ND

NEODIMIUM

Colored filters in 3 mm dichroic material



Flos.architectural@flos.com www.flos.com



Battery No Trim Small 4L Square. Accessories

Power Supply









60.8534

Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15



Constant Current Power Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA I-10V switch or push dimming.

Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15



Constant Current Power Supply for LED. 25-50W

Continuous current power supply of 25-50W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/550/650/700/750/850/900/1050mA Dali switch, 1-10V purch current dispersion of the continuous current power supplies and continuous current dispersion of the continuous current dispersion of switch or push dimming.

Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15



Battery No Trim Small 4L Square designed by F.A. Porsche

Embedded luminaire with multiple optic bodies for LED light source. Power supply not included. Requires one power supply for each optic body.



04.6485.14ANT - 4x1312lm Black






Continuous current power supply of I3-42W

Continuous current power supply of 13-42W, 220/240V - 50/60Hz with power current selected through adjustable 300/ 350/400/450/500/550/600/650/700/ 750/800/850/900/950/1000/1050

Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15



- ** Inaccessible ceiling
- Accessible ceiling: modular/open

CERTIFICATIONS


















Flos.architectural@flos.com www.flos.com



Battery No Trim Small 4L Square. Accessories

Mounting





Pre-installation frame

Pre-installation frame small 4 lights

Battery No Trim Small 4L Square . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:


LED Array



Battery No Trim Small 4L Square designed by F.A. Porsche

Embedded luminaire with multiple optic bodies for LED light source. Power supply not included. Requires one power supply for each optic body.





CERTIFICATIONS


















Flos.architectural@flos.com www.flos.com

^{**} Inaccessible ceiling * Accessible ceiling: modular/open