

BATTERY TRIM SMALL 4L SQUARE

Number of heads

Mounting Ceiling recessed

Lamps description 4 x LED Array DC 700 mA 20W 2290 lm 3000K CRI 80

Luminaire luminous flux Extreme Cut-off. See reference number

Environment Indoor

OPTICAL

Reflector finish Aluminum
Aiming Adjustable
Light distribution symmetry Symmetric
Beam angle 44° Wide Flood

ELECTRICAL

Transformer availability Separate item
Transformer mounting Remote


Transformer type Electronic, Electronic dimmable, Electronic dimmable

I-10V, Electronic dimmable dali

Emergency Without Insulation class Class III

PHYSICAL

Recessed depth (mm) 149
Construction material Aluminium
Weight (kg) 2,35

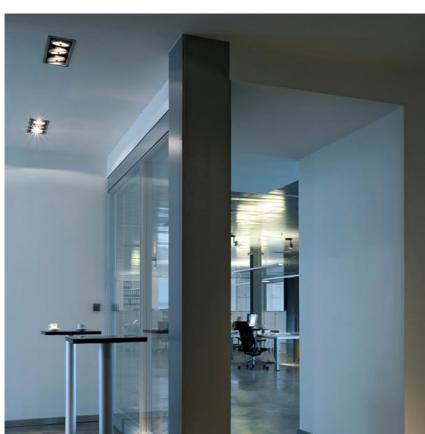





Battery Trim Small 4L Square designed by F.A. Porsche

Embedded luminaire with multiple optic bodies for LED light source. Power supply not included. Requires one power supply for each optic body.

04.6486.20A - 4x1222lm Matt white
04.6486.08A - 4x1222lm Mercury
04.6486.14A - 4x1222lm Matt black





CERTIFICATIONS















Flos.architectural@flos.com www.flos.com



Battery Trim Small 4L Square. Accessories

Optical









08.8495.14

08.8503.64.OD

08.8503.65.OD

SKY BLUE FILTER

Battery Trim Small 4L Square designed by F.A. Porsche

Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium

BLUE FILTER

Colored filters in 3 mm Colored filters in 3 mm dichroic material dichroic material

Embedded luminaire with multiple optic bodies for LED light source. Power supply not included. Requires one power supply for each optic body.








04.6486.20A - 4x1222lm Matt white 04.6486.08A - 4x1222Im Mercury 04.6486.14A - 4x1222lm Matt black









08.8503.66.OD

08.8503.67.OD

RED FILTER

HOT LIGHT

08.8503.69

235

235

AMBER FILTER

Colored filters in 3 mm dichroic material

Colored filters in 3 mm dichroic material

Colored filters in 3 mm dichroic material

CERTIFICATIONS



40°



(III)



ΙP

20









COLD LIGHT

DAYLIGHT

08.8503.DL

08.8503.ND **NEODIMIUM**

Colored filters in 3 mm dichroic material

08.8503.CL

Colored filters in 3 mm dichroic material

dichroic material

Colored filters in 3 mm

Flos.architectural@flos.com www.flos.com



Battery Trim Small 4L Square. Accessories

Power Supply









Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15



Constant Current Power Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA 1-10V switch or push dimming.

Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15



Constant Current Power Supply for LED. 25-50W

Continuous current power supply of 25-50W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/550/650/700/750/850/900/1050mA Dali switch, I-10V switch or push dimming.

Maximum lenght of 1.5 mm2 secundary conductor (m): 10


Maximum lenght of 2.5 mm2 secundary conductor (m): 15




Battery Trim Small 4L Square designed by F.A. Porsche

Embedded luminaire with multiple optic bodies for LED light source. Power supply not included. Requires one power supply for each optic body.

04.6486.20A - 4x1222lm Matt white 04.6486.08A - 4x1222lm Mercury 04.6486.14A - 4x1222lm Matt black







60.9073

Continuous current power supply of 13-42W

Continuous current power supply of 13-42W, 220/240V - 50/60Hz with power current selected through adjustable 300/ 350/400/450/500/550/600/650/700/750/800/850/900/950/1000/1050 mA.

Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15

CERTIFICATIONS















Flos.architectural@flos.com www.flos.com



Battery Trim Small 4L Square. Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array





Battery Trim Small 4L Square designed by F.A. Porsche

Embedded luminaire with multiple optic bodies for LED light source. Power supply not included. Requires one power supply for each optic body.

04.6486.20A - 4x1222lm Matt white 04.6486.08A - 4x1222lm Mercury

04.6486.14A - 4x1222lm Matt black





CERTIFICATIONS













IP 20

Flos.architectural@flos.com www.flos.com