

## BOX

|                   |                 |
|-------------------|-----------------|
| Number of heads   | 1               |
| Mounting          | Wall recessed   |
| Lamps description | TC-DEL G24q 26W |
| Voltage (V)       | 220/240         |
| Environment       | Indoor, Outdoor |

## OPTICAL

|                              |                |
|------------------------------|----------------|
| Light controller description | Glass diffuser |
| Aiming                       | Fixed          |
| Beam angle                   | 65°            |

## ELECTRICAL

|                           |            |
|---------------------------|------------|
| Control gear availability | Included   |
| Control gear type         | Electronic |
| Control gear mounting     | Integral   |
| Emergency                 | Without    |
| Insulation class          | Class II   |

## PHYSICAL


|                       |                   |
|-----------------------|-------------------|
| Width (mm)            | 236               |
| Height (mm)           | 256               |
| Recessed depth (mm)   | 52                |
| Construction material | Die-cast aluminum |
| Weight (kg)           | 1,95              |





**Box**  
designed by Piero Lissoni

Recessed guide light for indoor and outdoor applications. Electronic control gear integrated.

|                          |                |
|--------------------------|----------------|
| ● 07.9001.01.E3 - 1800lm | Matt white     |
| ● 07.9001.72.E3 - 1800lm | Grey           |
| ● 07.9001.04.E3 - 1800lm | Matt black     |
| ● 07.9001.MM.E3 - 1800lm | Metallic brown |

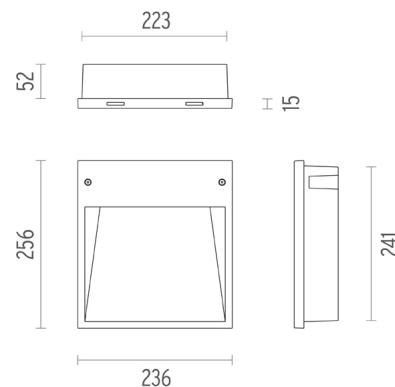

## CERTIFICATIONS

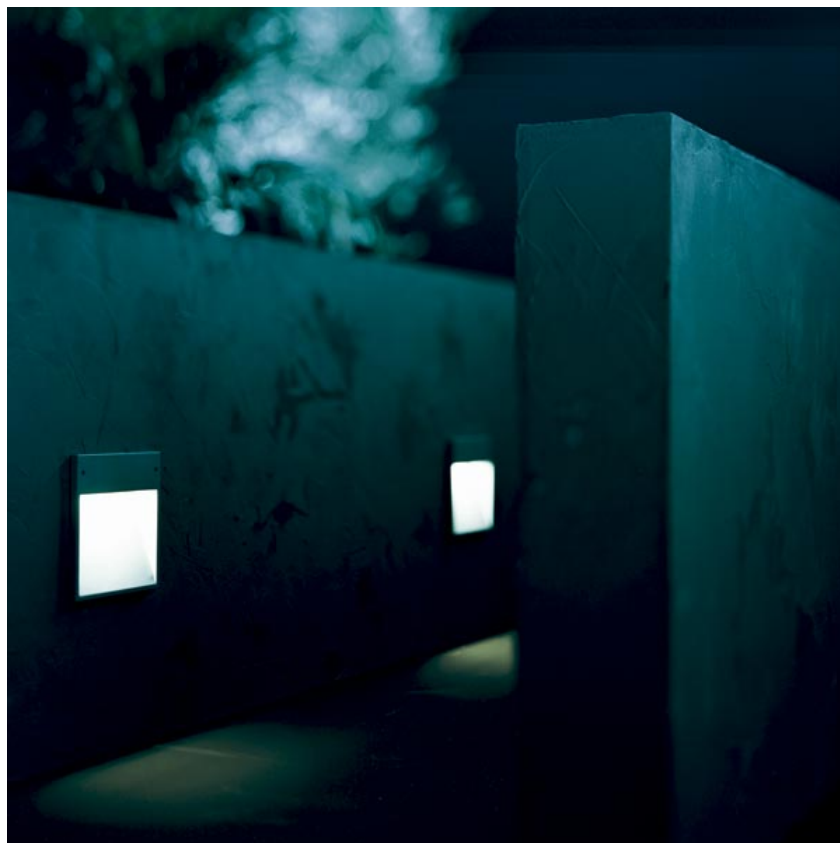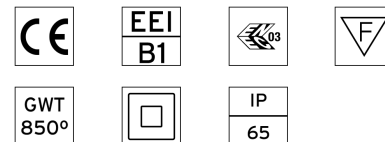

## Box . Accessories

### Mounting



80.1318

#### High density polystyrene (225x55x244mm)

High density polystyrene matched die for installation on cement



08.8256.00

#### Flush wall Installation

Accessory for flush wall installation for BOX.



### Box

designed by Piero Lissoni

Recessed guide light for indoor and outdoor applications. Electronic control gear integrated.

- 07.9001.01.E3 - 1800lm Matt white
- 07.9001.72.E3 - 1800lm Grey
- 07.9001.04.E3 - 1800lm Matt black
- 07.9001.MM.E3 - 1800lm Metallic brown


### Electrical



08.8012.00

#### Junction box


IP67 junction box: to be used for the power connection

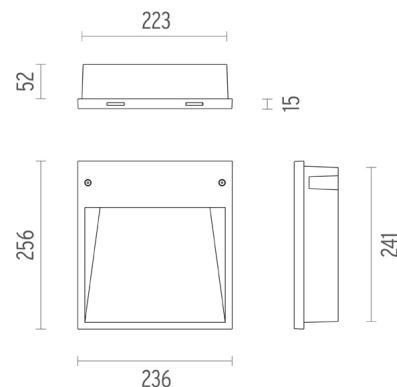

### CERTIFICATIONS



## Box . Lamps



60.6214

**TC-DEL**

**Lamp Watt:**  
26 W

**Lamp category:**  
Compact fluorescent

**Socket:**  
G24q-3

**Color temperature (K):**  
2700 °K

**Catalog reference:**  
60.6214

**Lamp type:**  
TC-DEL



60.6258

**TC-DEL**

**Lamp Watt:**  
26 W

**Lamp category:**  
Compact fluorescent

**Socket:**  
G24q-3

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6258

**Lamp type:**  
TC-DEL



60.6259

**TC-DEL**

**Lamp Watt:**  
26 W

**Lamp category:**  
Compact fluorescent

**Socket:**  
G24q-3

**Color temperature (K):**  
4000 °K

**Catalog reference:**  
60.6259

**Lamp type:**  
TC-DEL




**Box**

designed by Piero Lissoni

Recessed guide light for indoor and outdoor applications. Electronic control gear integrated.

- 07.9001.01.E3 - 1800lm Matt white
- 07.9001.72.E3 - 1800lm Grey
- 07.9001.04.E3 - 1800lm Matt black
- 07.9001.MM.E3 - 1800lm Metallic brown

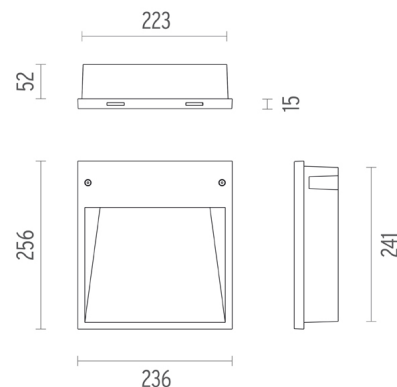

## CERTIFICATIONS

