

MINI BOX

Number of heads	1
Mounting	Wall recessed
Lamps description	Power LED 1,6W 110 lm 3000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor, Outdoor

OPTICAL


Light controller description	Diffuser glass
Aiming	Fixed
Beam angle	52°

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class II

PHYSICAL

Width (mm)	100
Height (mm)	100
Recessed depth (mm)	85
Construction material	Die-cast aluminum
Weight (kg)	0,36

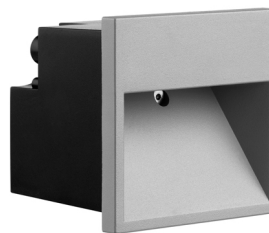


Mini Box

designed by Piero Lissoni

Semi-embedded signalling lamp for indoor or outdoor use. 220-240V, 50-60Hz non-regulable power supply included.

07.9006.01B - 73lm	Matt white
07.9006.72B - 73lm	Grey
07.9006.04B - 73lm	Matt black
07.9006.MMB - 73lm	Metallic brown

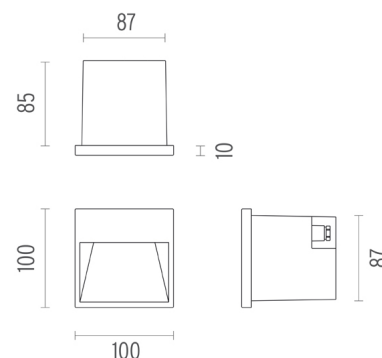

CERTIFICATIONS



Mini Box . Accessories

Mounting



80.1332

High density polystyrene (87x85x87mm)

High density polystyrene matched die for installation on cement



08.8246.00

Flush wall Installation

Accessory for flush wall installation for MINI BOX.



Mini Box

designed by Piero Lissoni

Semi-embedded signalling lamp for indoor or outdoor use. 220-240V, 50-60Hz non-regulable power supply included.

	07.9006.01B - 73lm	Matt white
	07.9006.72B - 73lm	Grey
	07.9006.04B - 73lm	Matt black
	07.9006.MMB - 73lm	Metallic brown


Electrical



08.8012.00

Junction box

IP67 junction box: to be used for the power connection

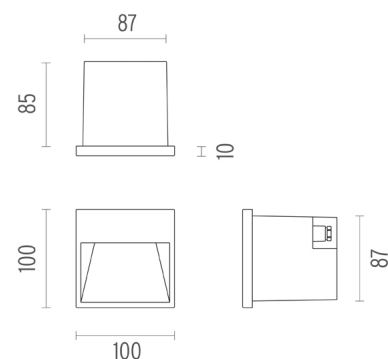

CERTIFICATIONS



Mini Box . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED




Mini Box

designed by Piero Lissoni

Semi-embedded signalling lamp for indoor or outdoor use. 220-240V, 50-60Hz non-regulable power supply included.

07.9006.01B - 73lm	Matt white
07.9006.72B - 73lm	Grey
07.9006.04B - 73lm	Matt black
07.9006.MMB - 73lm	Metallic brown

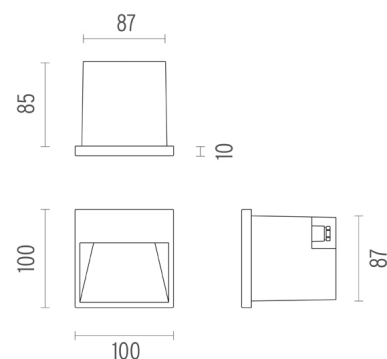

CERTIFICATIONS

