

THIN LED 1034 MM

Number of heads	1
Mounting	Wall surface
Lamps description	Top LED 18,8W 1778 lm 3000K CRI 85
Luminaire luminous flux	See reference number
Voltage (V)	24
Environment	Indoor
Notes	42 LEDs



OPTICAL




Aiming	Fixed
Beam angle	43°

Thin LED 1034 mm designed by FLOS Architectural

Wall application luminaire for indirect lighting with LED. Remote transformer not included.


ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class III


	09.0100.30A - 1724lm	White
	09.0100.29A - 1724lm	Anodised aluminium
	09.0100.BZA - 1724lm	Bronze

PHYSICAL

Length (mm)	1034
Construction material	Aluminium
Weight (kg)	0,90/m

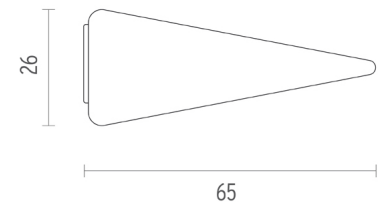

CERTIFICATIONS

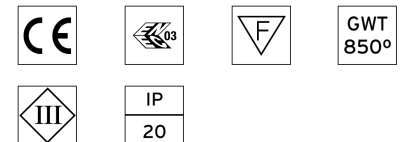

Thin LED 1034 mm . Accessories

Power Supply



60.8495

Electronic transformer with constant voltage (24V) for LED. 20W

Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum length of 1.5 mm² secondary conductor (m): 5



60.8496

Electronic transformer with constant voltage (24V) for LED. 60W

Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum length of 1.5 mm² secondary conductor (m): 5



60.8497

Electronic transformer with constant voltage (24V) for LED. 100W

Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum length of 1.5 mm² secondary conductor (m): 5

Maximum length of 2.5 mm² secondary conductor (m): 10



Thin LED 1034 mm
designed by FLOS Architectural

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

- 09.0100.30A - 1724lm White
- 09.0100.29A - 1724lm Anodised aluminium
- 09.0100.BZA - 1724lm Bronze

Electrical



60.8640

Dimmable I-10V Control Unit


Dimmable I-10V control unit with 1 channel for 24V LED modules. Power supply not included. Max. 120 W - 5A.




60.8635

Dimmable Dali control unit with 1 channel for 24V LED modules

Power supply not included.

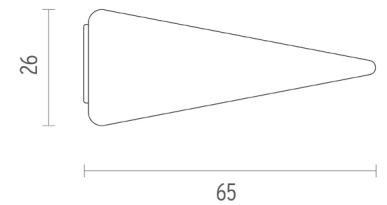

CERTIFICATIONS

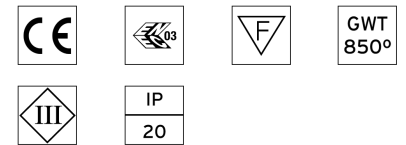

Thin LED 1034 mm . Lamps



Top LED

Lamp category:

LED

Socket:

Special base

Lamp type:




Top LED




Thin LED 1034 mm

designed by FLOS Architectural

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

-
- | | | |
|---|----------------------|--------------------|
|  | 09.0100.30A - 1724lm | White |
|  | 09.0100.29A - 1724lm | Anodised aluminium |
|  | 09.0100.BZA - 1724lm | Bronze |
-

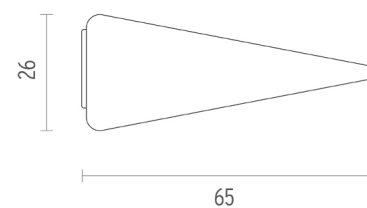

CERTIFICATIONS

