

## THIN LED 2040 MM

Number of heads	I
Mounting	Wall surface
Lamps description	Top LED 34W 3509 lm 3000K CRI 85
Luminaire luminous flux	See reference number
Voltage (V)	24
Environment	Indoor
Notes	84 LEDs

### OPTICAL

Aiming	Fixed
Beam angle	43°

### ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class III

### PHYSICAL


Length (mm)	2040
Construction material	Aluminium
Weight (kg)	0,90/m



### Thin LED 2040 mm designed by FLOS Architectural

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

09.0101.30A - 3449lm	White
09.0101.29A - 3449lm	Anodised aluminium
09.0101.BZA - 3449lm	Bronze

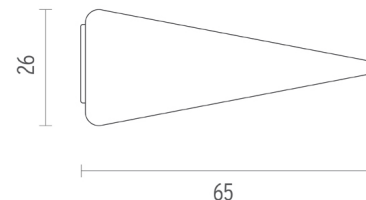

### CERTIFICATIONS



## Thin LED 2040 mm . Accessories

### Power Supply



60.8495

#### Electronic transformer with constant voltage (24V) for LED. 20W

Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum lenght of 1.5 mm2 secondary conductor (m): 5



60.8496

#### Electronic transformer with constant voltage (24V) for LED. 60W

Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum lenght of 1.5 mm2 secondary conductor (m): 5



60.8497

#### Electronic transformer with constant voltage (24V) for LED. 100W

Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum lenght of 1.5 mm2 secondary conductor (m): 5

Maximum lenght of 2.5 mm2 secondary conductor (m): 10



### Thin LED 2040 mm designed by FLOS Architectural

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

09.0101.30A - 3449lm	White
09.0101.29A - 3449lm	Anodised aluminium
09.0101.BZA - 3449lm	Bronze

### Electrical



60.8640

#### Dimmable I-10V Control Unit


Dimmable I-10V control unit with 1 channel for 24V LED modules. Power supply not included. Max. 120 W - 5A.



60.8635

#### Dimmable Dali control unit with 1 channel for 24V LED modules

Power supply not included.

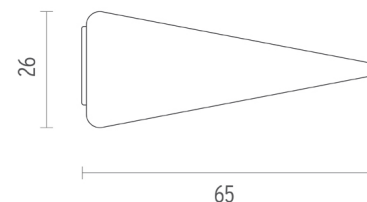

### CERTIFICATIONS



## Thin LED 2040 mm . Lamps



### Top LED

#### Lamp category:

LED

#### Socket:

Special base

#### Lamp type:

Top LED




### Thin LED 2040 mm

designed by FLOS Architectural

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

09.0101.30A - 3449lm	White
09.0101.29A - 3449lm	Anodised aluminium
09.0101.BZA - 3449lm	Bronze

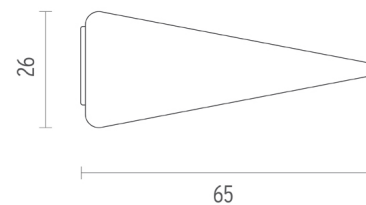

### CERTIFICATIONS

