

FLOS

THIN LED 2541 MM

Number of heads	1
Mounting	Wall surface
Lamps description	Top LED 41W 4371 lm 3000K CRI 85
Luminaire luminous flux	See reference number
Voltage (V)	24
Environment	Indoor
Notes	105 LEDs

OPTICAL

Aiming	Fixed
Beam angle	43°

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class III

PHYSICAL


Length (mm)	2541
Construction material	Aluminium
Weight (kg)	0,90/m




Thin LED 2541 mm designed by FLOS Architectural

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

● 09.0102.30A - 431 lIm	White
● 09.0102.29A - 431 lIm	Anodised aluminium
● 09.0102.BZA - 431 lIm	Bronze

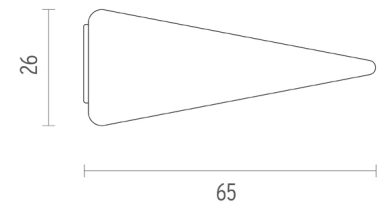

CERTIFICATIONS

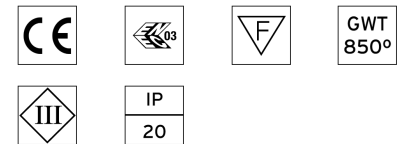

Thin LED 2541 mm . Accessories

Power Supply



60.8495

Electronic transformer with constant voltage (24V) for LED. 20W

Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum length of 1.5 mm² secondary conductor (m): 5



60.8496

Electronic transformer with constant voltage (24V) for LED. 60W

Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum length of 1.5 mm² secondary conductor (m): 5



60.8497

Electronic transformer with constant voltage (24V) for LED. 100W

Electronic transformer with constant voltage (24V) for LED. 100/240V.

Maximum length of 1.5 mm² secondary conductor (m): 5

Maximum length of 2.5 mm² secondary conductor (m): 10



Thin LED 2541 mm
designed by FLOS Architectural

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

- 09.0102.30A - 431 lIm White
- 09.0102.29A - 431 lIm Anodised aluminium
- 09.0102.BZA - 431 lIm Bronze

Electrical



60.8640

Dimmable I-10V Control Unit


Dimmable I-10V control unit with 1 channel for 24V LED modules. Power supply not included. Max. 120 W - 5A.




60.8635

Dimmable Dali control unit with 1 channel for 24V LED modules

Power supply not included.

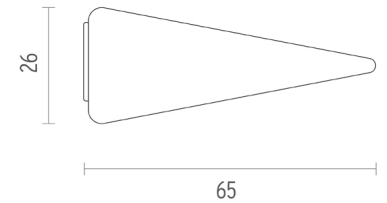

CERTIFICATIONS

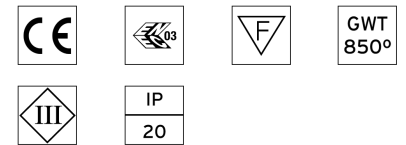

Thin LED 2541 mm . Lamps



Top LED

Lamp category:

LED

Socket:

Special base

Lamp type:




Top LED




Thin LED 2541 mm

designed by FLOS Architectural

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

-
- | | | |
|---|-----------------------|--------------------|
|  | 09.0102.30A - 431 lIm | White |
|  | 09.0102.29A - 431 lIm | Anodised aluminium |
|  | 09.0102.BZA - 431 lIm | Bronze |
-

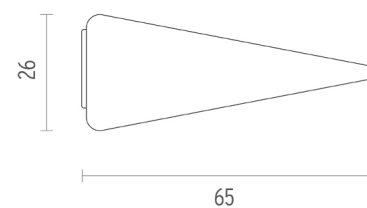

CERTIFICATIONS

