

## SPOT MODULE QR-III

<b>Number of heads</b>	1
<b>Mounting</b>	Track mounting
<b>Lamps description</b>	QR-III G53 Max 100W or LED QR-III G53
<b>Voltage (V)</b>	12
<b>Environment</b>	Indoor
<b>Notes</b>	Only for Perimetral or Channel 140 installation.

### OPTICAL

<b>Aiming</b>	Adjustable
<b>Beam angle</b>	24°, 25°, 36°, 45°, 6°, 8°

### ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic
<b>Emergency</b>	Without
<b>Insulation class</b>	Class III

### PHYSICAL


<b>Spot diameter (mm)</b>	115
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	0,44




**Spot Module QR-III**  
designed by FLOS Architectural

Projector to be installed in Light Cut Mini system. Electronic transformer remote not included.

● 09.0205.30	White
● 09.0205.14	Black

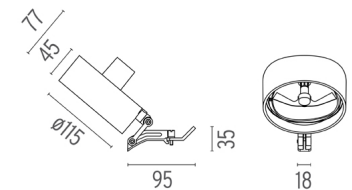

### CERTIFICATIONS



## Spot Module QR-III . Accessories


### Optical



08.8020.68

#### Elliptical light distribution lens


Elliptical light distribution lens in 4 mm thick tempered glass.



● 08.8019.64.OD

#### Blue filter


Colored filters in 3 mm thick dichroic material



● 08.8019.65.OD

#### Sky blue filter


Colored filters in 3 mm thick dichroic material



● 08.8019.66.OD

#### Amber filter

Colored filters in 3 mm thick dichroic material



● 08.8019.67.OD

#### Red filter

Colored filters in 3 mm thick dichroic material



08.8019.98.OD

#### U.V. filter


U.V. filter



08.8023.68

#### I.R. filter


I.R. filter



08.8019.69

#### Hot Light

Hot Light



08.8019.CL

#### Cold light filter

Cold light filter




#### Spot Module QR-III


designed by FLOS Architectural

Projector to be installed in Light Cut Mini system. Electronic transformer remote not included.


● 09.0205.30 White  
● 09.0205.14 Black

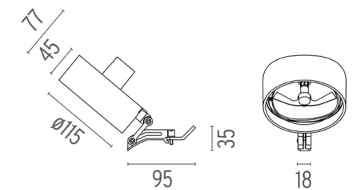

#### CERTIFICATIONS

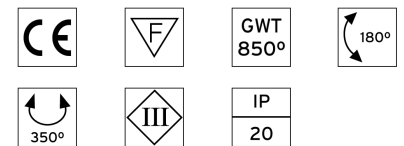


## Spot Module QR-III . Accessories



08.8019.DL

### Daylight filter

Daylight filter



08.8019.ND

### Neodymium

Neodymium



08.8178.68

### Flood lens

Flood lens made in press glass.



### Spot Module QR-III designed by FLOS Architectural

Projector to be installed in Light Cut Mini system. Electronic transformer remote not included.

- 09.0205.30 White
- 09.0205.14 Black



08.8364.30

08.8364.14

### Filter-holder


Filter-holder made from injected aluminium.




08.8365.14

### Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



### CERTIFICATIONS



## Spot Module QR-III . Lamps



60.6398

**QR-III**

**Lamp Watt:**  
35 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
G53

**Lamp angle:**  
24 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6398

**Lamp type:**  
QR-III



60.6374

**QR-III**

**Lamp Watt:**  
50 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
G53

**Lamp angle:**  
24 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6374

**Lamp type:**  
QR-III



60.6375

**QR-III**

**Lamp Watt:**  
75 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
G53

**Lamp angle:**  
8 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6375


**Lamp type:**  
QR-III



**Spot Module QR-III**  
designed by FLOS Architectural

Projector to be installed in Light Cut Mini system. Electronic transformer remote not included.

● 09.0205.30 White  
● 09.0205.14 Black

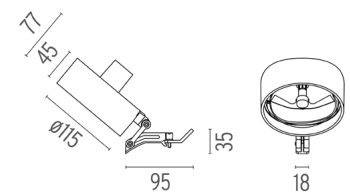

60.6376

**QR-III**

**Lamp Watt:**  
75 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
G53

**Lamp angle:**  
24 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6376

**Lamp type:**  
QR-III



60.6862

**QR-III**

**Lamp Watt:**  
30 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
G53

**Lamp angle:**  
8 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6862

**Lamp type:**  
QR-III



60.6861

**QR-III**

**Lamp Watt:**  
45 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
G53

**Lamp angle:**  
45 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6861

**Lamp type:**  
QR-III

### CERTIFICATIONS



## Spot Module QR-III . Lamps



60.6863

**QR-III**

**Lamp Watt:**

60 W

**Lamp category:**

Halogen low voltage

**Socket:**

G53

**Lamp angle:**

8°

**Color temperature (K):**

3000 °K

**Catalog reference:**

60.6863

**Lamp type:**

QR-III



60.6864

**QR-III**

**Lamp Watt:**

60 W

**Lamp category:**

Halogen low voltage

**Socket:**

G53

**Lamp angle:**

24°

**Color temperature (K):**

3000 °K

**Catalog reference:**

60.6864

**Lamp type:**

QR-III



60.6450 IRC

**QR-III**

**Lamp Watt:**

50 W

**Lamp category:**

Halogen low voltage

**Socket:**

G53

**Lamp angle:**

24°

**Color temperature (K):**

3000 °K

**Catalog reference:**

60.6450 IRC

**Lamp type:**

QR-III



### Spot Module QR-III

designed by FLOS Architectural


Projector to be installed in Light Cut Mini system. Electronic transformer remote not included.

● 09.0205.30

White

● 09.0205.14

Black



60.6452 IRC

**QR-III**

**Lamp Watt:**

35 W

**Lamp category:**

Halogen low voltage

**Socket:**

G53

**Lamp angle:**

24°

**Color temperature (K):**

3000 °K

**Catalog reference:**

60.6452 IRC

**Lamp type:**

QR-III



60.6454 IRC

**QR-III**

**Lamp Watt:**

65 W

**Lamp category:**

Halogen low voltage

**Socket:**

G53

**Lamp angle:**

24°

**Color temperature (K):**

3000 °K

**Catalog reference:**

60.6454 IRC

**Lamp type:**

QR-III



60.6455 IRC

**QR-III**

**Lamp Watt:**

65 W

**Lamp category:**

Halogen low voltage

**Socket:**

G53

**Lamp angle:**

8°

**Color temperature (K):**

3000 °K

**Catalog reference:**

60.6455 IRC

**Lamp type:**

QR-III

### CERTIFICATIONS



## Spot Module QR-III . Lamps



60.6456 IRC

**QR-III**

**Lamp Watt:**  
45 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
G53

**Lamp angle:**  
45 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6456 IRC

**Lamp type:**  
QR-III



60.6458 IRC

**QR-III**

**Lamp Watt:**  
45 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
G53

**Lamp angle:**  
24 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6458 IRC

**Lamp type:**  
QR-III



60.6575 IRC

**QR-III**

**Lamp Watt:**  
65 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
G53

**Lamp angle:**  
45 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6575 IRC


**Lamp type:**  
QR-III



**Spot Module QR-III**  
designed by FLOS Architectural

Projector to be installed in Light Cut Mini system. Electronic transformer remote not included.

● 09.0205.30 White  
● 09.0205.14 Black

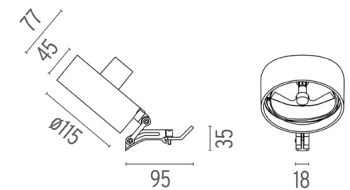

60.6962

**LED QR-III**

**Lamp Watt:**  
12 W

**Lamp category:**  
LED

**Socket:**  
G53

**Lamp angle:**  
24 °

**Color temperature (K):**  
2800 °K

**Catalog reference:**  
60.6962

**Lamp type:**  
LED QR-III



60.6989

**QR-III**

**Lamp Watt:**  
50 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
G53

**Lamp angle:**  
6 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6989

**Lamp type:**  
QR-III

### CERTIFICATIONS

