

SPOT MODULE POWER LED

Number of heads	1
Mounting	Track mounting
Lamps description	Power LED DC 900 mA 10W 840 lm 3000K CRI 80
Luminaire luminous flux	See reference number
Environment	Indoor

OPTICAL


Aiming	Adjustable
Beam angle	13° Spot

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class III

PHYSICAL


Spot diameter (mm)	57
Construction material	Aluminium
Weight (kg)	1,20

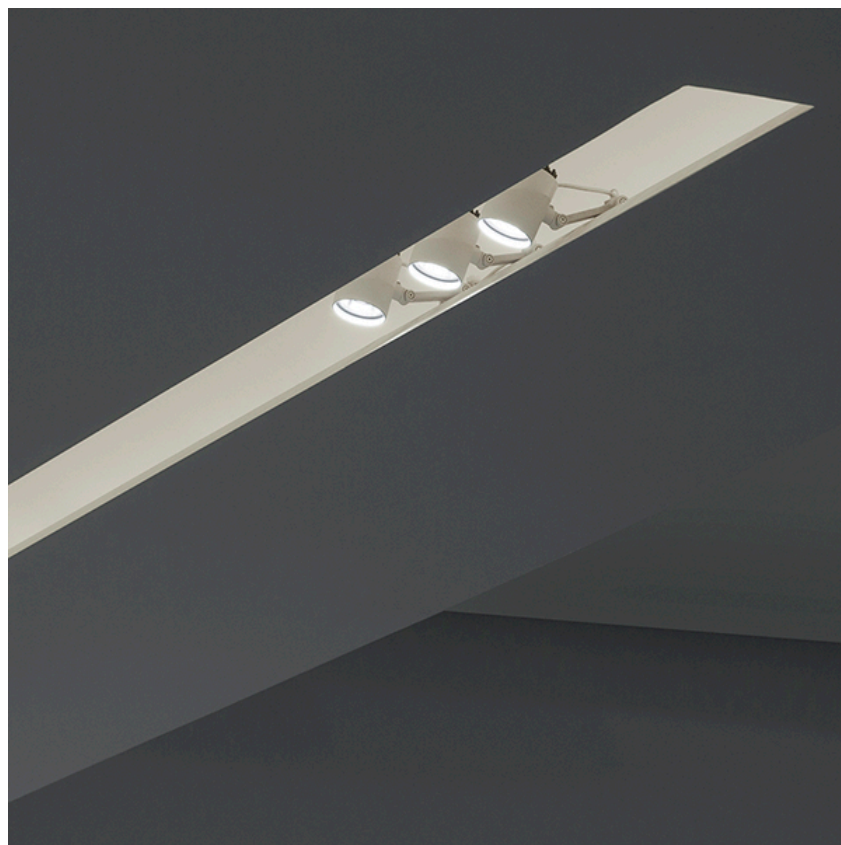


Spot Module Power LED
designed by FLOS Architectural

Projector to be installed in Light Cut Mini system. Remote continuous current supply source not included.

09.0220.30A - 647lm	White
09.0220.14A - 647lm	Black



CERTIFICATIONS

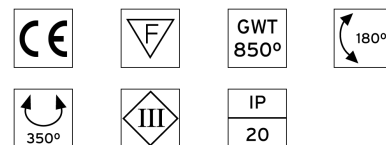

Spot Module Power LED . Accessories

Optical



● 08.8182.14

Honeycomb

"Honeycomb" anti-glare grid made of aluminium cells.



● 08.8380.30

● 08.8380.14

Screening cylinder




● 08.8363.30

● 08.8363.14

Filter-holder

Filter-holder made from injected aluminium.



● 08.8230.64.OD

Blue Filter


Colored filters in 3 mm dichroic material



● 08.8230.65.OD

Sky Blue Filter

Colored filters in 3 mm dichroic material



● 08.8230.66.OD

Amber Filter

Colored filters in 3 mm dichroic material




Spot Module Power LED

designed by FLOS Architectural

Projector to be installed in Light Cut Mini system. Remote continuous current supply source not included.


● 09.0220.30A - 647lm	White
● 09.0220.14A - 647lm	Black




CERTIFICATIONS



Spot Module Power LED . Accessories



 08.8230.67.OD

Red Filter

Colored filters in 3 mm dichroic material



08.8230.98.OD

U.V. Filter


Colored filters in 3 mm dichroic material



08.8230.69

Hot Light


Colored filters in 3 mm dichroic material



08.8230.CL

Cold Light

Colored filters in 3 mm dichroic material



08.8230.DL

Daylight

Colored filters in 3 mm dichroic material



08.8230.ND



Neodimium


Colored filters in 3 mm dichroic material



Spot Module Power LED designed by FLOS Architectural

Projector to be installed in Light Cut Mini system. Remote continuous current supply source not included.

	09.0220.30A - 647lm	White
	09.0220.14A - 647lm	Black



CERTIFICATIONS



Spot Module Power LED . Accessories

Power Supply



60.8530

Constant Current Power Supply for LED. 25-50W

Continuous current power supply of 25-50W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/550/650/700/750/850/900/1050mA Dali switch, 1-10V switch or push dimming.

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15

60.9233

Constant Current Power Supply for LED 32W

Non dimmable continuous current power supply of 32W, with power current selected through adjustable 350/500/550/700/850/900 mA switch.

Maximum length of 1.5 mm² secondary conductor (m): 20

Maximum length of 2.5 mm² secondary conductor (m): 50




Spot Module Power LED designed by FLOS Architectural


Projector to be installed in Light Cut Mini system. Remote continuous current supply source not included.

- 09.0220.30A - 647lm White
- 09.0220.14A - 647lm Black

Spot Module Power LED . Lamps



CERTIFICATIONS

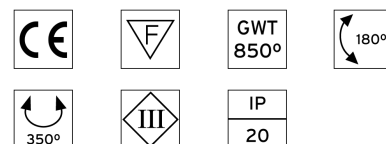

Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED