

SPOT MODULE PHOSPHOR LED

Number of heads	1
Mounting	Track mounting
Lamps description	Phosphor LED DC 650 mA 18W 1870 lm 3000K CRI 80
Luminaire luminous flux	See reference number
Environment	Indoor
Notes	Only for Channel I40 installation.

OPTICAL


Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	23° Medium

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class III

PHYSICAL


Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,20

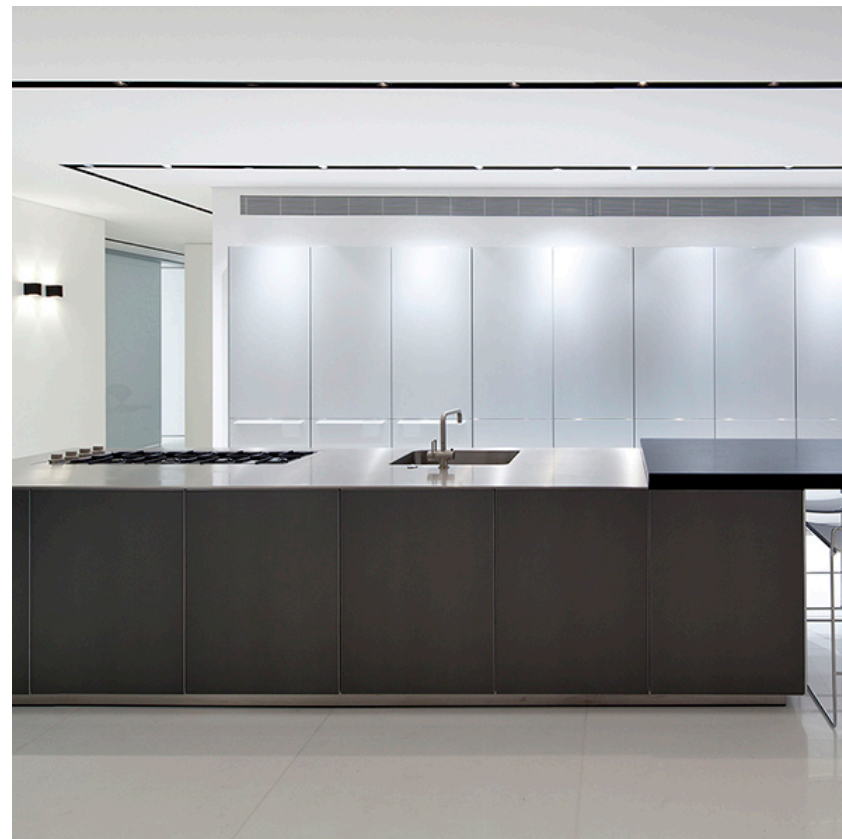


Spot Module Phosphor LED designed by FLOS Architectural

Projector to be installed in Light Cut Mini system. Remote continuous current supply source not included.

● 09.0230.30 - 1242lm	White
● 09.0230.14 - 1242lm	Black



CERTIFICATIONS

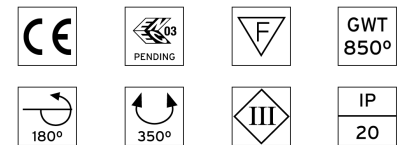

Spot Module Phosphor LED . Accessories

Power Supply



60.8530

Constant Current Power Supply for LED. 25-50W

Continuous current power supply of 25-50W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/550/650/700/750/850/900/1050mA Dali switch, 1-10V switch or push dimming.

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15

60.8697

Constant Current Power Supply for LED. 11/32W

Remote multicurrent electronic driver for LED. 11/32W, 250-1000 mA, 220/240V, 50/60Hz.

Maximum length of 1.5 mm² secondary conductor (m): 20


Maximum length of 2.5 mm² secondary conductor (m): 50



Spot Module Phosphor LED designed by FLOS Architectural

Projector to be installed in Light Cut Mini system. Remote continuous current supply source not included.

- 09.0230.30 - 1242lm White
- 09.0230.14 - 1242lm Black



Spot Module Phosphor LED . Lamps



Phosphor LED

Lamp category:

LED

Lamp type:

Phosphor LED

CERTIFICATIONS

