

## SPOT MODULE PHOSPHOR LED

<b>Number of heads</b>	1
<b>Mounting</b>	Track mounting
<b>Lamps description</b>	Phosphor LED DC 700 mA 17W 1400 lm 3000K CRI 98
<b>Luminaire luminous flux</b>	See reference number
<b>Environment</b>	Indoor
<b>Notes</b>	Only for Channel 140 installation.

### OPTICAL


<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	23° Medium

### ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic
<b>Emergency</b>	Without
<b>Insulation class</b>	Class III

### PHYSICAL


<b>Spot diameter (mm)</b>	86
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	1,20

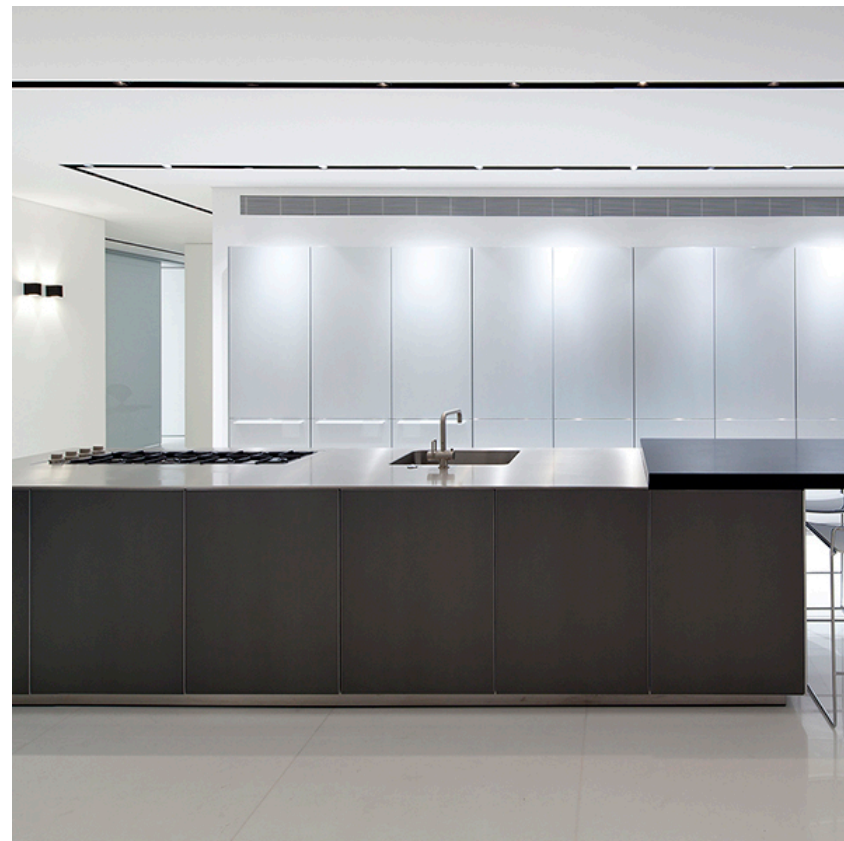


### Spot Module Phosphor LED designed by FLOS Architectural

Projector to be installed in Light Cut Mini system. Remote continuous current supply source not included.

● 09.0232.30 - 964lm	White
● 09.0232.14 - 964lm	Black



### CERTIFICATIONS

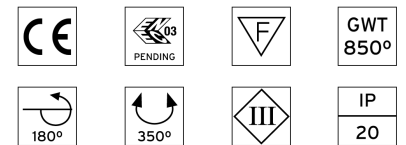

## Spot Module Phosphor LED . Accessories

### Power Supply



60.8534

#### Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



60.8533

#### Constant Current Power Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA 1-10V switch or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



60.8530

#### Constant Current Power Supply for LED. 25-50W

Continuous current power supply of 25-50W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/550/650/700/750/850/900/1050mA Dali switch, 1-10V switch or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10


Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



### Spot Module Phosphor LED designed by FLOS Architectural

Projector to be installed in Light Cut Mini system. Remote continuous current supply source not included.

- 09.0232.30 - 964lm White
- 09.0232.14 - 964lm Black



60.8656

#### Constant Current Power Supply for LED. 17/24/32W

Continuous current power supply of 17/24/32W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA.


Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 20

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 50

### CERTIFICATIONS



## Spot Module Phosphor LED . Lamps



### Phosphor LED

**Lamp category:**  
LED


**Lamp type:**  
Phosphor LED



### Spot Module Phosphor LED designed by FLOS Architectural

Projector to be installed in Light Cut Mini system. Remote continuous current supply source not included.

- 09.0232.30 - 964lm      White
- 09.0232.14 - 964lm      Black



### CERTIFICATIONS

