

SPOT MODULE PHOSPHOR LED

Number of heads	1
Mounting	Track mounting
Lamps description	Phosphor LED DC 700 mA 17W 1400 lm 3000K CRI 98
Luminaire luminous flux	See reference number
Environment	Indoor
Notes	Only for Channel 140 installation.

OPTICAL


Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	45° Flood

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class III

PHYSICAL


Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,20

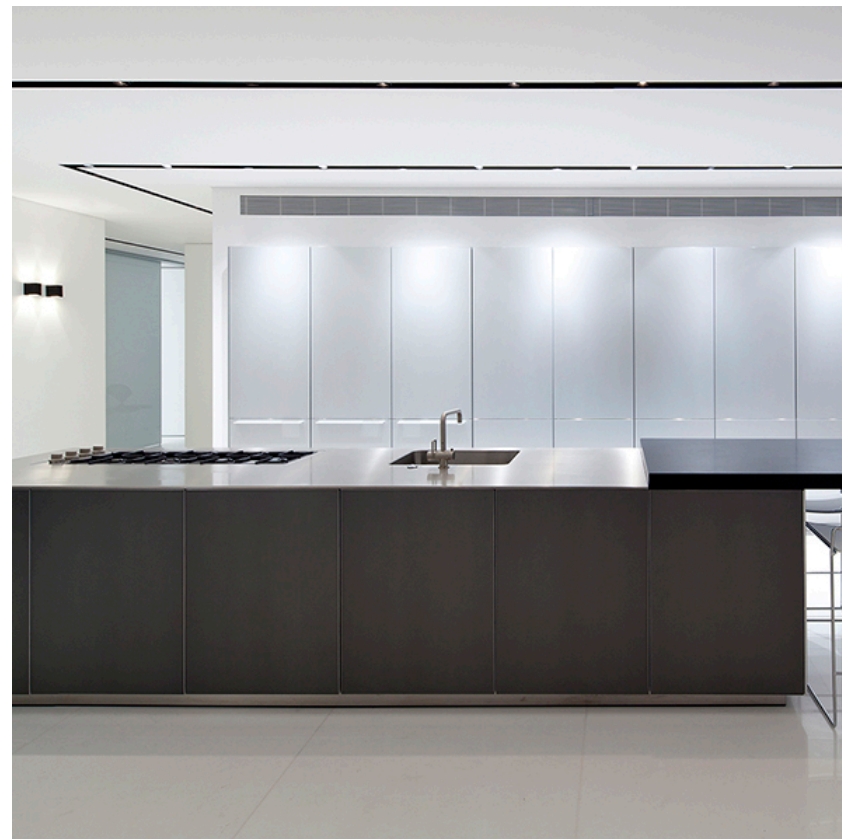


Spot Module Phosphor LED designed by FLOS Architectural

Projector to be installed in Light Cut Mini system. Remote continuous current supply source not included.

● 09.0233.30 - 1035lm	White
● 09.0233.14 - 1035lm	Black



CERTIFICATIONS

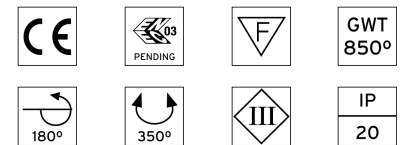

Spot Module Phosphor LED . Accessories

Power Supply



60.8534

Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15



60.8533

Constant Current Power Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA 1-10V switch or push dimming.

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15



60.8530

Constant Current Power Supply for LED. 25-50W

Continuous current power supply of 25-50W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/550/650/700/750/850/900/1050mA Dali switch, 1-10V switch or push dimming.

Maximum length of 1.5 mm² secondary conductor (m): 10


Maximum length of 2.5 mm² secondary conductor (m): 15



Spot Module Phosphor LED designed by FLOS Architectural

Projector to be installed in Light Cut Mini system. Remote continuous current supply source not included.

- 09.0233.30 - 1035lm White
- 09.0233.14 - 1035lm Black



60.8656

Constant Current Power Supply for LED. 17/24/32W

Continuous current power supply of 17/24/32W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA.

Maximum length of 1.5 mm² secondary conductor (m): 20

Maximum length of 2.5 mm² secondary conductor (m): 50

CERTIFICATIONS



Spot Module Phosphor LED . Lamps



Phosphor LED

Lamp category:
LED


Lamp type:
Phosphor LED



Spot Module Phosphor LED designed by FLOS Architectural

Projector to be installed in Light Cut
Mini system. Remote continuous
current supply source not included.

-
- | | |
|-----------------------|-------|
| ● 09.0233.30 - 1035lm | White |
| ● 09.0233.14 - 1035lm | Black |
-



CERTIFICATIONS

