FLOS

PURE 1 SPOT TRACK

Number of heads	1
Mounting	Track mounting
Lamps description	QR-CBC 51 GX5.3 Max 50W or LED QR-CBC 51 GX5.3 7/10W
Voltage (V)	220/240
Environment	Indoor

OPTICAL

Light controller description	Bare lamps
Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	10°, 24°, 25°, 36°, 38°, 60°

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class I

PHYSICAL

Width (mm)	180
Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,20

Pure 1 Spot Track
designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer integrated 220/240V – 12V, 50/60Hz. Dimmerable from 10% to 100% of full output using built-in potentiometer

09.1000.30	White
09.1000.02	Grey
09.1000.14	Black



CERTIFICATIONS

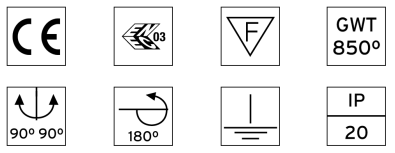

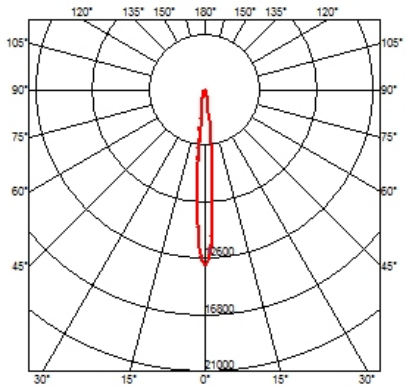

FLOS

Pure I Spot Track . Accessories

Optical

08.8166.14

Holding ring

08.8163.68

Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass.

08.8169.14

Honeycomb

"Honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.



08.8160.64.OD

Blue filter

Blue filter



08.8160.65.OD

Sky blue filter

Sky blue filter



08.8160.66.OD

Amber filter

Amber filter



08.8160.67.OD

Red filter

Red filter

08.8160.98.OD

U.V. filter

U.V. filter

08.8160.68

I.R. filter

I.R. filter

Pure I Spot Track
designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer integrated 220/240V – 12V, 50/60Hz. Dimmerable from 10% to 100% of full output using built-in potentiometer

09.1000.30	White
09.1000.02	Grey
09.1000.14	Black



CERTIFICATIONS

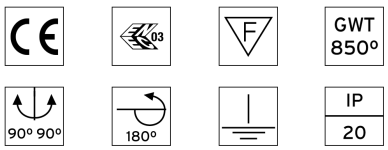

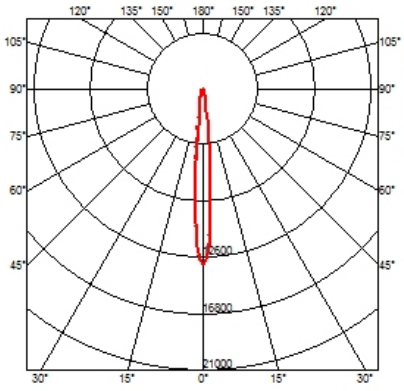

FLOS

Pure I Spot Track . Accessories

08.8160.69

Hot Light

Hot Light



08.8160.CL

Cold light filter

Cold light filter



08.8160.DL

Daylight filter

Daylight filter

Pure I Spot Track
designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer integrated 220/240V – 12V, 50/60Hz. Dimmerable from 10% to 100% of full output using built-in potentiometer

08.8160.ND

Neodimium

08.8175.68

Flood lens

Flood lens made in press glass.

08.8232.30
08.8232.02
08.8232.14

Pure I Pro external ring accessory

Pure I Pro external ring accessory. Only for halogen and halide lamps, consult for LED version

09.1000.30	White
09.1000.02	Grey
09.1000.14	Black



CERTIFICATIONS

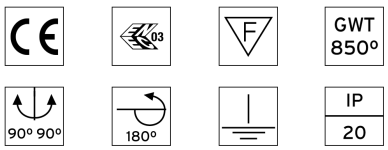

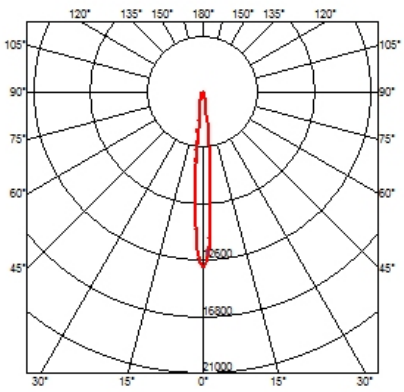

FLOS

Pure I Spot Track . Lamps

60.6392

QR-CBC 51

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
10 °

Color temperature (K):
3000 °K

Catalog reference:
60.6392

Lamp type:
QR-CBC 51

60.6359

QR-CBC 51

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6359

Lamp type:
QR-CBC 51

60.6360

QR-CBC 51

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
60.6360

Lamp type:
QR-CBC 51

60.6361

QR-CBC 51

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
60 °

Color temperature (K):
3000 °K

Catalog reference:
60.6361

Lamp type:
QR-CBC 51

60.6393

QR-CBC 51

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6393

Lamp type:
QR-CBC 51

60.6394

QR-CBC 51

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
60.6394

Lamp type:
QR-CBC 51

Pure I Spot Track
designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer integrated 220/240V – 12V, 50/60Hz. Dimmerable from 10% to 100% of full output using built-in potentiometer

09.1000.30	White
09.1000.02	Grey
09.1000.14	Black



CERTIFICATIONS

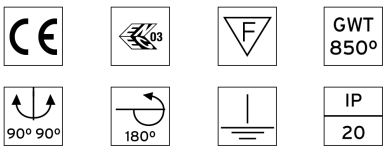

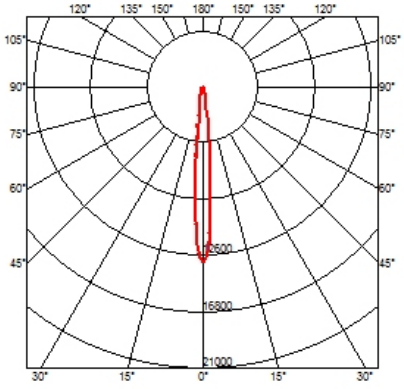

FLOS

Pure I Spot Track . Lamps

60.6395

QR-CBC 51

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
60 °

Color temperature (K):
3000 °K

Catalog reference:
60.6395

Lamp type:
QR-CBC 51

60.6355

QR-CBC 51

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6355

Lamp type:
QR-CBC 51

60.6356

QR-CBC 51

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
60.6356

Lamp type:
QR-CBC 51

60.6357

QR-CBC 51

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
60 °

Color temperature (K):
3000 °K

Catalog reference:
60.6357

Lamp type:
QR-CBC 51

BU19

QR-CBC 51

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
BU19

Lamp type:
QR-CBC 51

BU20

QR-CBC 51

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
BU20

Lamp type:
QR-CBC 51

Pure I Spot Track
designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer integrated 220/240V – 12V, 50/60Hz. Dimmerable from 10% to 100% of full output using built-in potentiometer

09.1000.30	White
09.1000.02	Grey
09.1000.14	Black



CERTIFICATIONS

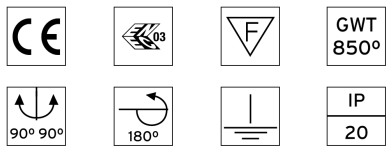

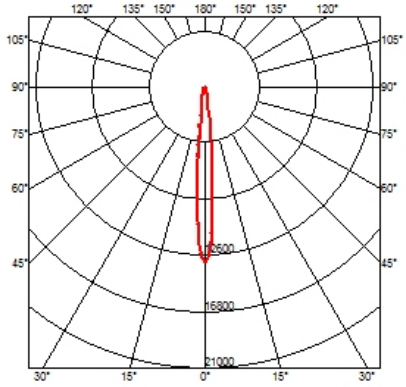

FLOS

Pure I Spot Track . Lamps

BU21

QR-CBC 51

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
60 °

Color temperature (K):
3000 °K

Catalog reference:
BU21

Lamp type:
QR-CBC 51

60.6891

LED QR-CBC 51

Lamp Watt:
8 W

Lamp category:
LED

Socket:
GX5.3

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6891

Lamp type:
LED QR-CBC 51

Pure I Spot Track
designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer integrated 220/240V – 12V, 50/60Hz. Dimmerable from 10% to 100% of full output using built-in potentiometer

09.1000.30	White
09.1000.02	Grey
09.1000.14	Black



CERTIFICATIONS