

PURE | SPOT TRACK

Number of heads	1
Mounting	Track mounting
Lamps description	HI PAR 51 GX10 35W
Voltage (V)	220/240
Environment	Indoor

OPTICAL

Light controller description	Bare lamp
Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	12° Spot, 25° Flood, 40° Wide Flood

ELECTRICAL

Control gear availability	Included
Control gear type	Electronic
Control gear mounting	Integral
Emergency	Without
Insulation class	Class I

PHYSICAL


Width (mm)	180
Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,20



Pure I Spot Track
designed by Knud Holscher


Spotlight to be installed on 3-phase track. Electronic control gear 220/240V, 50/60Hz integrated

● 09.1002.30	White
● 09.1002.02	Grey
● 09.1002.14	Black



CERTIFICATIONS

CE	03	F	GWT 850°
90° 90°	180°	IP 20	

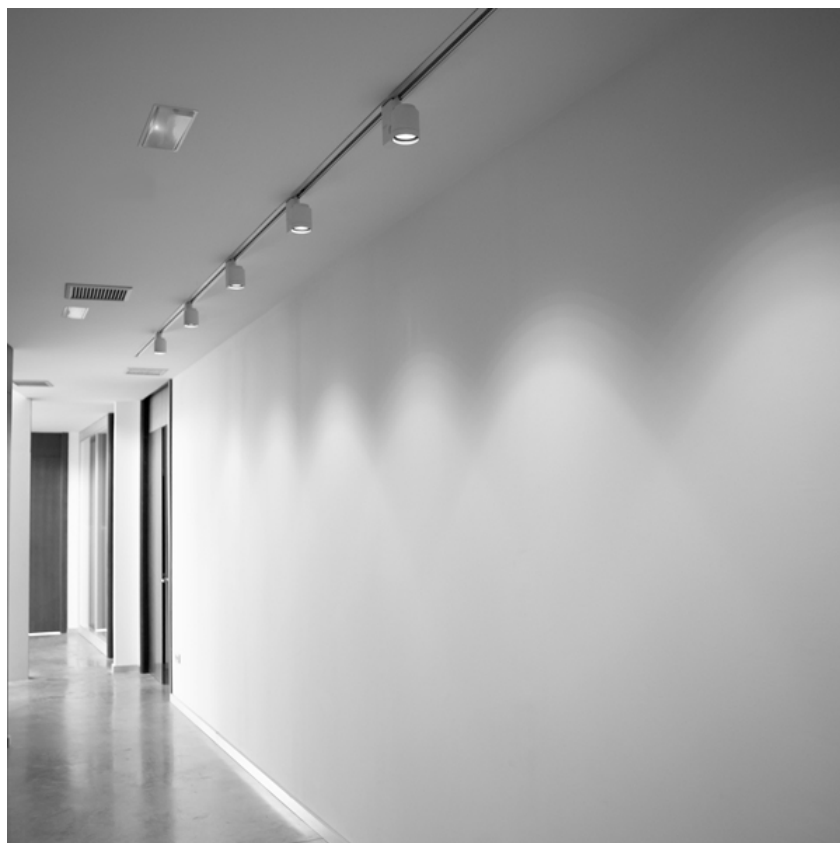

Pure I Spot Track . Accessories

Optical



08.8166.14

Holding ring



08.8163.68

Elliptical lens


Elliptical light distribution lens in 4 mm thick tempered glass.



08.8169.14

Honeycomb


"Honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.



08.8160.64.OD

Blue filter


Blue filter



08.8160.65.OD

Sky blue filter


Sky blue filter



08.8160.66.OD

Amber filter

Amber filter



08.8160.67.OD

Red filter

Red filter



08.8160.98.OD

U.V. filter

U.V. filter



08.8160.68

I.R. filter


I.R. filter




Pure I Spot Track designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic control gear 220/240V, 50/60Hz integrated

09.1002.30	White
09.1002.02	Grey
09.1002.14	Black



CERTIFICATIONS

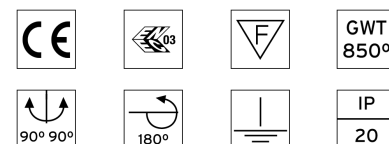


Pure I Spot Track . Accessories



08.8160.69

Hot Light


Hot Light



08.8160.CL

Cold light filter

Cold light filter



08.8160.DL

Daylight filter

Daylight filter



Pure I Spot Track designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic control gear 220/240V, 50/60Hz integrated

09.1002.30	White
09.1002.02	Grey
09.1002.14	Black



08.8160.ND

Neodimium



08.8175.68

Flood lens

Flood lens made in press glass.




08.8232.30

08.8232.02

08.8232.14

Pure I Pro external ring accessory

Pure I Pro external ring accessory. Only for halogen and halide lamps, consult for LED version



CERTIFICATIONS



Pure I Spot Track . Lamps



60.6637

HI PAR 51

Lamp Watt:
35 W

Lamp category:
Metal halide

Socket:
GX10

Lamp angle:
25 °

Color temperature (K):
3000 °K

Catalog reference:
60.6637

Lamp type:
HI PAR 51



60.6638

HI PAR 51

Lamp Watt:
35 W

Lamp category:
Metal halide

Socket:
GX10

Lamp angle:
40 °

Color temperature (K):
3000 °K

Catalog reference:
60.6638

Lamp type:
HI PAR 51



60.6636

HI PAR 51

Lamp Watt:
35 W

Lamp category:
Metal halide

Socket:
GX10

Lamp angle:
10 °

Color temperature (K):
3000 °K

Catalog reference:
60.6636


Lamp type:
HI PAR 51



Pure I Spot Track
designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic control gear 220/240V, 50/60Hz integrated

09.1002.30	White
09.1002.02	Grey
09.1002.14	Black



CERTIFICATIONS

