

PURE | SPOT PRO TRACK

Number of heads	1
Mounting	Track mounting
Lamps description	QR-CBC 5I GX5.3 Max 50W or LED QR-CBC 5I GX5.3 7/10W
Voltage (V)	220/240
Environment	Indoor

OPTICAL

Light controller description	Bare lamps
Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	10°, 24°, 25°, 36°, 38°, 60°

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable
Emergency	Without
Insulation class	Class I

PHYSICAL


Width (mm)	180
Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,40





Pure | Spot Pro Track
designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer integrated 220/240V – 12V, 50/60Hz. Dimmable from 10% to 100% of full output using built-in potentiometer

09.1070.30	White
09.1070.02	Grey
09.1070.14	Black



CERTIFICATIONS

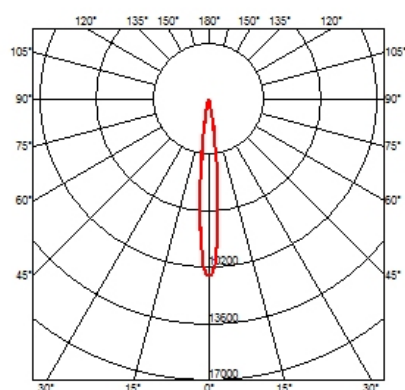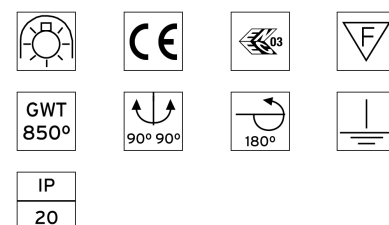

Pure I Spot Pro Track . Accessories


Optical



08.8163.68

Elliptical lens


Elliptical light distribution lens in 4 mm thick tempered glass.



08.8160.64.OD

Blue filter


Blue filter



08.8160.65.OD

Sky blue filter


Sky blue filter



08.8160.66.OD

Amber filter

Amber filter



08.8160.67.OD

Red filter

Red filter



08.8160.98.OD

U.V. filter

U.V. filter



08.8160.68

I.R. filter


I.R. filter



08.8160.69

Hot Light

Hot Light



08.8160.CL

Cold light filter


Cold light filter





Pure I Spot Pro Track designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer integrated 220/240V – 12V, 50/60Hz. Dimmable from 10% to 100% of full output using built-in potentiometer


09.1070.30	White
09.1070.02	Grey
09.1070.14	Black



CERTIFICATIONS

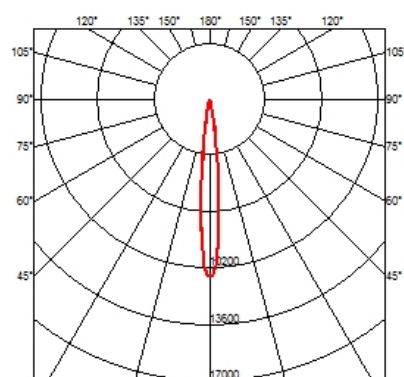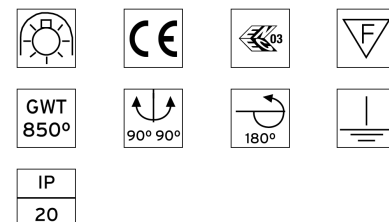

Pure I Spot Pro Track . Accessories



08.8160.DL

Daylight filter

Daylight filter



08.8160.ND

Neodimium



08.8175.68

Flood lens

Flood lens made in press glass.



08.8186.14

Honeycomb


Anti-glare grid in aluminium cells with black liquid paint finish.





Pure I Spot Pro Track designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer integrated 220/240V – 12V, 50/60Hz. Dimmerable from 10% to 100% of full output using built-in potentiometer

09.1070.30	White
09.1070.02	Grey
09.1070.14	Black



CERTIFICATIONS

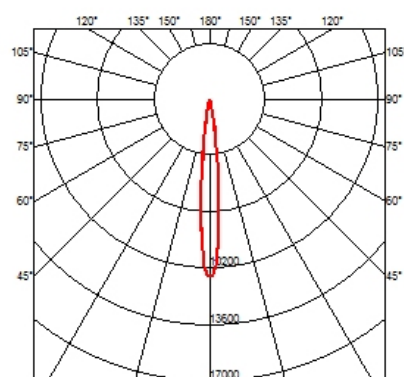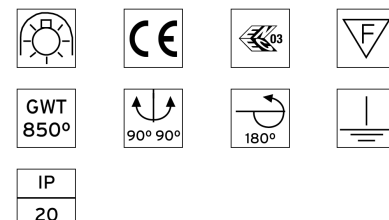

Pure | Spot Pro Track . Lamps



60.6392

QR-CBC 51

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
10 °

Color temperature (K):
3000 °K

Catalog reference:
60.6392

Lamp type:
QR-CBC 51



60.6359

QR-CBC 51

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6359

Lamp type:
QR-CBC 51



60.6360

QR-CBC 51

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
60.6360

Lamp type:
QR-CBC 51



60.6361

QR-CBC 51

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
60 °

Color temperature (K):
3000 °K

Catalog reference:
60.6361

Lamp type:
QR-CBC 51



60.6393

QR-CBC 51

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6393

Lamp type:
QR-CBC 51



60.6394

QR-CBC 51

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
60.6394


Lamp type:
QR-CBC 51




Pure | Spot Pro Track
designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer integrated 220/240V – 12V, 50/60Hz. Dimmable from 10% to 100% of full output using built-in potentiometer

09.1070.30	White
09.1070.02	Grey
09.1070.14	Black



CERTIFICATIONS

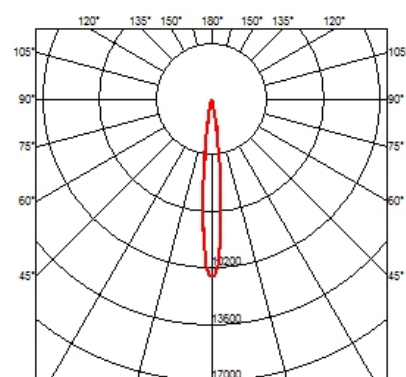

Pure | Spot Pro Track . Lamps



60.6395

QR-CBC 51

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
60 °

Color temperature (K):
3000 °K

Catalog reference:
60.6395

Lamp type:
QR-CBC 51



60.6355

QR-CBC 51

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6355

Lamp type:
QR-CBC 51



60.6356

QR-CBC 51

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
60.6356

Lamp type:
QR-CBC 51



60.6357

QR-CBC 51

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
60 °

Color temperature (K):
3000 °K

Catalog reference:
60.6357

Lamp type:
QR-CBC 51



BU19

QR-CBC 51

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
BU19

Lamp type:
QR-CBC 51



BU20

QR-CBC 51

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
BU20


Lamp type:
QR-CBC 51




Pure | Spot Pro Track
designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer integrated 220/240V – 12V, 50/60Hz. Dimmable from 10% to 100% of full output using built-in potentiometer

● 09.1070.30	White
● 09.1070.02	Grey
● 09.1070.14	Black



CERTIFICATIONS

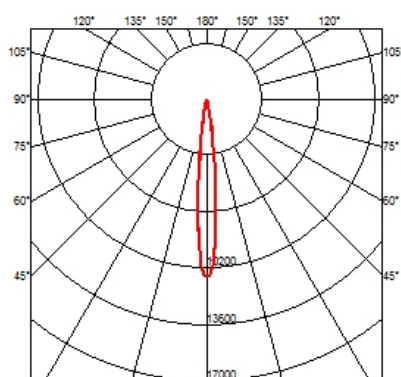

Pure | Spot Pro Track . Lamps



BU2I

QR-CBC 5I

Lamp Watt:

50 W

Lamp category:

Halogen low voltage

Socket:

GX5.3

Lamp angle:

60 °

Color temperature (K):

3000 °K

Catalog reference:

BU2I

Lamp type:

QR-CBC 5I



60.689I

LED QR-CBC 5I

Lamp Watt:

8 W

Lamp category:

LED

Socket:

GX5.3

Lamp angle:

24 °

Color temperature (K):

3000 °K

Catalog reference:

60.689I

Lamp type:


LED QR-CBC 5I



Pure | Spot Pro Track
designed by Knud Holscher

Spotlight to be installed on 3-phase track. Electronic transformer integrated 220/240V – 12V, 50/60Hz. Dimmerable from 10% to 100% of full output using built-in potentiometer

09.1070.30	White
09.1070.02	Grey
09.1070.14	Black



CERTIFICATIONS

