

PURE | SPOT CEILING

Number of heads	1
Mounting	Ceiling surface
Lamps description	HI PAR 51 GX10 20W
Voltage (V)	220/240
Environment	Indoor

OPTICAL

Light controller description	Bare lamp
Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	12° Spot, 25° Flood, 40° Wide Flood

ELECTRICAL

Control gear availability	Included
Control gear type	Electronic
Control gear mounting	Integral
Emergency	Without
Insulation class	Class I

PHYSICAL

Width (mm)	180
Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,20




Pure I Spot Ceiling


designed by Knud Holscher

Spotlight to be installed on ceiling/wall. Electronic control gear 220/240V, 50/60Hz integrated

● 09.1101.30	White
● 09.1101.02	Grey
● 09.1101.14	Black



CERTIFICATIONS

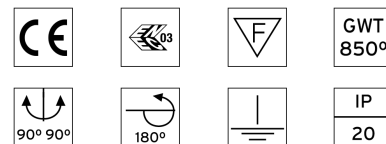

Pure I Spot Ceiling . Accessories

Optical



08.8166.14

Holding ring



08.8163.68

Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass.



08.8169.14

Honeycomb


"Honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.



Pure I Spot Ceiling designed by Knud Holscher

Spotlight to be installed on ceiling/wall. Electronic control gear 220/240V, 50/60Hz integrated


09.1101.30	White
09.1101.02	Grey
09.1101.14	Black



08.8160.64.OD

Blue filter


Blue filter



08.8160.65.OD

Sky blue filter



Sky blue filter



08.8160.66.OD

Amber filter

Amber filter



08.8160.67.OD

Red filter

Red filter



08.8160.98.OD

U.V. filter

U.V. filter



08.8160.68

I.R. filter

I.R. filter

CERTIFICATIONS




Pure I Spot Ceiling . Accessories



08.8160.69

Hot Light


Hot Light



08.8160.CL

Cold light filter

Cold light filter



08.8160.DL

Daylight filter

Daylight filter



Pure I Spot Ceiling designed by Knud Holscher

Spotlight to be installed on ceiling/
wall. Electronic control gear
220/240V, 50/60Hz integrated

09.1101.30	White
09.1101.02	Grey
09.1101.14	Black



08.8160.ND

Neodimium



08.8175.68

Flood lens

Flood lens made in press
glass.




08.8232.30

08.8232.02

08.8232.14

Pure I Pro external ring accessory

Pure I Pro external ring accessory.
Only for halogen and halide lamps,
consult for LED version



CERTIFICATIONS



Pure I Spot Ceiling . Lamps



60.6576

HI PAR 51

Lamp Watt:
20 W

Lamp category:
Metal halide

Socket:
GX10

Lamp angle:
10 °

Color temperature (K):
3000 °K

Catalog reference:
60.6576

Lamp type:
HI PAR 51



60.6577

HI PAR 51

Lamp Watt:
20 W

Lamp category:
Metal halide

Socket:
GX10

Lamp angle:
25 °

Color temperature (K):
3000 °K

Catalog reference:
60.6577

Lamp type:
HI PAR 51



60.6578

HI PAR 51

Lamp Watt:
20 W

Lamp category:
Metal halide

Socket:
GX10

Lamp angle:
40 °

Color temperature (K):
3000 °K

Catalog reference:
60.6578


Lamp type:
HI PAR 51



Pure I Spot Ceiling designed by Knud Holscher

Spotlight to be installed on ceiling/
wall. Electronic control gear
220/240V, 50/60Hz integrated

09.1101.30	White
09.1101.02	Grey
09.1101.14	Black



CERTIFICATIONS

