

PURE | SPOT PRO CEILING

Number of heads	1
Mounting	Ceiling surface
Lamps description	QR-CBC 5I GX5.3 Max 50W or LED QR-CBC 5I GX5.3 7/10W
Voltage (V)	220/240
Environment	Indoor



OPTICAL

Light controller description	Bare lamps
Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	10°, 24°, 25°, 36°, 38°, 60°

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable
Emergency	Without
Insulation class	Class I

Pure | Spot Pro Ceiling


designed by Knud Holscher

Spotlight to be installed on ceiling/wall. Electronic transformer integrated 220/240V – 12V, 50/60Hz. Dimmable from 10% to 100% of full output using built-in potentiometer



09.1170.30	White
09.1170.02	Grey
09.1170.14	Black

PHYSICAL

Width (mm)	180
Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,40



CERTIFICATIONS

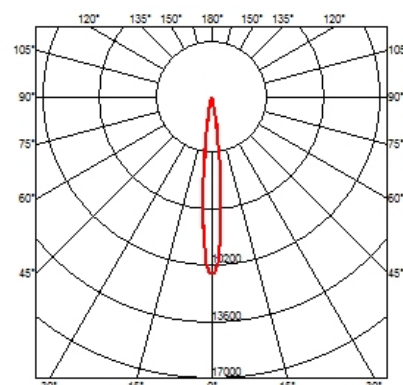

Pure I Spot Pro Ceiling . Accessories


Optical



08.8163.68

Elliptical lens


Elliptical light distribution lens in 4 mm thick tempered glass.



08.8160.64.OD

Blue filter

Blue filter



08.8160.65.OD


Sky blue filter

Sky blue filter



Pure I Spot Pro Ceiling designed by Knud Holscher


Spotlight to be installed on ceiling/wall. Electronic transformer integrated 220/240V – 12V, 50/60Hz. Dimmerable from 10% to 100% of full output using built-in potentiometer



08.8160.66.OD

Amber filter

Amber filter



08.8160.67.OD

Red filter

Red filter



08.8160.98.OD

U.V. filter

U.V. filter

09.1170.30	White
09.1170.02	Grey
09.1170.14	Black



08.8160.68

I.R. filter


I.R. filter



08.8160.69

Hot Light


Hot Light





08.8160.CL

Cold light filter


Cold light filter



CERTIFICATIONS

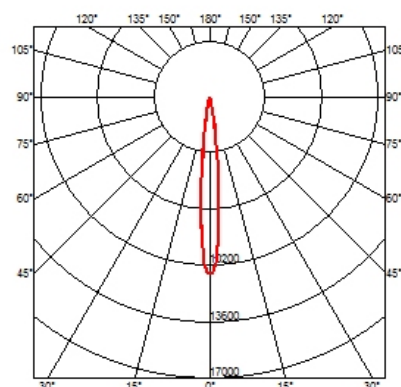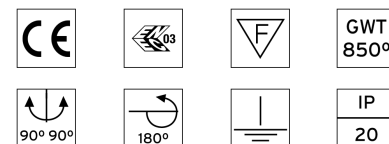

Pure I Spot Pro Ceiling . Accessories



08.8160.DL

Daylight filter

Daylight filter



08.8160.ND

Neodimium



08.8175.68

Flood lens

Flood lens made in press glass.



Pure I Spot Pro Ceiling

designed by Knud Holscher

Spotlight to be installed on ceiling/wall. Electronic transformer integrated 220/240V – 12V, 50/60Hz. Dimmerable from 10% to 100% of full output using built-in potentiometer




08.8186.14



Honeycomb

Anti-glare grid in aluminium cells with black liquid paint finish.

09.1170.30	White
09.1170.02	Grey
09.1170.14	Black



CERTIFICATIONS

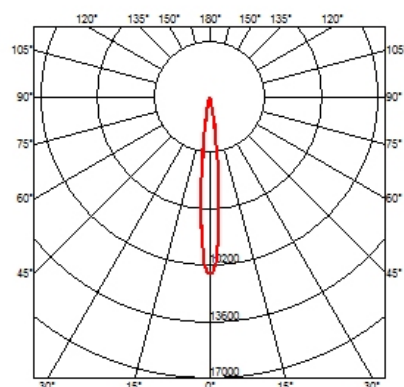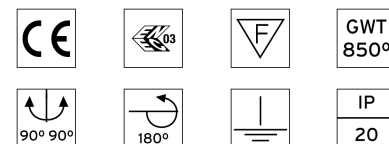

Pure | Spot Pro Ceiling . Lamps



60.6392

QR-CBC 5 I

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
10 °

Color temperature (K):
3000 °K

Catalog reference:
60.6392

Lamp type:
QR-CBC 5 I



60.6359

QR-CBC 5 I

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6359

Lamp type:
QR-CBC 5 I



60.6360

QR-CBC 5 I

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
60.6360


Lamp type:
QR-CBC 5 I



Pure | Spot Pro Ceiling
designed by Knud Holscher

Spotlight to be installed on ceiling/
wall. Electronic transformer
integrated 220/240V – 12V, 50/60Hz.
Dimmable from 10% to 100% of full
output using built-in potentiometer

09.1170.30	White
09.1170.02	Grey
09.1170.14	Black



60.6361

QR-CBC 5 I

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
60 °

Color temperature (K):
3000 °K

Catalog reference:
60.6361

Lamp type:
QR-CBC 5 I



60.6393

QR-CBC 5 I

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6393

Lamp type:
QR-CBC 5 I



60.6394

QR-CBC 5 I

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3



Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
60.6394

Lamp type:
QR-CBC 5 I

CERTIFICATIONS

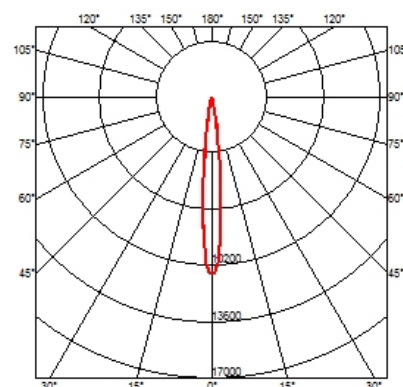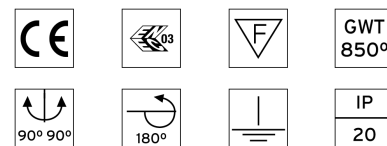

Pure | Spot Pro Ceiling . Lamps



60.6395

QR-CBC 51

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
60 °

Color temperature (K):
3000 °K

Catalog reference:
60.6395

Lamp type:
QR-CBC 51



60.6355

QR-CBC 51

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6355

Lamp type:
QR-CBC 51



60.6356

QR-CBC 51

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
60.6356


Lamp type:
QR-CBC 51



Pure | Spot Pro Ceiling
designed by Knud Holscher

Spotlight to be installed on ceiling/
wall. Electronic transformer
integrated 220/240V – 12V, 50/60Hz.
Dimmable from 10% to 100% of full
output using built-in potentiometer

09.1170.30	White
09.1170.02	Grey
09.1170.14	Black



60.6357

QR-CBC 51

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
60 °

Color temperature (K):
3000 °K

Catalog reference:
60.6357

Lamp type:
QR-CBC 51



BU19

QR-CBC 51

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
BU19

Lamp type:
QR-CBC 51



BU20

QR-CBC 51

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GX5.3



Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
BU20

Lamp type:
QR-CBC 51

CERTIFICATIONS

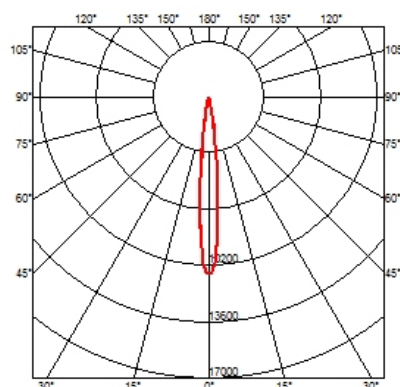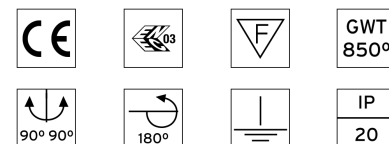

Pure | Spot Pro Ceiling . Lamps



BU2I

QR-CBC 5I

Lamp Watt:

50 W

Lamp category:

Halogen low voltage

Socket:

GX5.3

Lamp angle:

60 °

Color temperature (K):

3000 °K

Catalog reference:

BU2I

Lamp type:

QR-CBC 5I



60.689I

LED QR-CBC 5I

Lamp Watt:

8 W

Lamp category:

LED

Socket:

GX5.3

Lamp angle:

24 °

Color temperature (K):

3000 °K

Catalog reference:

60.689I

Lamp type:

LED QR-CBC 5I




Pure | Spot Pro Ceiling

designed by Knud Holscher

Spotlight to be installed on ceiling/ wall. Electronic transformer integrated 220/240V – 12V, 50/60Hz. Dimmable from 10% to 100% of full output using built-in potentiometer

09.1170.30	White
09.1170.02	Grey
09.1170.14	Black



CERTIFICATIONS

