

PURE I DOWNLIGHT

Number of heads	1
Mounting	Ceiling recessed
Lamps description	QR-70 BA15d Max 50W
Bezel diameter	142
Voltage (V)	12
Environment	Indoor
Notes	To be completed with installation frame. Available as accessory element. Must be ordered separately.

OPTICAL

Light controller description	Bare lamps
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	24° Flood, 8° Spot

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Emergency	Without
Insulation class	Class III

PHYSICAL


Cutout diameter (mm)	135
Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	0,96





Pure I Downlight
designed by Knud Holscher

12V halogen lamp recessed downlight.
Remote transformer not included

● 09.1605.30	White
● 09.1605.02	Grey
● 09.1605.14	Black

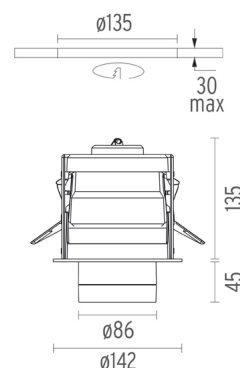

CERTIFICATIONS

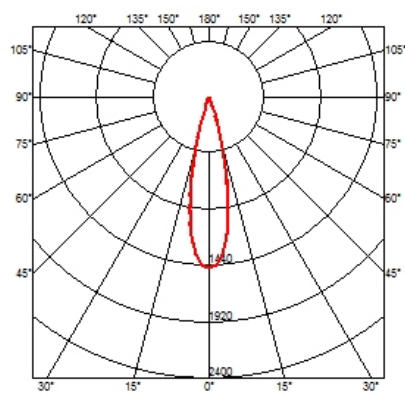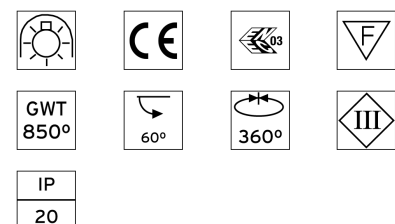

Pure I Downlight . Accessories

Optical



08.8166.14

Holding ring



08.8163.68

Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass.



08.8169.14

Honeycomb


"Honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.



Pure I Downlight designed by Knud Holscher

12V halogen lamp recessed downlight.
Remote transformer not included


09.1605.30	White
09.1605.02	Grey
09.1605.14	Black



08.8160.64.OD

Blue filter


Blue filter



08.8160.65.OD

Sky blue filter



Sky blue filter



08.8160.66.OD

Amber filter

Amber filter

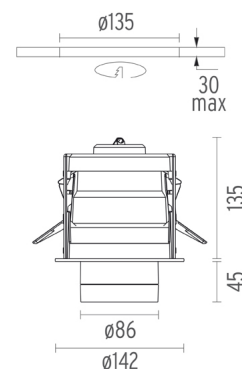

08.8160.67.OD

Red filter

Red filter



08.8160.98.OD

U.V. filter

U.V. filter





08.8160.68

I.R. filter

I.R. filter

CERTIFICATIONS

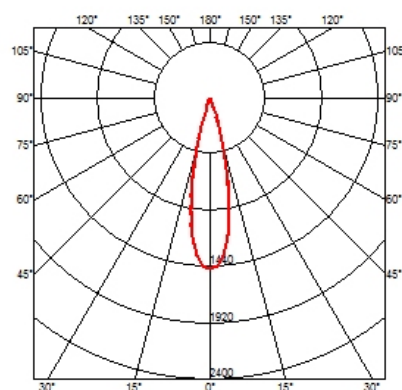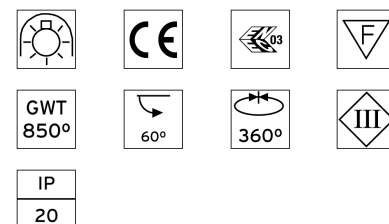


Pure I Downlight . Accessories



08.8160.69

Hot Light


Hot Light



08.8160.CL

Cold light filter

Cold light filter



08.8160.DL

Daylight filter

Daylight filter



08.8160.ND

Neodimium



08.8175.68

Flood lens

Flood lens made in press glass.



08.8232.30



08.8232.02



08.8232.14

Pure I Pro external ring accessory


Pure I Pro external ring accessory. Only for halogen and halide lamps, consult for LED version





Pure I Downlight designed by Knud Holscher

12V halogen lamp recessed downlight. Remote transformer not included

- 09.1605.30 White
- 09.1605.02 Grey
- 09.1605.14 Black

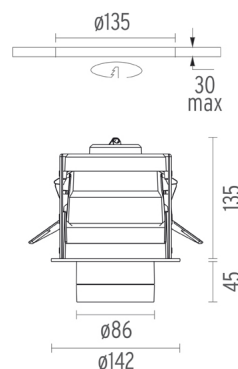

CERTIFICATIONS

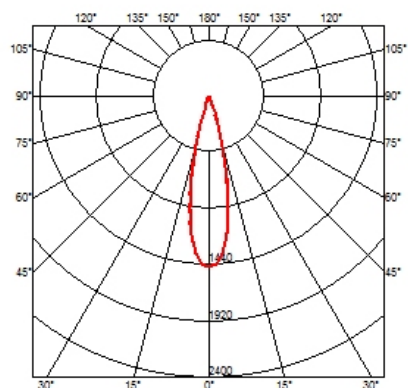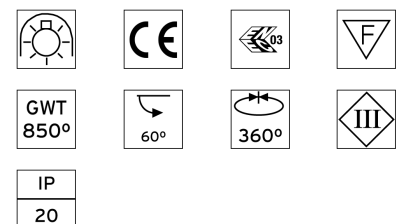

Pure I Downlight . Accessories


Mounting



08.8152.00

Installation Frame For No Trim

Installation frame for Pure I Downlight No Trim.



HOW TO ORDER



08.8149.30

08.8149.02

08.8149.14

Installation Frame For Trim

Installation frame for Pure I Downlight Trim.



Pure I Downlight designed by Knud Holscher

12V halogen lamp recessed downlight.
Remote transformer not included

09.1605.30	White
09.1605.02	Grey
09.1605.14	Black

Pure I Downlight . Lamps



60.6369

QR-70

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
BA15d

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6369

Lamp type:
QR-70



60.6370

QR-70

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
BA15d

Lamp angle:
8 °

Color temperature (K):
3000 °K

Catalog reference:
60.6370

Lamp type:
QR-70



60.6371

QR-70

Lamp Watt:
50 W

Lamp category:
Halogen low voltage


Socket:
BA15d

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6371

Lamp type:
QR-70

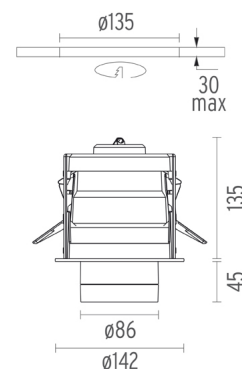

CERTIFICATIONS

