

## PURE I DOWNLIGHT

|                          |                                                                                                      |
|--------------------------|------------------------------------------------------------------------------------------------------|
| <b>Number of heads</b>   | 1                                                                                                    |
| <b>Mounting</b>          | Ceiling recessed                                                                                     |
| <b>Lamps description</b> | HI PAR 5I GX10 Max 35W                                                                               |
| <b>Bezel diameter</b>    | 142                                                                                                  |
| <b>Voltage (V)</b>       | 220/240                                                                                              |
| <b>Environment</b>       | Indoor                                                                                               |
| <b>Notes</b>             | To be completed with installation frame. Available as accessory element. Must be ordered separately. |

### OPTICAL

|                                     |                                     |
|-------------------------------------|-------------------------------------|
| <b>Light controller description</b> | Bare lamps                          |
| <b>Aiming</b>                       | Adjustable                          |
| <b>Light distribution symmetry</b>  | Symmetric                           |
| <b>Beam angle</b>                   | 12° Spot, 25° Flood, 40° Wide Flood |

### ELECTRICAL

|                                  |               |
|----------------------------------|---------------|
| <b>Control gear availability</b> | Separate item |
| <b>Control gear mounting</b>     | Remote        |
| <b>Emergency</b>                 | Without       |
| <b>Insulation class</b>          | Class II      |

### PHYSICAL


|                              |           |
|------------------------------|-----------|
| <b>Cutout diameter (mm)</b>  | 135       |
| <b>Spot diameter (mm)</b>    | 86        |
| <b>Construction material</b> | Aluminium |
| <b>Weight (kg)</b>           | 0,96      |





**Pure I Downlight**  
designed by Knud Holscher

Metal halide lamp recessed downlight.  
Remote control gear not included

|               |       |
|---------------|-------|
| ● 09.1610.30A | White |
| ● 09.1610.02A | Grey  |
| ● 09.1610.14A | Black |

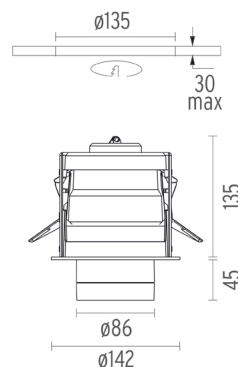

### CERTIFICATIONS

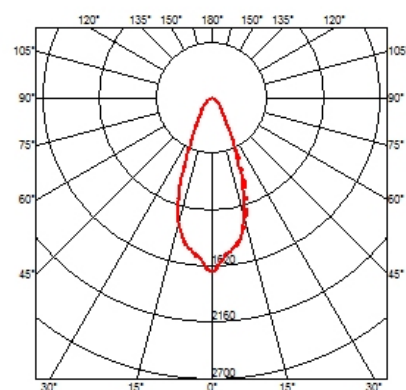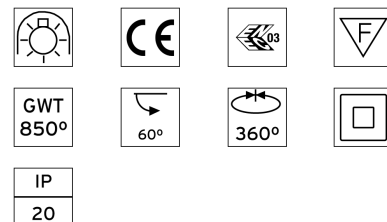

## Pure I Downlight . Accessories

### Optical



08.8166.14

**Holding ring**



08.8163.68

**Elliptical lens**


Elliptical light distribution lens in 4 mm thick tempered glass.



08.8169.14

**Honeycomb**


"Honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.



08.8160.64.OD

**Blue filter**


Blue filter



08.8160.65.OD

**Sky blue filter**


Sky blue filter



08.8160.66.OD

**Amber filter**

Amber filter



08.8160.67.OD

**Red filter**

Red filter



08.8160.98.OD

**U.V. filter**

U.V. filter



08.8160.68

**I.R. filter**


I.R. filter





**Pure I Downlight**  
designed by Knud Holscher

Metal halide lamp recessed downlight.  
Remote control gear not included

- |             |       |
|-------------|-------|
| 09.1610.30A | White |
| 09.1610.02A | Grey  |
| 09.1610.14A | Black |

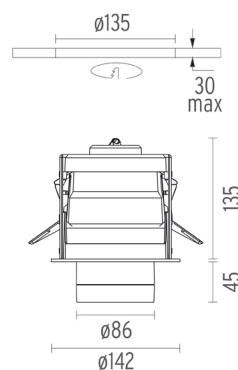

### CERTIFICATIONS

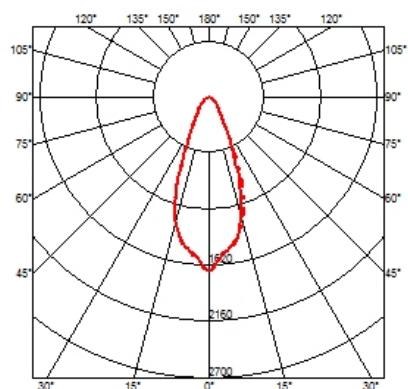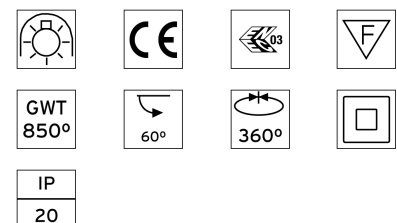


## Pure I Downlight . Accessories



08.8160.69

### Hot Light


Hot Light



08.8160.CL

### Cold light filter

Cold light filter



08.8160.DL

### Daylight filter

Daylight filter



### Pure I Downlight designed by Knud Holscher

Metal halide lamp recessed downlight.  
Remote control gear not included



08.8160.ND

### Neodimium



08.8175.68

### Flood lens

Flood lens made in press glass.



08.8232.30


08.8232.02

08.8232.14



### Pure I Pro external ring accessory

Pure I Pro external ring accessory.  
Only for halogen and halide lamps,  
consult for LED version

- 09.1610.30A White
- 09.1610.02A Grey
- 09.1610.14A Black

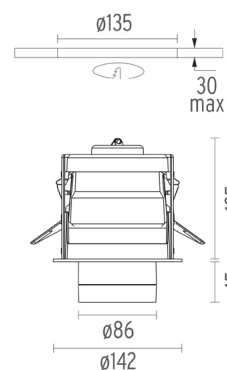


## CERTIFICATIONS

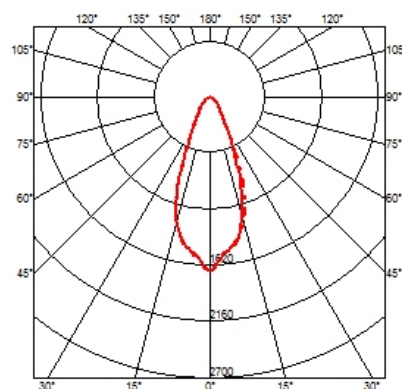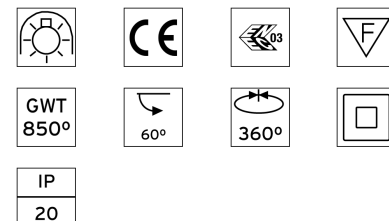

## Pure I Downlight . Accessories

### Mounting



08.8152.00

### HOW TO ORDER

#### Installation Frame For No Trim

Installation frame for Pure I Downlight No Trim.

08.8149.30

08.8149.02

08.8149.14

#### Installation Frame For Trim


Installation frame for Pure I Downlight Trim.

### Pure I Downlight designed by Knud Holscher

Metal halide lamp recessed downlight.  
Remote control gear not included

|             |       |
|-------------|-------|
| 09.1610.30A | White |
| 09.1610.02A | Grey  |
| 09.1610.14A | Black |

## Pure I Downlight . Lamps

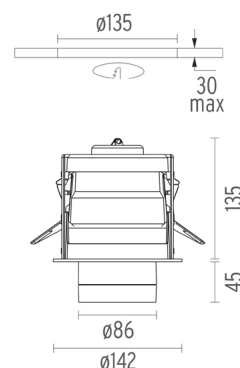

60.6576

#### HI PAR 51

Lamp Watt:  
20 W

Lamp category:  
Metal halide

Socket:  
GX10

Lamp angle:  
10 °

Color temperature (K):  
3000 °K

Catalog reference:  
60.6576

Lamp type:  
HI PAR 51

60.6577

#### HI PAR 51

Lamp Watt:  
20 W

Lamp category:  
Metal halide

Socket:  
GX10

Lamp angle:  
25 °

Color temperature (K):  
3000 °K

Catalog reference:  
60.6577

Lamp type:  
HI PAR 51

60.6578

#### HI PAR 51

Lamp Watt:  
20 W

Lamp category:  
Metal halide

Socket:  
GX10



Lamp angle:  
40 °

Color temperature (K):  
3000 °K

Catalog reference:  
60.6578

Lamp type:  
HI PAR 51

### CERTIFICATIONS

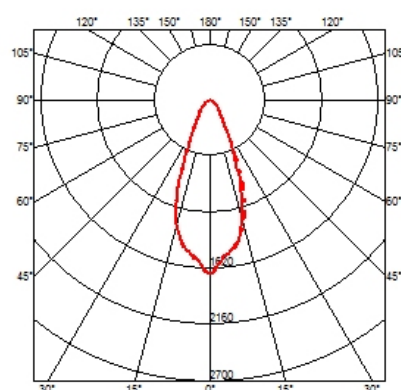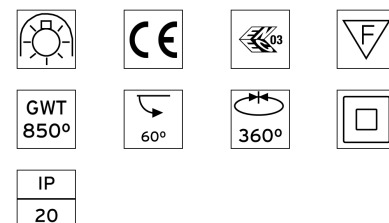

## Pure I Downlight . Lamps



60.6637

**HI PAR 51**

**Lamp Watt:**  
35 W

**Lamp category:**  
Metal halide

**Socket:**  
GX10

**Lamp angle:**  
25 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6637

**Lamp type:**  
HI PAR 51



60.6638

**HI PAR 51**

**Lamp Watt:**  
35 W

**Lamp category:**  
Metal halide

**Socket:**  
GX10

**Lamp angle:**  
40 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6638

**Lamp type:**  
HI PAR 51



60.6636

**HI PAR 51**

**Lamp Watt:**  
35 W

**Lamp category:**  
Metal halide

**Socket:**  
GX10

**Lamp angle:**  
10 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6636


**Lamp type:**  
HI PAR 51



**Pure I Downlight**  
designed by Knud Holscher

Metal halide lamp recessed downlight.  
Remote control gear not included

|             |       |
|-------------|-------|
| 09.1610.30A | White |
| 09.1610.02A | Grey  |
| 09.1610.14A | Black |

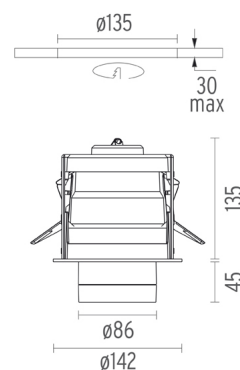

## CERTIFICATIONS

