

## PURE I DOWNLIGHT

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	QT-I2 GY6.35 Max 50W
<b>Voltage (V)</b>	12
<b>Environment</b>	Indoor
<b>Notes</b>	To be completed with installation frame. Available as accessory element. Must be ordered separately.

### OPTICAL

<b>Light controller description</b>	Protection glass
<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	57° Wide Flood

### ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Emergency</b>	Without
<b>Insulation class</b>	Class III

### PHYSICAL


<b>Cutout diameter (mm)</b>	135
<b>Spot diameter (mm)</b>	86
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	0,96





**Pure I Downlight**  
designed by Knud Holscher

12V halogen lamp recessed downlight.  
Remote transformer not included

● 09.1617.30	White
● 09.1617.02	Grey
● 09.1617.14	Black

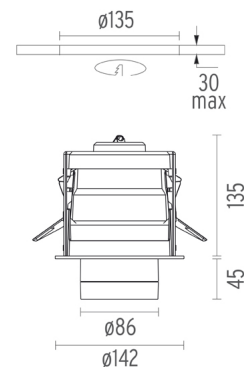

### CERTIFICATIONS

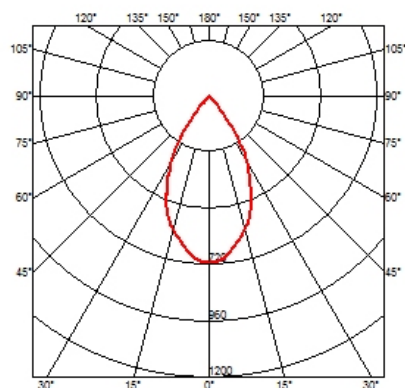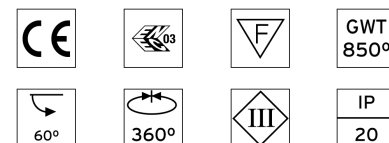

## Pure I Downlight . Accessories

### Optical



08.8166.14

**Holding ring**



08.8163.68

**Elliptical lens**

Elliptical light distribution lens in 4 mm thick tempered glass.



08.8169.14

**Honeycomb**


"Honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.



**Pure I Downlight**  
designed by Knud Holscher

12V halogen lamp recessed downlight.  
Remote transformer not included


- 09.1617.30 White
- 09.1617.02 Grey
- 09.1617.14 Black



08.8160.64.OD

**Blue filter**

Blue filter



08.8160.65.OD

**Sky blue filter**



Sky blue filter



08.8160.66.OD

**Amber filter**

Amber filter

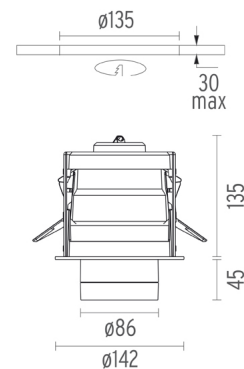

08.8160.67.OD

**Red filter**

Red filter



08.8160.98.OD

**U.V. filter**

U.V. filter





08.8160.68

**I.R. filter**

I.R. filter

### CERTIFICATIONS

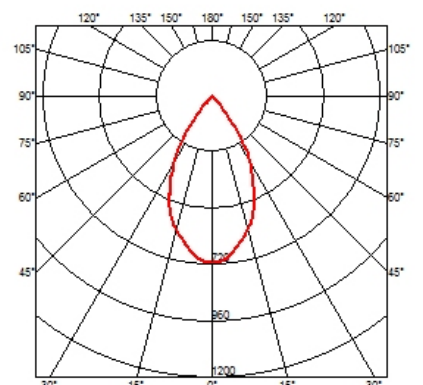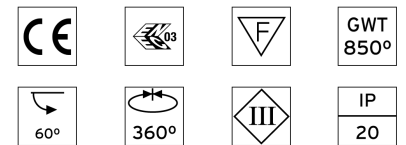


## Pure I Downlight . Accessories



08.8160.69

### Hot Light


Hot Light



08.8160.CL

### Cold light filter

Cold light filter



08.8160.DL

### Daylight filter

Daylight filter



### Pure I Downlight designed by Knud Holscher

12V halogen lamp recessed downlight.  
Remote transformer not included

- 09.1617.30 White
- 09.1617.02 Grey
- 09.1617.14 Black



08.8160.ND

### Neodimium



○ 08.8175.68

### Flood lens

Flood lens made in press glass.




● 08.8232.30

● 08.8232.02



● 08.8232.14

### Pure I Pro external ring accessory

Pure I Pro external ring accessory.  
Only for halogen and halide lamps,  
consult for LED version




### CERTIFICATIONS

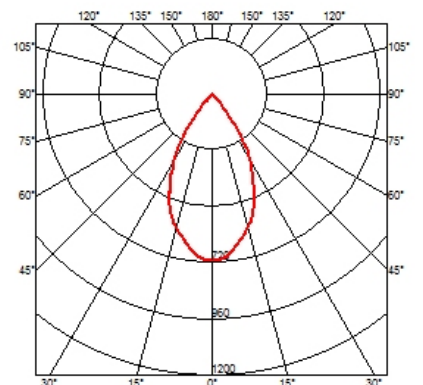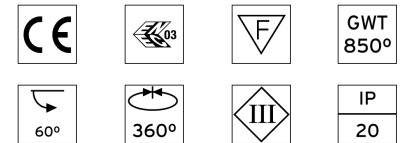

## Pure I Downlight . Accessories

### Mounting



08.8152.00

#### Installation Frame For No Trim

Installation frame for Pure I Downlight No Trim.

#### HOW TO ORDER

- 08.8149.30
- 08.8149.02
- 08.8149.14

#### Installation Frame For Trim

Installation frame for Pure I Downlight Trim.

#### Pure I Downlight designed by Knud Holscher

12V halogen lamp recessed downlight.  
Remote transformer not included

- 09.1617.30 White
- 09.1617.02 Grey
- 09.1617.14 Black

### Pure I Downlight . Lamps



60.6300

#### QT-12

**Lamp Watt:**  
35 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GY6.35

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6300

**Lamp type:**  
QT-12

60.6303

#### QT-12

**Lamp Watt:**  
50 W


**Lamp category:**  
Halogen low voltage

**Socket:**  
GY6.35

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6303

**Lamp type:**  
QT-12

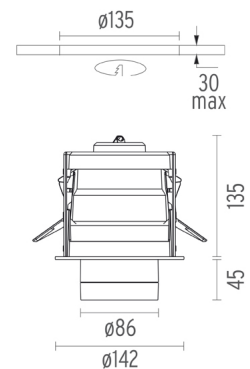

#### CERTIFICATIONS

