

PURE I DOWNLIGHT

Number of heads	1
Mounting	Ceiling recessed
Lamps description	CDM-TM PGJ5 Max 35W
Voltage (V)	220/240
Environment	Indoor
Notes	To be completed with installation frame. Available as accessory element. Must be ordered separately.

OPTICAL

Light controller description	Protection glass
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	54° Wide Flood

ELECTRICAL

Control gear availability	Separate item
Control gear mounting	Remote
Emergency	Without
Insulation class	Class II

PHYSICAL


Cutout diameter (mm)	135
Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	0,96




Pure I Downlight
designed by Knud Holscher

Metal halide lamp recessed downlight.
Remote control gear not included

● 09.1622.30	White
● 09.1622.02	Grey
● 09.1622.14	Black

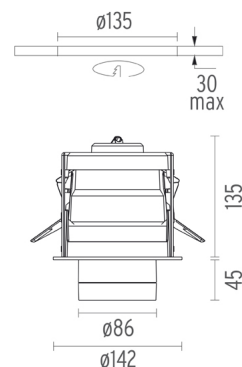

CERTIFICATIONS



Pure I Downlight . Accessories

Optical



08.8166.14

Holding ring



08.8163.68

Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass.



08.8169.14

Honeycomb


"Honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.



Pure I Downlight
designed by Knud Holscher

Metal halide lamp recessed downlight.
Remote control gear not included


- 09.1622.30 White
- 09.1622.02 Grey
- 09.1622.14 Black



08.8160.64.OD

Blue filter


Blue filter



08.8160.65.OD

Sky blue filter



Sky blue filter



08.8160.66.OD

Amber filter

Amber filter



08.8160.67.OD

Red filter

Red filter



08.8160.98.OD

U.V. filter

U.V. filter




08.8160.68

I.R. filter

I.R. filter

CERTIFICATIONS

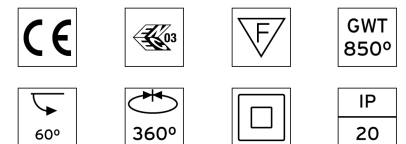


Pure I Downlight . Accessories



08.8160.69

Hot Light


Hot Light



08.8160.CL

Cold light filter

Cold light filter



08.8160.DL

Daylight filter

Daylight filter



Pure I Downlight

designed by Knud Holscher

Metal halide lamp recessed downlight.
Remote control gear not included

- 09.1622.30 White
- 09.1622.02 Grey
- 09.1622.14 Black



08.8160.ND

Neodimium



○ 08.8175.68

Flood lens

Flood lens made in press glass.




● 08.8232.30

● 08.8232.02

● 08.8232.14

Pure I Pro external ring accessory

Pure I Pro external ring accessory.
Only for halogen and halide lamps,
consult for LED version





CERTIFICATIONS



Pure I Downlight . Accessories

Mounting



08.8152.00

Installation Frame For No Trim

Installation frame for Pure I Downlight No Trim.

HOW TO ORDER

- 08.8149.30
- 08.8149.02
- 08.8149.14

Installation Frame For Trim

Installation frame for Pure I Downlight Trim.

Pure I Downlight designed by Knud Holscher

Metal halide lamp recessed downlight.
Remote control gear not included

- 09.1622.30 White
- 09.1622.02 Grey
- 09.1622.14 Black

Pure I Downlight . Lamps



60.6149

CDM-Tm

Lamp Watt:

20 W

Lamp category:

Metal halide

Socket:

PGJ5

Color temperature (K):

3000 °K

Catalog reference:

60.6149

Lamp type:

CDM-Tm



60.6151

CDM-Tm

Lamp Watt:

35 W

Lamp category:

Metal halide

Socket:

PGJ5

Color temperature (K):


3000 °K

Catalog reference:

60.6151

Lamp type:

CDM-Tm

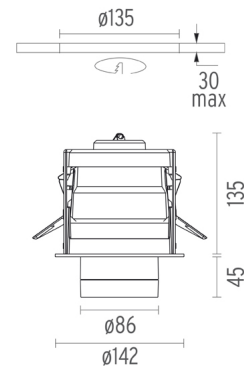

CERTIFICATIONS

