

PURE | DOWNLIGHT

Number of heads	1
Mounting	Ceiling recessed
Lamps description	Phosphor LED 11,9W 1057 lm 3000K CRI 98
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	To be completed with installation frame. Available as accessory element. Must be ordered separately.

OPTICAL

Light controller description	Reflector
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	23° Medium

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class II

PHYSICAL


Cutout diameter (mm)	135
Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	0,96




Pure I Downlight
designed by Knud Holscher

LED recessed downlight. Phosphor LED module integrated. Remote electronic transformer 220/240V included.

● 09.1630.30C - 725lm	White
● 09.1630.02C - 725lm	Grey
● 09.1630.14C - 725lm	Black

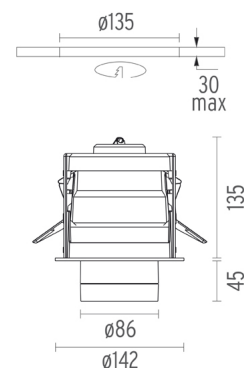

CERTIFICATIONS



Pure I Downlight . Accessories

Optical



08.8166.14

Holding ring



08.8163.68

Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass.



08.8169.14

Honeycomb


"Honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.



Pure I Downlight
designed by Knud Holscher

LED recessed downlight. Phosphor LED module integrated. Remote electronic transformer 220/240V included.


- 09.1630.30C - 725lm White
- 09.1630.02C - 725lm Grey
- 09.1630.14C - 725lm Black



08.8160.64.OD

Blue filter


Blue filter



08.8160.65.OD

Sky blue filter



Sky blue filter



08.8160.66.OD

Amber filter

Amber filter



08.8160.67.OD

Red filter

Red filter



08.8160.98.OD

U.V. filter

U.V. filter




08.8160.68

I.R. filter

I.R. filter

CERTIFICATIONS

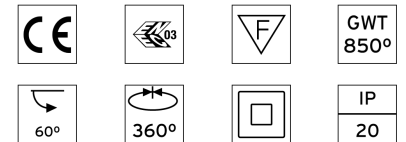


Pure I Downlight . Accessories



08.8160.69

Hot Light


Hot Light



08.8160.CL

Cold light filter

Cold light filter



08.8160.DL

Daylight filter

Daylight filter



Pure I Downlight

designed by Knud Holscher

LED recessed downlight. Phosphor LED module integrated. Remote electronic transformer 220/240V included.

- 09.1630.30C - 725lm White
- 09.1630.02C - 725lm Grey
- 09.1630.14C - 725lm Black



08.8160.ND

Neodimium



○ 08.8175.68

Flood lens

Flood lens made in press glass.




● 08.8232.30

● 08.8232.02

● 08.8232.14

Pure I Pro external ring accessory

Pure I Pro external ring accessory. Only for halogen and halide lamps, consult for LED version





CERTIFICATIONS



Pure I Downlight . Accessories

Mounting



08.8152.00

Installation Frame For No Trim

Installation frame for Pure I Downlight No Trim.

HOW TO ORDER

- 08.8149.30
- 08.8149.02
- 08.8149.14

Installation Frame For Trim

Installation frame for Pure I Downlight Trim.

Pure I Downlight designed by Knud Holscher

LED recessed downlight. Phosphor LED module integrated. Remote electronic transformer 220/240V included.

- 09.1630.30C - 725lm White
- 09.1630.02C - 725lm Grey
- 09.1630.14C - 725lm Black

Pure I Downlight . Lamps




Phosphor LED

Lamp category:

LED

Lamp type:

Phosphor LED

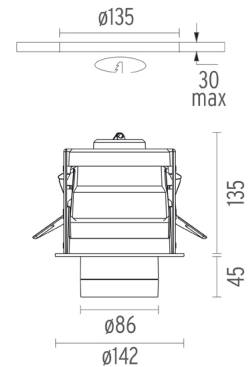

CERTIFICATIONS

