FLOS

PURE I DOWNLIGHT I-10V

Number of heads

Mounting Ceiling recessed

Lamps descriptionPhosphor LED 11,9W 1057 Im 3000K CRI 98Luminaire luminous fluxExtreme Cut-off. See reference number

Voltage (V) 220/240 Environment Indoor

Notes To be completed with installation frame. Available as

accessory element. Must be ordered separately.

OPTICAL

Light controller descriptionReflectorAimingAdjustableLight distribution symmetrySymmetricBeam angle46° Flood

ELECTRICAL

Transformer availability Included
Transformer mounting Remote


Transformer type Electronic dimmable I-10V

EmergencyWithoutInsulation classClass II

PHYSICAL

Cutout diameter (mm) 135 Spot diameter (mm) 86

Construction material Aluminium
Weight (kg) 0,96

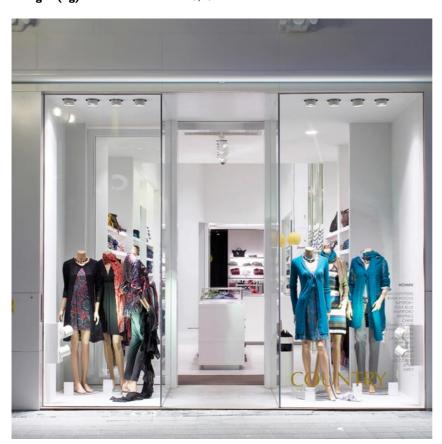




Pure I Downlight I-10V designed by Knud Holscher

LED recessed downlight. Phosphor LED module integrated. Remote electronic transformer 220/240V included.

09.1631.30CIV - 797lm White
09.1631.02CIV - 797lm Grey
09.1631.14CIV - 797lm Black



CERTIFICATIONS






















Pure I Downlight I-I0V. Accessories

Optical









08.8166.14

Holding ring

08.8163.68

Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass. 08.8169.14

Honeycomb

"Honeycomb" anti-glare screen: in thin, blackpainted aluminium sheets.

Pure I Downlight I-I0V designed by Knud Holscher

LED recessed downlight. Phosphor LED module integrated. Remote electronic transformer 220/240V included.

09.1631.30CIV - 797lm 09.1631.02CIV - 797lm


Grey 09.1631.14CIV - 797lm Black

White









08.8160.64.OD

Blue filter

Blue filter

08.8160.65.OD


Sky blue filter

Sky blue filter

08.8160.66.OD

Amber filter

Amber filter




















ΙP

08.8160.68

I.R. filter

I.R. filter





08.8160.67.OD

Red filter

Red filter

08.8160.98.OD U.V. filter

U.V. filter

Flos.architectural@flos.com www.flos.com



Pure I Downlight I-I0V. Accessories









08.8160.69

Hot Light

Hot Light

08.8160.CL

Cold light filter

Cold light filter

08.8160.DL

Daylight filter

Daylight filter


Pure I Downlight I-I0V designed by Knud Holscher

LED recessed downlight. Phosphor LED module integrated. Remote electronic transformer 220/240V included.









08.8160.ND

Neodimium

08.8175.68

Flood lens

Flood lens made in press glass.


08.8232.30

08.8232.02

08.8232.14

Pure I Pro external ring accessory

Pure I Pro external ring accessory. Only for halogen and halide lamps, consult for LED version






















CERTIFICATIONS







Flos.architectural@flos.com

www.flos.com



Pure I Downlight I-I0V. Accessories

Mounting



2

08.8152.00

Installation Frame For No Trim

Installation frame for Pure I Downlight No Trim.

HOW TO ORDER

08.8149.30

08.8149.02

08.8149.14


Installation Frame For Trim

Installation frame for Pure I Downlight Trim.

Pure I Downlight I-10V designed by Knud Holscher

LED recessed downlight. Phosphor LED module integrated. Remote electronic transformer 220/240V included.

09.1631.30CIV - 797lm White
09.1631.02CIV - 797lm Grey
09.1631.14CIV - 797lm Black



Pure I Downlight I-I0V . Lamps



Phosphor LED Lamp category:

LED

Lamp type:

Phosphor LED

CERTIFICATIONS




















Flos.architectural@flos.com www.flos.com