FLOS

PURE I DOWNLIGHT DALI

L

Adjustable

46° Flood

Number of heads Mounting Lamps description Luminaire luminous flux Voltage (V) Environment

Ceiling recessed Phosphor LED 11,9W 1057 Im 3000K CRI 98 Extreme Cut-off. See reference number 220/240 Indoor

OPTICAL

Light controller description Reflector Aiming Light distribution symmetry Symmetric Beam angle

ELECTRICAL

Transformer availability **Transformer mounting Transformer type** Emergency Insulation class

Included Remote Electronic dimmable dali Without Class II

PHYSICAL

Cutout diameter (mm) Spot diameter (mm) **Construction material** Weight (kg)









Pure I Downlight Dali designed by Knud Holscher

LED recessed downlight. Phosphor LED module integrated. Remote electronic transformer 220/240V included.

09.1631.30CDA - 797lm	White
09.1631.02CDA - 797lm	Grey
09.1631.14CDA - 797lm	Black



CERTIFICATIONS




GWT 850°
IP
20

FLOS


Pure I Downlight Dali . Accessories


Optical

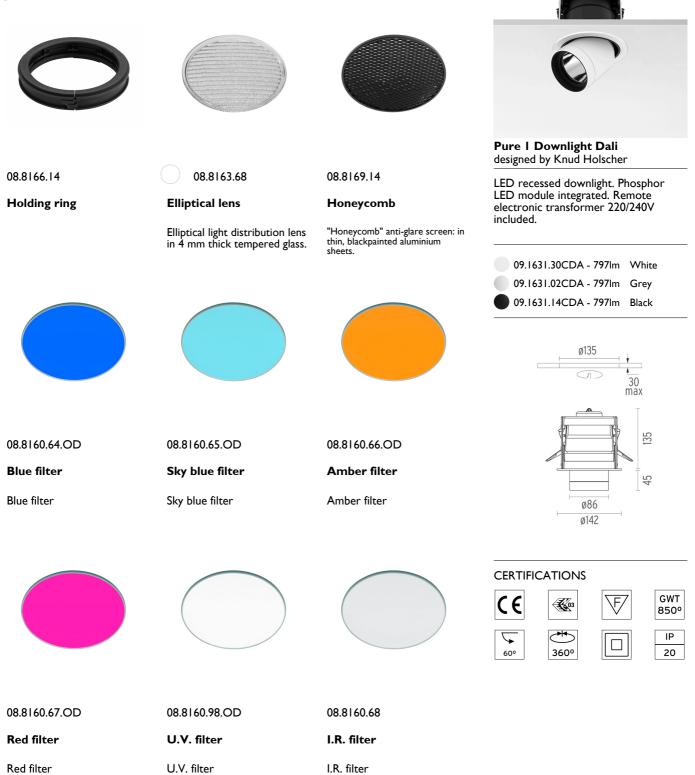

FLOS


Pure I Downlight Dali . Accessories

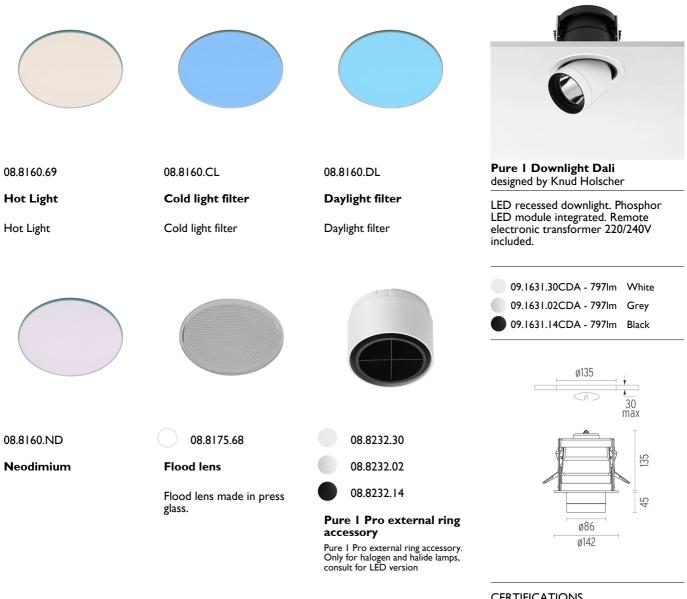



Pure | Downlight Dali . Accessories


Mounting

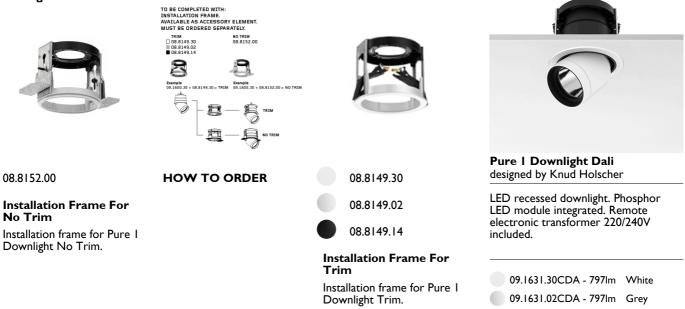

Pure | Downlight Dali . Lamps



Phosphor LED Lamp category: LED Lamp type: Phosphor LED



09.1631.02CDA - 797lm Grey 09.1631.14CDA - 797Im Black

ø135

4 30 max

