FLOS

PURE I DOWNLIGHT DALI

L

Reflector

Adjustable

Symmetric

Included

Remote

Without

Class II

Electronic dimmable dali

23° Medium

Number of heads Mounting Lamps description Luminaire luminous flux Voltage (V) Environment Notes

Ceiling recessed Phosphor LED 13,6W 1490 Im 3000K CRI 80 Extreme Cut-off. See reference number 220/240 Indoor To be completed with installation frame. Available as accessory element. Must be ordered separately.

OPTICAL

Light controller description Aiming Light distribution symmetry Beam angle

ELECTRICAL

Transformer availability Transformer mounting Transformer type Emergency Insulation class

PHYSICAL

Cutout diameter (mm) Spot diameter (mm) Construction material Weight (kg) 135 86 Aluminium 0,96







Pure I Downlight Dali designed by Knud Holscher


LED recessed downlight. Phosphor LED module integrated. Remote electronic transformer 220/240V included.

09.1635.30CDA - 1046lm White 09.1635.02CDA - 1046lm Grey 09.1635.14CDA - 1046lm Black



CERTIFICATIONS






FLOS


Pure I Downlight Dali . Accessories


Optical

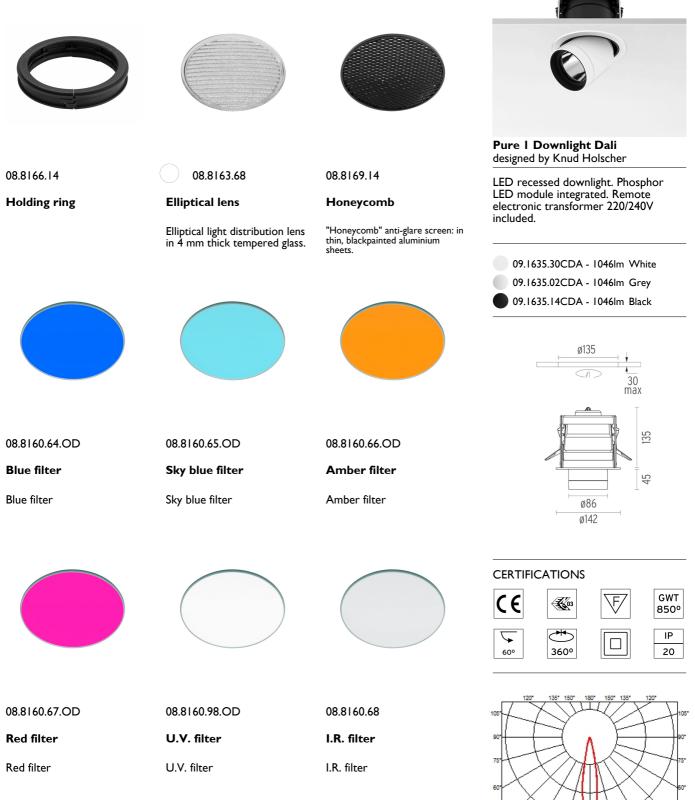


FLOS

Pure I Downlight Dali . Accessories

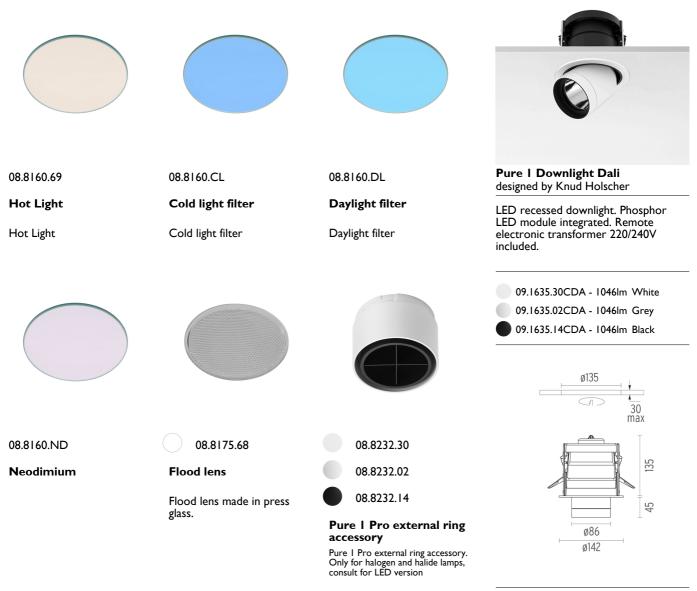






F (

Pure | Downlight Dali . Accessories

Mounting

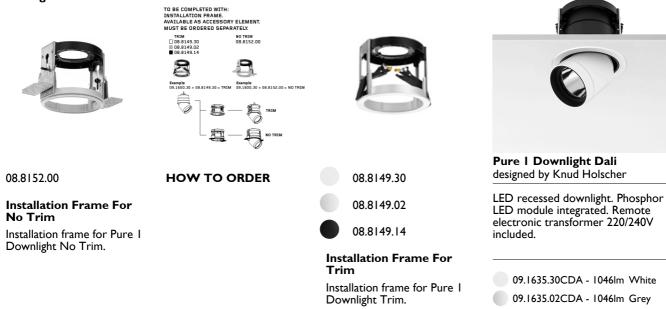


Pure I Downlight Dali . Lamps



Phosphor LED Lamp category: LED Lamp type:

Phosphor LED



09.1635.02CDA - 1046lm Grey 09.1635.14CDA - 1046lm Black

