FLOS

PURE I DOWNLIGHT DALI

L

Reflector

Adjustable

Symmetric

Included

Remote

Without

Class II

51° Wide Flood

Electronic dimmable dali

Number of heads Mounting Lamps description Luminaire luminous flux Voltage (V) Environment Notes

Ceiling recessed Phosphor LED 13,6W 1490 Im 3000K CRI 80 Extreme Cut-off. See reference number 220/240 Indoor To be completed with installation frame. Available as accessory element. Must be ordered separately.

OPTICAL

Light controller description Aiming Light distribution symmetry Beam angle

ELECTRICAL

Transformer availability Transformer mounting Transformer type Emergency Insulation class

PHYSICAL

Cutout diameter (mm) Spot diameter (mm) Construction material Weight (kg) 135 86 Aluminium

0,96







Pure I Downlight Dali designed by Knud Holscher

LED recessed downlight. Phosphor LED module integrated. Remote electronic transformer 220/240V included.

09.1637.30CDA - 1075lm White 09.1637.02CDA - 1075lm Grey 09.1637.14CDA - 1075lm Black



CERTIFICATIONS




GWT 850°
IP
20

FLOS


Pure I Downlight Dali . Accessories


Optical

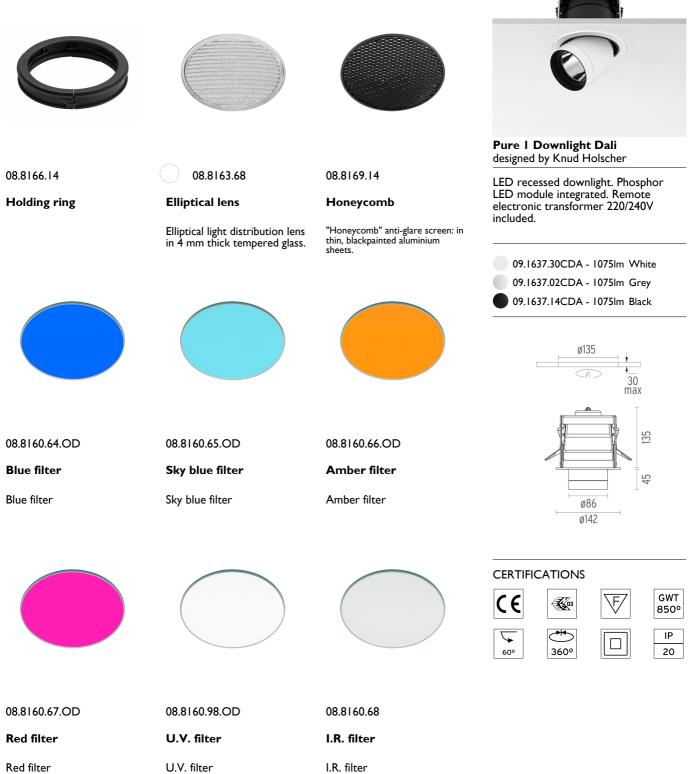

FLOS


Pure I Downlight Dali . Accessories

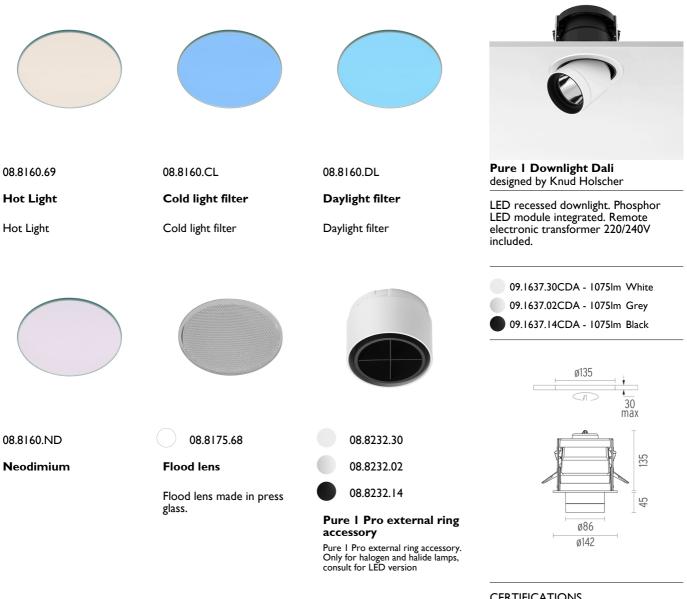



Pure | Downlight Dali . Accessories

Mounting

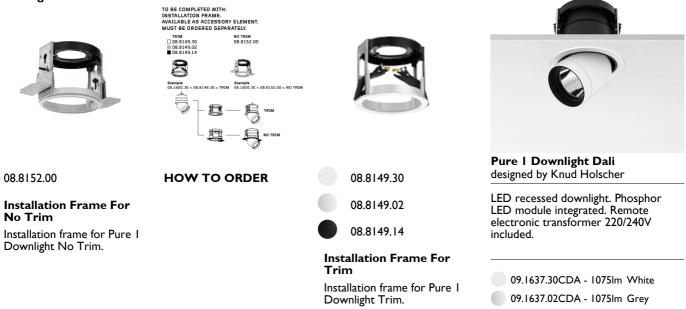

Pure I Downlight Dali . Lamps



Phosphor LED Lamp category: LED Lamp type: Phosphor LED

CERTIFICATIONS GWT CE F **K**03 850° ₩ \checkmark 60°

ø86 ø142

09.1637.02CDA - 1075lm Grey 09.1637.14CDA - 1075Im Black

ø135

5

4 30 max

135

45

IP

20

